


Fitting for top-running wooden doors up to 40 kg (88 lbs.), with surface mounted running track or running track flush with the ceiling. Optionally with soft and self closing mechanism. Wall or ceiling mounting. Wall pocket solution.

### Product highlights


- Flexibility** The running track can be installed and removed at any time
- Aesthetics** Thanks to integrated spring stop with Push-to-open function, there are no visible hardware components, door milling grooves or spring handles at the edge of the door

### Technical specifications







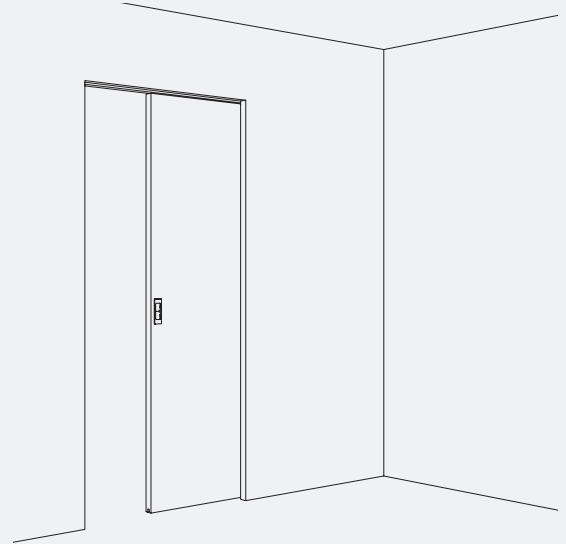- Max. 40 kg (88 lbs.)
- Max. 4000 mm (13'1 15/32")
- Max. 1250 mm (4'1 7/32")
- 35–80 mm (1 3/8" to 3 5/32")

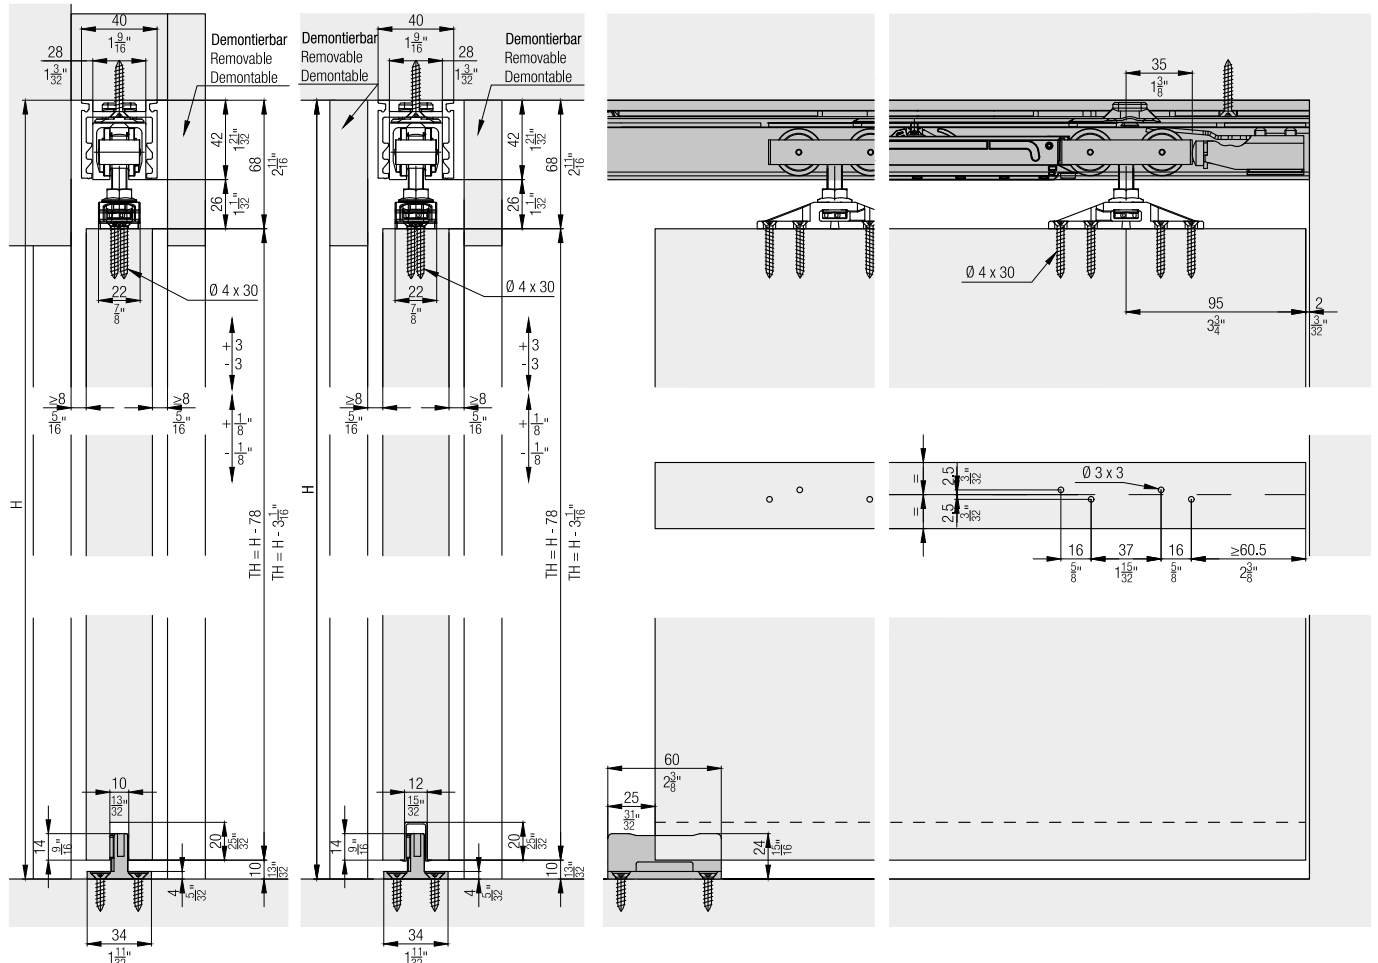


### Installation examples




**Set for 1 wooden door up to 40 kg (88 lbs.)**

|   |  | No.     |
|---|--|---------|
| Hawa Junior 40 Z, for 1 door  |  | 25902   |
|   |  | No.     |
| <b>Set consisting of:</b>   |  | 25902   |
|    | Two-wheeled running gear, M8, plastic wheels                                   | 2 25898 |
|    | Stopper, with adjustable retention spring                                      | 1 10640 |
|    | Two-way suspension flange, with screw M8 and fixing screws, steel, zinc-plated | 2 10488 |
|    | Bottom guide, zero tolerance, groove width 10 mm (13/32"), plastic black       | 1 14427 |
|   | Screw-on rubber door stop  | 1 10629 |
|  | Vertical adjustment pin  | 1 10795 |





**Running tracks**

|   |  | mm (inch)           | No.   |
|---|--|---------------------|-------|
|  | Running track, aluminum, anodized, pre-drilled | 1,400 (4' 7 1/8 ")  | 10213 |
|   |  | 1,600 (5' 3 ")      | 10214 |
|   |  | 1,800 (5' 10 7/8 ") | 10215 |
|   |  | 2,000 (6' 6 3/4 ")  | 10216 |
|   |  | 2,500 (8' 2 7/16 ") | 25997 |
|   |  | cut to size         | 10217 |


**Guide tracks**

|   |   | mm (inch)           | No.   |
|---|---|---------------------|-------|
|  | Guide track, for groove mounting, plastic, 10-piece set | 1,300 (4' 3 3/16 ") | 14540 |

**Assembly set**


|   |  | No.                         |
|---|--|-----------------------------|
| Set for mountable and demountable running track, up to 2000 mm (6'6 3/4")           |  | 25990                       |
| Set for mountable and demountable running track, up to 2500 mm (8'2 7/16")          |  | 25992                       |
|   |  | No.                         |
| <b>Set consisting of:</b>   |  | mm (inch) 25990 25992       |
|    | Retainer profile with a bayonet lock, aluminum, anodized | 2,000 (6' 6 3/4 ") 1 25913  |
|    | Small parts to retainer profile, 6-piece set             | 1 25989                     |
|   | Retainer profile with a bayonet lock, aluminum, anodized | 2,500 (8' 2 7/16 ") 1 25914 |
|  | Small parts to retainer profile, 7-piece set             | 1 25991                     |

**Panels**



|   |  | mm (inch)          | No.   |
|---|--|--------------------|-------|
|  | Clip-on panel to retainer profile, for fascia mounting, aluminum, anodized | 2,000 (6' 6 3/4 ") | 25985 |
|   | Clip-on panel to retainer profile, for lintel mounting, aluminum, anodized | cut to size        | 27694 |

**Soft close SoftMove 40**

**For soft closing in opening and closing direction order 2 sets.**


|   |                        | No.   |
|---|------------------------|-------|
|  | Soft close SoftMove 40 | 25987 |

**Accessories**

|   |   | No.   |
|---|---|-------|
|  | Spring loaded stopper Hawa Junior 40  | 27200 |
|  | Bottom guide, rattle proof, groove width 10 mm (13/32"), plastic, black, 10-piece set | 25958 |

### Calculations of running track length


The length of the running track must be shorter than the diagonal clearance (P2) by at least 80 mm (3 5/32").

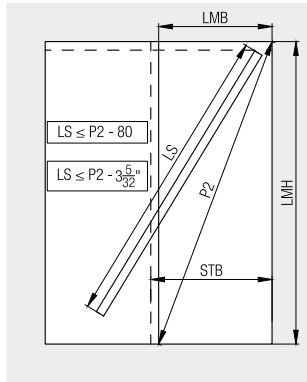

LMB = inside clearance  
LMH = inside height  
STB = sliding door width  
P2 = diagonal clearance  
LS = running track

### Spring stop


The specially developed spring stop for ejecting the door is integrated into the running track without visible fittings on the door edge.

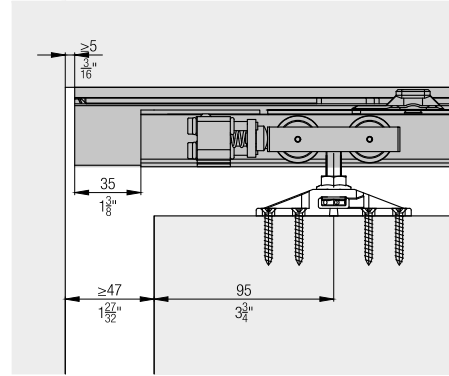

### Calculations of door width


The following factors affect the calculation of the width of the sliding door:

- Open or closed guide groove
- Construction with or without spring stop (27200)

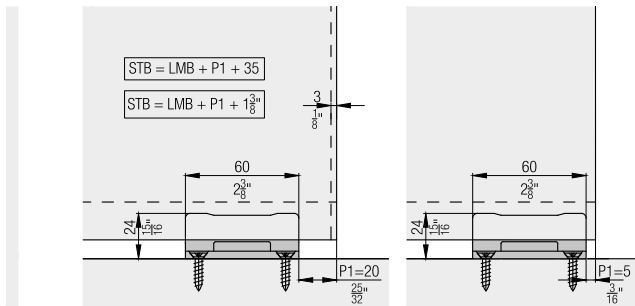



### Facing for the retainer profile

The optional clip-on panel made of aluminum can be clipped onto the retainer profile without additional fixing components. For invisible fastening of the lintel panelling, there is the option of covering the clip panel on site, using panels up to 40 mm (1 9/16") thick.



### SoftMove 40 soft closing mechanism

Completely integrated into the running track, the SoftMove 40 decelerates sliding doors and draws them into their final position.

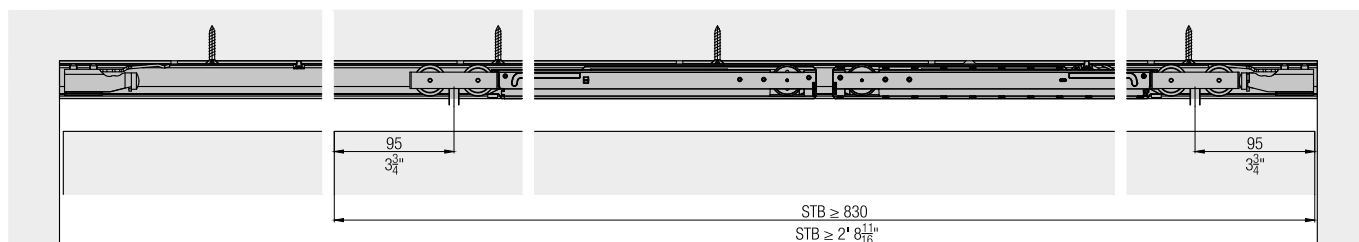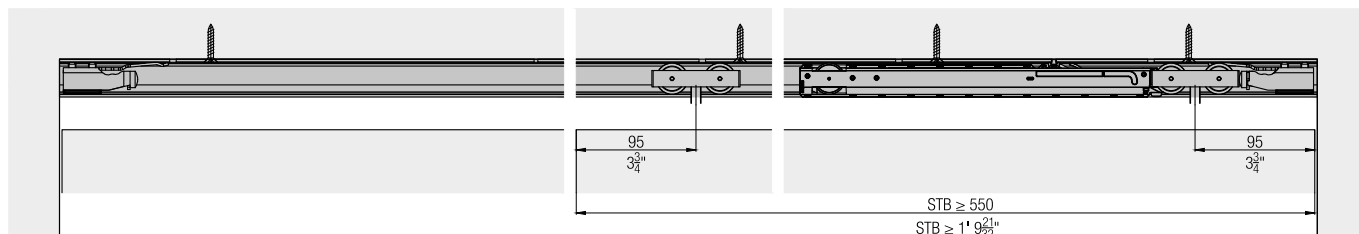

#### Accessories

- Hawa Junior bottom guides for wall mounting from page 508
- Lock solutions from page 511
- General accessories from page 518

#### Planning/execution

Further information about the product can be found on [www.hawa.com](http://www.hawa.com).