Fitting for top-running wooden doors up to 80 kg (176 lbs.), with surface mounted running track. Optionally with soft and self closing mechanism. Ceiling mounting. Wall pocket solution.

Product highlights

♦ Flexibility

The running track can be installed and removed at

any time

Aesthetics

Thanks to integrated spring stop with Push-to-open function, there are no visible hardware components, door milling grooves or spring handles at the edge of

the door

Technical specifications

Max. 80 kg (176 lbs.)


↑ Max. 4000 mm (13'1 15/32'')

★ Max. 1500 mm (4'11 1/16'')

35–80 mm (1 3/8'' to 3 5/32'')



Installation examples

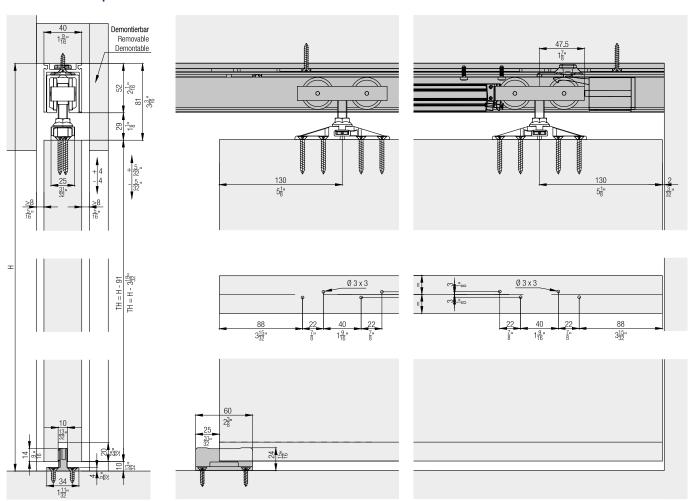

Set for 1 wooden door up to 80 kg (176 lbs.)

			No.
Hawa Junior 80	Hawa Junior 80 Z, with 1 track stopper, for 1 door		11705
Set consisting of:		11705	No.
	Running gear, 2-wheeled, M10, plastic wheels	2	10407
	Stopper Hawa Junior 80/100, with adjustable retention spring	1	30138
	Two-way suspension flange, with screw M10 and fixing screws, steel, zinc-plated	2	10489
	Bottom guide, zero tole- rance, groove width 10 mm (13/32"), plastic black	1	14427
(A)	Screw-on rubber door stop	1	10629
	Vertical adjustment pin	1	10795

Accessories for set

	No.
Stopper Hawa Junior 80/100, with adjustable retention spring	30138
SoftStop Hawa Junior 80/100, with adjustable retention spring	27771
Spring loaded stopper Hawa Junior 80/100	25370

Running tracks

		mm (inch)	No.
		1,400 (4' 7 1/8 '')	10189
		1,600 (5' 3 '')	10190
		1,800 (5' 10 7/8 '')	10191
	Running track,	2,000 (6' 6 3/4 '')	10192
	aluminum, anodized, pre-drilled	2,200 (7' 2 5/8 '')	10193
		2,500 (8' 2 7/16")	10194
		3,000	18532
		cut to size	10188

Guide tracks

	mm (inch)	No.
Guide track, for groove mounting, plastic, 10-piece set	1,300 (4' 3 3/16'')	14540

Assembly set, up to 2000 mm (6'6 3/4")

with a bayonet

lock, aluminum, anodized

Small parts to retainer profile, 6-piece set

			No.
Set for mountable and demountable running track			25207
Set consisting of:	mm (inch)	25207	No.
Retainer profile			

2,035

(6'8 1/8'')

25212

25520

Assembly set, up to 2500 mm (8'2 7/16")

	No.
Set for mountable and demountable running track	25371

Set consisting	of:	mm (inch)	25371	No.
	Retainer profile with a bayonet lock, aluminum, anodized	2,535 (8'3 13/16'')	1	25443
1.00	Small parts to retai profile, 7-piece set	ner	1	25521

Assembly set, up to 3000 mm (9'10 1/8")

	No.
Set for mountable and demountable running track	25441

		mm	25441	No.
Set consisting	of:	(inch)	25	
	Retainer profile with a bayonet lock, aluminum, anodized	3,035 (9'11 1/2'')	1	25444
	Small parts to retai profile, 9-piece set		1	25522


Panels

	mm (inch)	No.
Clip-on panel, for fascia mounting,	2,000 (6'6 3/4'')	25445
aluminum, anodized	cut to size	27693


Soft close SoftMove 80 For soft closing in opening and closing direction order 2 sets.

		No.
J J3	Soft closing mechanism SoftMove 80	22444

Accessories




Further installation examples



Calculations of running track length


The length of the running track must be shorter than the diagonal clearance (P2) by at least 80 mm (3 5/32'').



LMB = inside clearance LMH = inside height STB = sliding door width P2 = diagonal clearance LS = running track


Facing for the retainer profile

The optional clip-on panel made of aluminum can be clipped onto the retainer profile without additional fixing components. For invisible fastening of the lintel panelling, there is the option of covering the clip panel on site, using panels up to 40 mm (1 9/16") thick.



Spring stop


The specially developed spring stop for ejecting the door is integrated into the running track without visible fittings on the door edge.

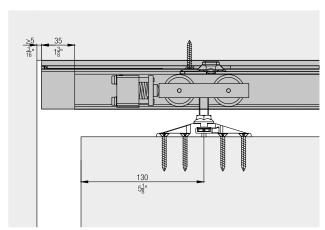


Calculations of door width

The following factors affect the calculation of the width of the sliding door:

- Open or closed guide groove
- Construction with or without spring stop (25370)

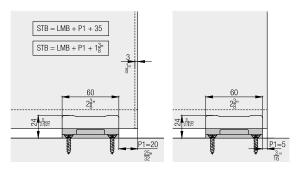


Bottom guide with guide track



SoftMove 80 soft closing mechanism

Completely integrated into the running track, the SoftMove decelerates sliding doors and draws them into their final position.

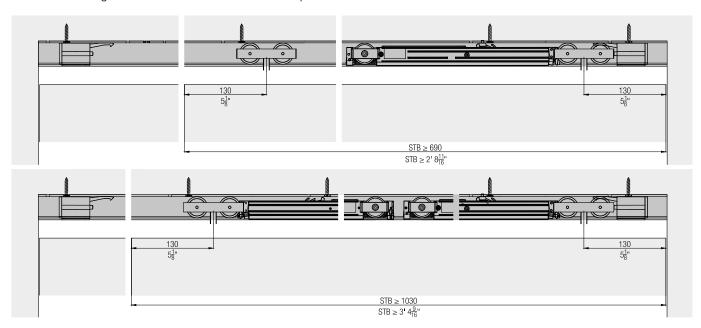

Accessories

- Hawa Junior bottom guides for wall mounting from page 508
- Lock solutions from page 511
- General accessories from page 518

Planning/execution

Further information about the product can be found on www.hawa.com.