Fitting for top-running wooden doors up to 40 kg (88 lbs.), with surface mounted running track. Optionally with soft and self closing mechanism. Wall mounting.

Product highlights

Flexibility Multi-faceted product range, same parts for

wooden and glass solutions


Productivity No door processing, continuous adjustment for

minimal production times

Technical specifications


Max. 40 kg (88 lbs.)
↑ Max. 2200 mm (7'2 5/8")
★ Max. 1000 mm (3'3 3/8")


18-30 mm (23/32" to 1 3/16")





Installation examples

 $\rightarrow \, \, \Big[($



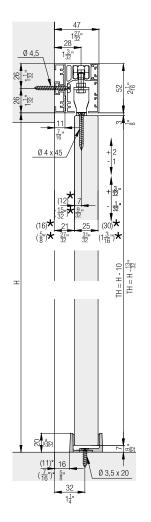



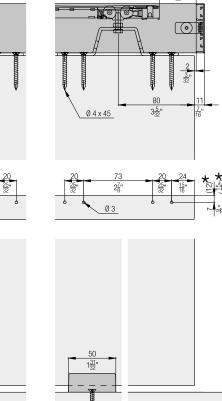

Set for wall mounting, for 1 wooden door up to 40 kg (88 lbs.)

		No.	
Hawa Porta 40 H, for 1 door			057.3168.071
Set consisting of:		057.3168.071	No.
	Running gear, plain bearings, rollers, plastic, white	2	057.3149.071
	Stopper, plastic, gray	2	057.3148.071
	Hexagon screw, M5x18 mm (3/16"x23/32"), steel, zinc-plated	2	600.0000.646
	Prevailing torque, M5, steel, zinc-plated	2	600.0000.459
	Support bracket, steel, zinc-plated	2	057.3165.101
	Countersunk head screw, 4x45 mm (5/32"x1 25/32"), steel, zinc-plated	8	600.0000.727
	Bottom guide, left, plastic, gray	1	057.3167.072
	Bottom guide, right, plastic, gray	1	057.3167.071
	Countersunk head screw, 3.5x20 mm (5/32"x25/32"), steel, zinc-plated	1	600.0000.728

Set for wall mounting, for 1 wooden door up to 40 kg (88 lbs.)

			No.	
Hawa Porta 40 H, for 1 door, incl. soft close and tracks, L= 2000 mm (6' 6 3/4")				057.3168.072
Set consisting	of:	mm (inch)	057.3168.072	No.
	Soft close, up to 40 (88 lbs.), running ge premounted		2	057.3158.073
100	Stopper with releas	se	2	057.3151.071
	Hexagon screw, M5x18 mm (3/16"x: steel, zinc-plated	23/32"),	2	600.0000.646
	Prevailing torque, N steel, zinc-plated	М5,	2	600.0000.459
63/3/83	Support bracket, steel, zinc-plated		2	057.3165.101
	Countersunk head 4x45 mm (5/32"x1 steel, zinc-plated	,	8	600.0000.727
	Bottom guide, left, plastic, gray		1	057.3167.072
	Bottom guide, right plastic, gray	t,	1	057.3167.071
	Countersunk head 3.5x20 mm (5/32"x steel, zinc-plated		1	600.0000.728
	Cover cap, left, plastic, anthracite		1	053.3192.001
رة م	Cover cap, right, plastic, anthracite		1	053.3192.002
	Track cleaner, plas	tic, red	1	040.3142.071
	Running track, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4 '')	1	057.3146.200
	Clip-on panel, aluminum, anodized	2,000 (6' 6 3/4 '')	1	053.3195.200

Hawa Porta 40 H

Running tracks

		mm (inch)	No.
	Running track, aluminum, anodized,	6,000 (19' 8 7/32'')	057.3146.600
	pre-drilled	cut to size	057.3146.990
	Running track, aluminum, stainless steel look, pre-drilled	6,000 (19' 8 7/32'')	057.3146.602
		cut to size	057.3146.992

Panels

		mm (inch)	No.
	Clip-on panel,	6,000 (19' 8 7/32'')	053.3195.600
	aluminum, anodized	cut to size	053.3195.990
	Clip-on panel, aluminum, stainless steel look	6,000 (19' 8 7/32'')	053.3195.602
		cut to size	053.3195.992

Spacer tracks

			mm (inch)	No.
		Spacer track, aluminum, anodized,	2,000 (6' 6 3/4 '')	057.3166.200
		pre-drilled	cut to size	057.3166.990

Panel end component set, 36 mm (1 13/32"), aluminum

	No.
Panel end component set, 36 mm (1 13/32"), aluminum, left	057.3107.071
Panel end component set, 36 mm (1 13/32"), aluminum, right	057.3107.072

Set consisting	of:	057.3107.071	057.3107.072	No.
	Panel end component, left, aluminum, anodized	1		053.3195.901
0 0	Bracker connector, steel, zinc-plated	1	1	057.3051.101
	Screw, M4x2.6 mm (5/32"x 1/8"), steel, zinc-plated	2	2	011.0101.171
	Panel end component, left, aluminum, stainless steel look		1	053.3195.902

Panel end component set, 47 mm (1 27/32"), aluminum

	No.
Panel end component set, 47 mm (1 27/32"), aluminum, left	057.3107.081
Panel end component set, 47 mm (1 27/32"), aluminum, right	057.3107.082

Set consisting	of:	057.3107.081	057.3107.082	No.
	Panel end component, 47 mm (1 27/32"), left, aluminum, anodized	1		057.3107.077
0 0	Bracker connector, steel, zinc-plated	1	1	057.3051.101
	Screw, M4x2.6 mm (5/32"x 1/8"), steel, zinc-plated	2	2	011.0101.171
	Panel end component, 47 mm (1 27/32"), right, aluminum, anodized		1	057.3107.079

Panel end component set, 36 mm (1 13/32"), stainless steel effect

	No.
Panel end component set, 36 mm (1 13/32"), stainless steel look, left	057.3107.075
Panel end component set, 36 mm (1 13/32"), stainless steel look, right	057.3107.076

Set consisting	of:	057.3107.075	057.3107.076	No.
	Panel end component, left, aluminum, stainless steel look	1		053.3195.908
0 0	Bracker connector, steel, zinc-plated	1	1	057.3051.101
(a)	Screw, M4x2.6 mm (5/32"x 1/8"), steel, zinc-plated	2	2	011.0101.171
	Panel end component, right, aluminum, stainless steel look		1	053.3195.909

Panel end component set, 36 mm (1 13/32"), plastic

	No.
End cap set, plastic, anthracite	053.3192.071
End cap set to spacer track 057.3166.200	057.3162.071

Set consisting of:		053.3192.071	057.3162.071	No.
	Cover cap, left, plastic, anthracite	1		053.3192.001
L'a	Cover cap, right, plastic, anthracite	1		053.3192.002
	Cover cap to spacer track, plastic, anthracite		2	057.0187.001

Soft close

	No.
Soft close, up to 40 kg (88 lbs.)	057.3159.073


Set consisting of:		057.3159.073	No.
10	Soft close, up to 40 kg (88 lbs.)	2	057.3156.073
	Release piece soft close	2	057.0182.101
	Thread rolling rounded head screw, M2.5x5 mm (3/32"x3/16"), steel, zinc-plated	2	600.0000.764

Accessories


	No.
Track cleaner, plastic, red	040.3142.071

Hawa Porta 40 H

Calculations of panels



Soft close

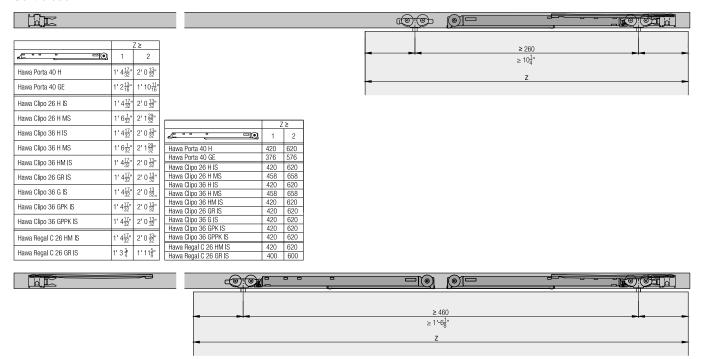

Accessories

- Lock solutions from page 479
- General accessories from page 487

Planning/execution

Further information about the product can be found on www.hawa.com.