








Fitting for 2 top-running wooden doors up to 15 kg (33 lbs.), with screwed on or groove mounted running track. Design Inside.

Product highlights


-  **Flexibility** Flexible, efficient assembly with single or double running tracks for screw fixing, gluing, or with swivel lugs
-  **Productivity** Efficient thanks to tool-less door installation as well as easy, intuitive adjustment

Technical specifications









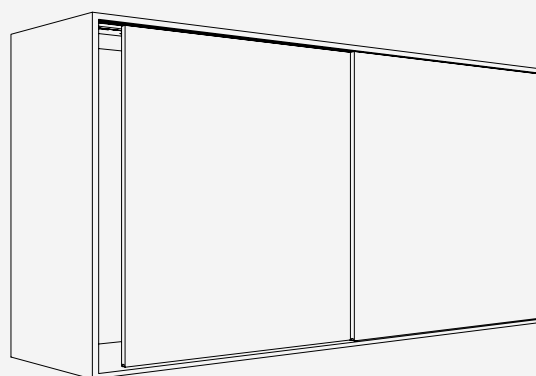-  Max. 15 kg (33 lbs.)
-  Max. 1400 mm (4'7 1/8")
-  Max. 1000 mm (3'3 3/8")
-  16–19 mm (5/8" to 3/4")

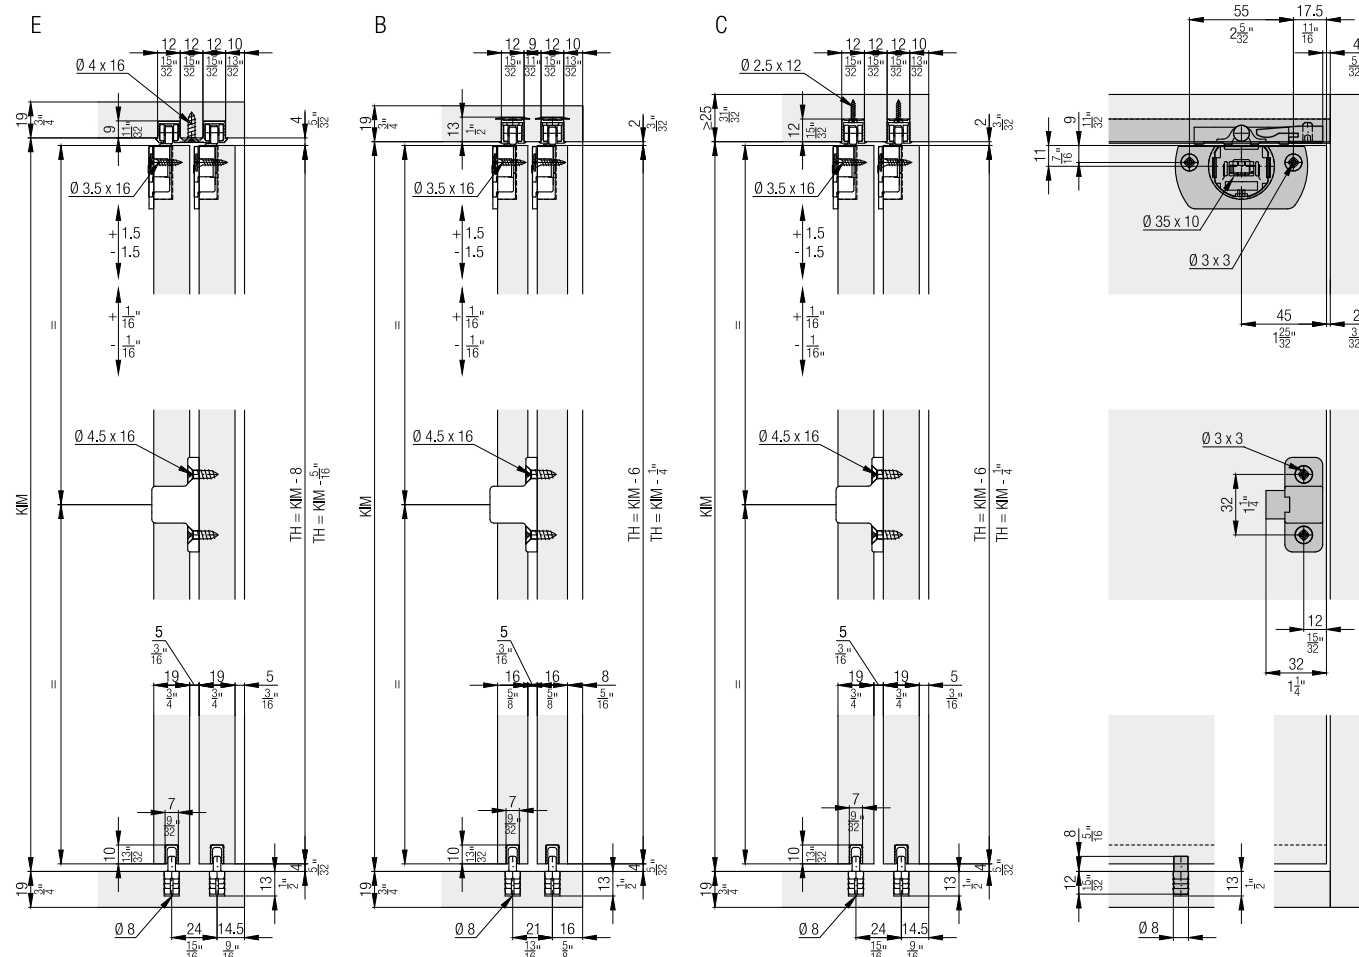









Installation examples








**Set for 2 wooden doors up to 15 kg (33 lbs.),
with height adjustment**

| | | No. | |
|---|---|--------------|--------------|
| Hawa Clipo 15 H IS, for 2 doors | | 053.3115.071 | |
| | | 053.3115.071 | No. |
| Set consisting of: | | | |
|  | Running gear, plastic, anthracite | 4 | 053.3114.071 |
|  | Stopper, plastic, gray | 2 | 053.3080.071 |
|  | Track support clip, plastic, gray | 2 | 053.3087.001 |
|  | Housing, plastic, anthracite | 4 | 053.3112.001 |
|  | Fillister head screw, 3.5x16 mm (5/32"x5/8"), steel, zinc-plated | 8 | 766.6052.100 |
|  | Door follower, plastic, anthracite | 1 | 053.3217.071 |
|  | Flat countersunk head chipboard screw, 4.5x16 mm (3/16"x5/8"), steel, zinc-plated | 2 | 600.0000.478 |
|  | Bottom guide, plastic, anthracite | 2 | 053.3013.001 |


**Set for 2 wooden doors up to 15 kg (33 lbs.), without height
adjustment**

| | | No. | |
|---|---|--------------|--------------|
| Hawa Clipo 15 H IS, without height adjustment, for 2 doors | | 053.3115.072 | |
| | | 053.3115.072 | No. |
| Set consisting of: | | | |
|  | Running gear, without height adjustment, plastic, anthracite | 4 | 053.3318.071 |
|  | Stopper, plastic, gray | 2 | 053.3080.071 |
|  | Track support clip, plastic, gray | 2 | 053.3087.001 |
|  | Housing, plastic, anthracite | 4 | 053.3112.001 |
|  | Fillister head screw, 3.5x16 mm (5/32"x5/8"), steel, zinc-plated | 8 | 766.6052.100 |
|  | Door follower, plastic, anthracite | 1 | 053.3217.071 |
|  | Flat countersunk head chipboard screw, 4.5x16 mm (3/16"x5/8"), steel, zinc-plated | 2 | 600.0000.478 |
|  | Bottom guide, plastic, anthracite | 2 | 053.3013.001 |


Running tracks

| | | mm (inch) | No. |
|--|---|-------------------------|--------------|
|  | A: Single running track, for press fitting or glueing, aluminum | 2,500 (8' 2 7/16") | 053.3007.250 |
| | | 3,500 (11' 5 25/32") | 053.3007.350 |
| | | 6,000 (19' 8 7/32") | 053.3007.600 |
|  | B: Single running track, with swivel lug, notched on both sides, aluminum (not for hard wood/MDF) | 2,500 (8' 2 7/16") | 053.3008.250 |
| | | 3,500 (11' 5 25/32") | 053.3008.350 |
| | B: Single running track, with swivel lug, aluminum (not for hard wood/MDF) | 6,000 (19' 8 7/32") | 053.3008.600 |
|  | C: Single running track, notched on both sides, aluminum, pre-drilled | 2,500 (8' 2 7/16") | 053.3009.250 |
| | | 3,500 (11' 5 25/32") | 053.3009.350 |
| | C: Single running track, aluminum, pre-drilled | 6,000 (19' 8 7/32") | 053.3009.600 |
|  | D: Single running track, aluminum, anodized, pre-drilled | 2,500 (8' 2 7/16") | 053.3035.250 |
| | | 3,500 (11' 5 25/32") | 053.3035.350 |
| | | 6,000 (19' 8 7/32") | 053.3035.600 |
|  | E: Double running track, aluminum, pre-drilled, only for 19 mm (3/4") doors | 2,500 (8' 2 7/16") | 053.3315.250 |
| | E: Double running track, aluminum, pre-drilled, only for 19 mm (3/4") doors | 3,500 (11' 5 25/32") | 053.3315.350 |
| | | 6,000 (19' 8 7/32") | 053.3315.600 |



Guide tracks

| | | mm (inch) | No. |
|--|---|-------------------------|--------------|
|  | Guide track, groove width 7 mm (9/32"), plastic, anthracite | 2,500 (8' 2 7/16") | 053.3012.250 |
| | | 3,500 (11' 5 25/32") | 053.3012.350 |
| | | 6,000 (19' 8 7/32") | 053.3012.600 |

Guide tracks 4-point guidance




| | | mm (inch) | No. |
|---|---|------------------------|--------------|
|  | Single guide track, for glue fixing, aluminum, anodized | 6,000 (19' 8 7/32") | 053.3296.600 |

Components 4-point guidance



| | | No. |
|---|--|--------------|
|  | Bottom guide Hawa Clipo IS/ Hawa Regal C 16, plastic, anthracite | 040.3124.071 |
|  | Stopper guide track, plastic, grey | 053.5094.071 |

Door centering


| | No. |
|--|--------------|
| Door centering, plastic, anthracite, for 2 doors | 053.3207.071 |

| | 053.3207.071 | No. |
|---|---|----------------|
| Set consisting of: | | |
|  | Housing door centering, plastic, anthracite | 2 053.5014.001 |
|  | Pin door centering, plastic, anthracite | 2 053.0171.001 |
|  | Rubber buffer, plastic, grey | 1 025.0107.001 |


Accessories

| | | No. |
|---|---|--------------|
|  | Housing Hawa Clipo 15, press-fit, plastic, anthracite | 083.3009.001 |
|  | Track cleaner, plastic, red | 040.3142.071 |


Further installation examples

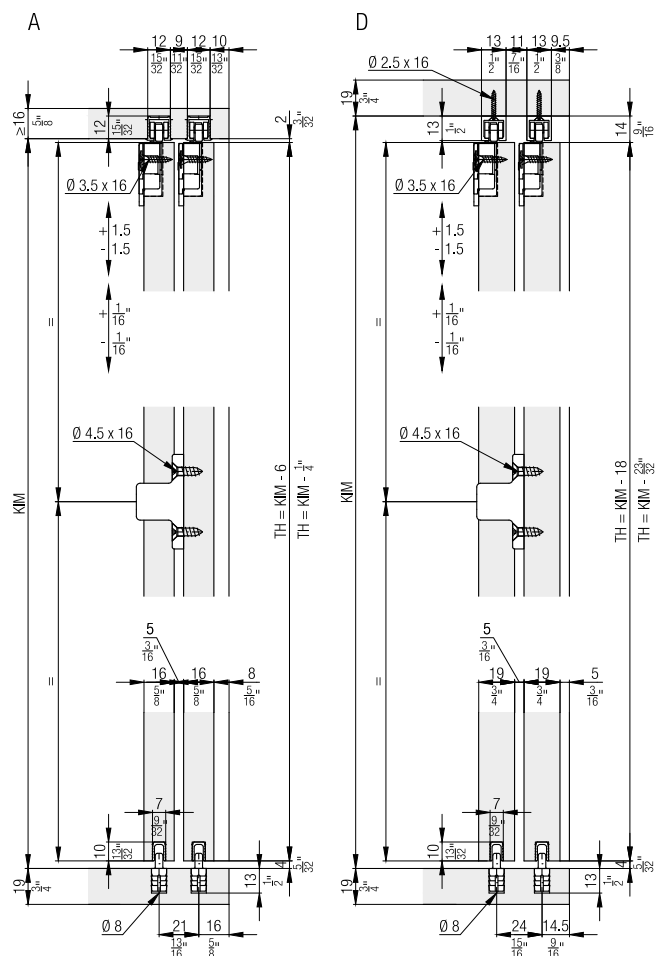


Calculations

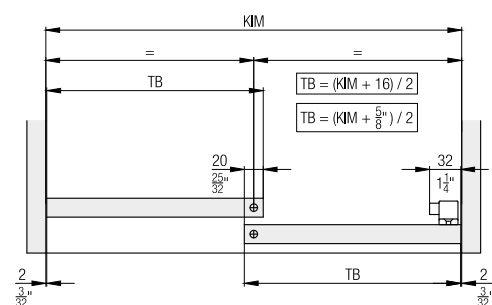


4 point guidance

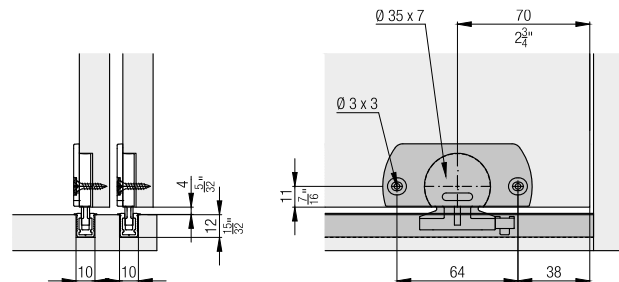


Housing for press-fitting



Door centering

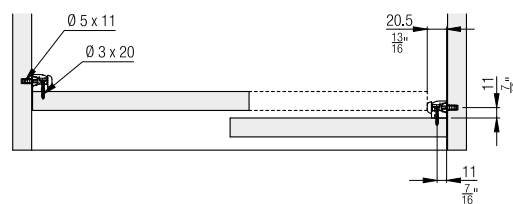

Notched track



Accessories

– Straightening fitting from page 265

Planning/execution

Further information about the product can be found on www.hawa.com.