
Fitting for 2 top-running glass doors up to 16 kg (35 lbs.), with screwed on or groove mounted running track. With soft and self closing mechanism. Design Inslide.

Product highlights


- Comfort Smooth, silent running with Comfort Roller and soft and self closing system for different door weights
- Aesthetics Continuous, filigree glass fixing profile


Technical specifications

\triangle	Max.	16 kg (35 lbs.)
${}_{\downarrow}^{\uparrow}[]$	Max.	1400 mm (4'7 1/8'')
$\stackrel{\leftarrow}{=}$	Max.	1000 mm (3'3 3/8'')
→[]←		6–6.35 mm (1/4'')



Installation examples

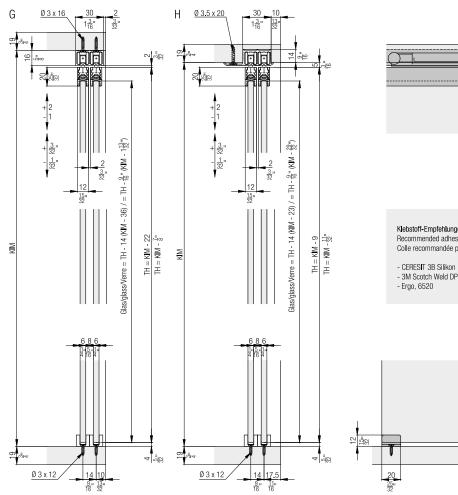

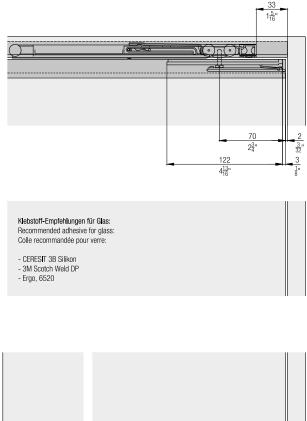

Г

Set for 2 glass doors up to 16 kg (35 lbs.), with height adjustment

	No.		
Hawa Clipo 16 C	053.3264.071		
Set consisting	of:	053.3264.071	No.
660	Running gear Hawa Clipo 16, with support and screw	4	053.3224.071
and a second	Hawa Clipo 16/Hawa Regal 16 C stopper, plastic, gray	2	053.3215.071
Ref. Contraction	Housing, plastic, anthracite	4	053.3252.071
	Door follower, plastic, grey	1	053.3075.071
2J>	Pan head thread forming screw, M3x6 mm (1/8"x1/4"), steel, zinc-plated	1	600.0000.488
P	Bottom guide, plastic, grey	2	053.3253.001
24S	Flat countersunk head chipboard screw, 3x12 mm (1/8"x15/32"), steel, zinc-plated	2	766.5030.112

Suspension and glass retaining profiles

		mm (inch)	No.
		2,500 (8' 2 7/16'')	053.3250.250
	Glass fixing profile, for glue fixing, aluminum, anodized	3,500 (11' 5 25/32'')	053.3250.350
		6,000 (19' 8 7/32'')	053.3250.600

Adhesive

	No.
Glue Ceresit 3B Silicone, 310 ml	098.0027.000

Running tracks

		mm (inch)	No.
111.	G: Double running	2,500 (8' 2 7/16'')	053.3247.250
	track, for screw fixing, aluminum,	3,500 (11' 5 25/32'')	053.3247.350
	anodized	6,000 (19' 8 7/32'')	053.3247.600
11/10		2,500 (8' 2 7/16'')	053.3248.250
	H: Double running track, aluminum, pre-drilled	3,500 (11' 5 25/32'')	053.3248.350
		6,000 (19' 8 7/32'')	053.3248.600

Soft close up to 8/16 kg (17/35 lbs.)

	No.
Soft close Hawa Clipo 16/Hawa Regal C 16, up to 8 kg (17 lbs.)	053.3332.071
Soft close Hawa Clipo 16/Hawa Regal C 16, up to 16 kg (35 lbs.)	053.3332.072

Set consisting	of:	053.3332.071	053.3332.072	No.
63	Damper, up to 8 kg (17 lbs.)	2		053.3330.071
B	Trigger, with stopper	2	2	053.3331.071
El»	Cross recessed pan head screw, 2.2x8 mm (3/32"x5/16"), steel, zinc-plated	2	2	600.0000.482
GA THE A	Damper, up to 16 kg (35 lbs.)		2	053.3330.072

Handles


		No.
	Handle, for glue fixing, 64 mm (2 17/32''), plastic, chrome-plated, matt, 2-piece set	053.3323.971
	Finger-pull-handle, for glue fixing, 30 mm (1 3/16''), aluminum, anodized, 2-piece set	053.3091.982
\bigcirc	Finger-pull-handle, for glue fixing, 30 mm (1 3/16''), aluminum, anodized, 50-piece set	053.3091.983
\bigcirc	Finger-pull-handle, for glue fixing, 40 mm (1 9/16''), aluminum, anodized	053.3158.901



Accessories

	No.
Track cleaner, plastic, red	040.3142.071

Door follower



Soft close

DC

	Z	2					≥ 26		
) 1	2					≥ 10	4	
Hawa Clipo 16 H IS	1' 3 <u>3</u> "	1'115"				-	Ζ		
Hawa Clipo 16 H MS	1' 5 <u>1</u> "	2' 1 1 "		Z	2				
Hawa Clipo 16 H FS	1' 5 <u>1</u> "	2' 1 1 "		1	2				
Hawa Clipo 16 HM IS	1' 3 <u>3</u> "	1' 115"	Hawa Clipo 16 H IS Hawa Clipo 16 H MS	400 438	600 638				
Hawa Clipo 16 GK IS	1' 3 ³ "	1' 115"	Hawa Clipo 16 H FS	438	638				
Hawa Clipo 16 GS IS	1' 3 <u>3</u> "	1' 115"	Hawa Clipo 16 HM IS	400	600				
Hawa Clipo 16 GPK IS	1' 3 <u>3</u> "	1' 115"	Hawa Clipo 16 GK IS Hawa Clipo 16 GS IS	400	600 600				
Hawa Clipo 16 GPPK IS	1 3 <u>3</u> "	1' 115"	Hawa Clipo 16 GPK IS Hawa Clipo 16 GPPK IS	400 400	600 600				

~	
	≥ 460
	≥ 1'-G [*] g"
	Z

Accessories

- Glass recommendations from page 280

Planning/execution Further information about the product can be found on www.hawa.com.

Calculations

