

Fitting for 2 top-running glass doors up to 16 kg 835 lbs.), with screwed on or groove mounted running track. With soft and self closing mechanism. Design Inside.

Product highlights



Comfort

Smooth, silent running with Comfort Roller and soft and self closing system for different door weights



Productivity

Easy installation with tool-less clip-on system and convenient height adjustment

Technical specifications



Max. 16 kg (35 lbs.)



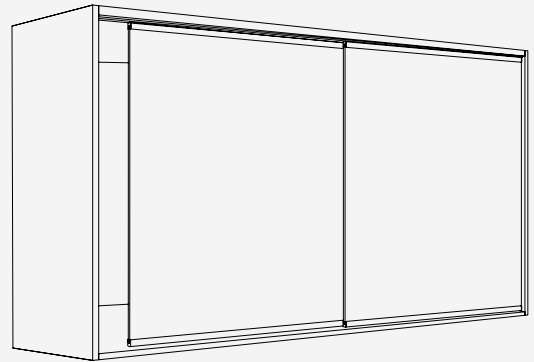
Max. 1400 mm (4'7 1/8")



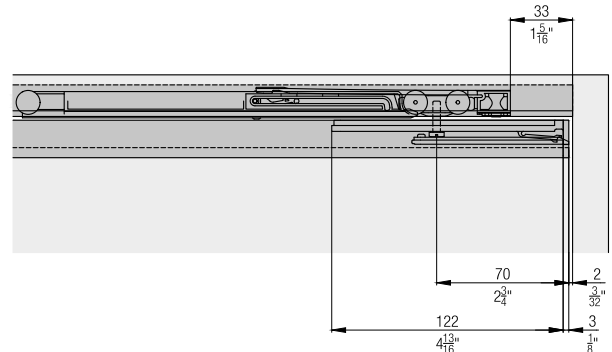
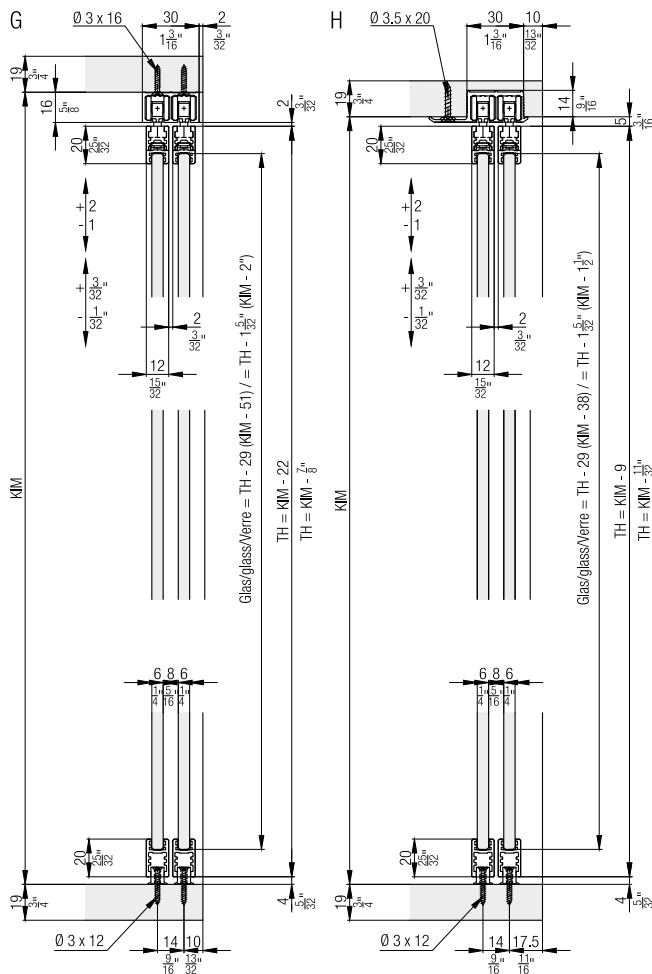
Max. 1000 mm (3'3 3/8")



6-6.35 mm (1/4")



Installation examples











Klebstoff-Empfehlungen für Glas:
Recommended adhesive for glass:
Colle recommandée pour verre:

- CERESIT 3B Silikon
- 3M Scotch Weld DP
- Ergo, 6520


**Set for 2 glass doors up to 16 kg (35 lbs.),
with height adjustment**

	No.
Hawa Clipo 16 GPPK IS, for 2 doors	053.3265.071


Set consisting of:

		053.3265.071	No.
	Running gear Hawa Clipo 16, with support and screw	4	053.3224.071
	Hawa Clipo 16/Hawa Regal 16 C stopper, plastic, gray	2	053.3215.071
	Housing, plastic, anthracite	4	053.3252.071
	Door follower, plastic, grey	1	053.3075.071
	Pan head thread forming screw, M3x6 mm (1/8"x1/4"), steel, zinc-plated	1	600.0000.488
	End cover, plastique, grey	4	053.3255.071
	Bottom guide, plastic grey	2	053.3254.001
	Pan-Head chipboard screw, 3x20 mm (1/8"x25/32"), steel, zinc-plated	2	766.5030.117



Suspension and glass retaining profiles

		mm (inch)	No.
	Glass fixing profile, for glue fixing, aluminum, anodized	2,500 (8' 2 7/16")	053.3250.250
		3,500 (11' 5 25/32")	053.3250.350
		6,000 (19' 8 7/32")	053.3250.600

Adhesive

	No.
	Glue Ceresit 3B Silicone, 310 ml
	098.0027.000





Running tracks

		mm (inch)	No.
	G: Double running track, for screw fixing, aluminum, anodized	2,500 (8' 2 7/16")	053.3247.250
		3,500 (11' 5 25/32")	053.3247.350
		6,000 (19' 8 7/32")	053.3247.600
	H: Double running track, aluminum, pre-drilled	2,500 (8' 2 7/16")	053.3248.250
		3,500 (11' 5 25/32")	053.3248.350
		6,000 (19' 8 7/32")	053.3248.600



Soft close up to 8/16 kg (17/35 lbs.)

	No.
Soft close Hawa Clipo 16/Hawa Regal C 16, up to 8 kg (17 lbs.)	053.3332.071
Soft close Hawa Clipo 16/Hawa Regal C 16, up to 16 kg (35 lbs.)	053.3332.072


Set consisting of:

		053.3332.071	053.3332.072	No.
	Damper, up to 8 kg (17 lbs.)	2		053.3330.071
	Trigger, with stopper	2	2	053.3331.071
	Cross recessed pan head screw, 2.2x8 mm (3/32"x5/16"), steel, zinc-plated	2	2	600.0000.482
	Damper, up to 16 kg (35 lbs.)		2	053.3330.072

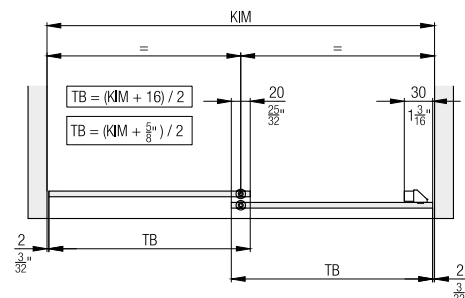
Handles

		No.
	Handle, for glue fixing, 64 mm (2 17/32"), plastic, chrome-plated, matt, 2-piece set	053.3323.971
	Finger-pull-handle, for glue fixing, 30 mm (1 3/16"), aluminum, anodized, 2-piece set	053.3091.982
	Finger-pull-handle, for glue fixing, 30 mm (1 3/16"), aluminum, anodized, 50-piece set	053.3091.983
	Finger-pull-handle, for glue fixing, 40 mm (1 9/16"), aluminum, anodized	053.3158.901


Accessories

	No.
	Track cleaner, plastic, red
	040.3142.071

Calculations



Door follower

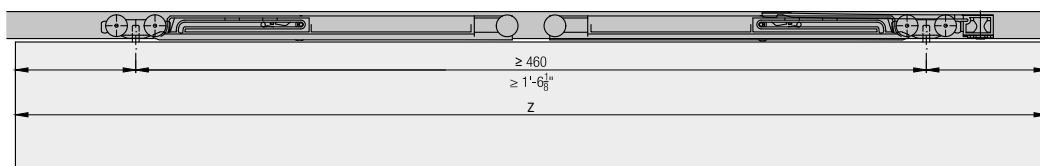
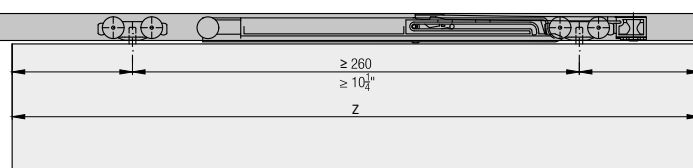


Soft close



	Z ≥	
	1	2
Hawa Clipo 16 H IS	1' 3 $\frac{3}{4}$ "	1' 11 $\frac{5}{8}$ "
Hawa Clipo 16 H MS	1' 5 $\frac{1}{4}$ "	2' 1 $\frac{3}{8}$ "
Hawa Clipo 16 H FS	1' 5 $\frac{1}{4}$ "	2' 1 $\frac{3}{8}$ "
Hawa Clipo 16 HM IS	1' 3 $\frac{3}{4}$ "	1' 11 $\frac{5}{8}$ "
Hawa Clipo 16 GK IS	1' 3 $\frac{3}{4}$ "	1' 11 $\frac{5}{8}$ "
Hawa Clipo 16 GS IS	1' 3 $\frac{3}{4}$ "	1' 11 $\frac{5}{8}$ "
Hawa Clipo 16 GPK IS	1' 3 $\frac{3}{4}$ "	1' 11 $\frac{5}{8}$ "
Hawa Clipo 16 GPPK IS	1' 3 $\frac{3}{4}$ "	1' 11 $\frac{5}{8}$ "

	Z ≥	
	1	2
Hawa Clipo 16 H IS	400	600
Hawa Clipo 16 H MS	438	638
Hawa Clipo 16 H FS	438	638
Hawa Clipo 16 HM IS	400	600
Hawa Clipo 16 GK IS	400	600
Hawa Clipo 16 GS IS	400	600
Hawa Clipo 16 GPK IS	400	600
Hawa Clipo 16 GPPK IS	400	600



Accessories

– Glass recommendations from page 280

Planning/execution

Further information about the product can be found on www.hawa.com.