

Fitting for 2 top-running wooden doors up to 16 kg (35 lbs.), with groove mounted running track. With soft and self closing mechanism. Design Mixslide.

Product highlights



Comfort

Smooth, silent running with Comfort Roller and soft and self closing system for different door weights



Aesthetics

No groove in the base, and no visible guide

Technical specifications



Max. 16 kg (35 lbs.)




Max. 1400 mm (4' 7 1/8")




Max. 1000 mm (3' 3 3/8")



16-19 mm (5/8" to 3/4")

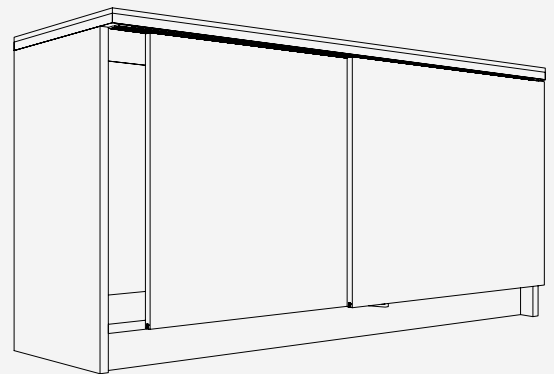





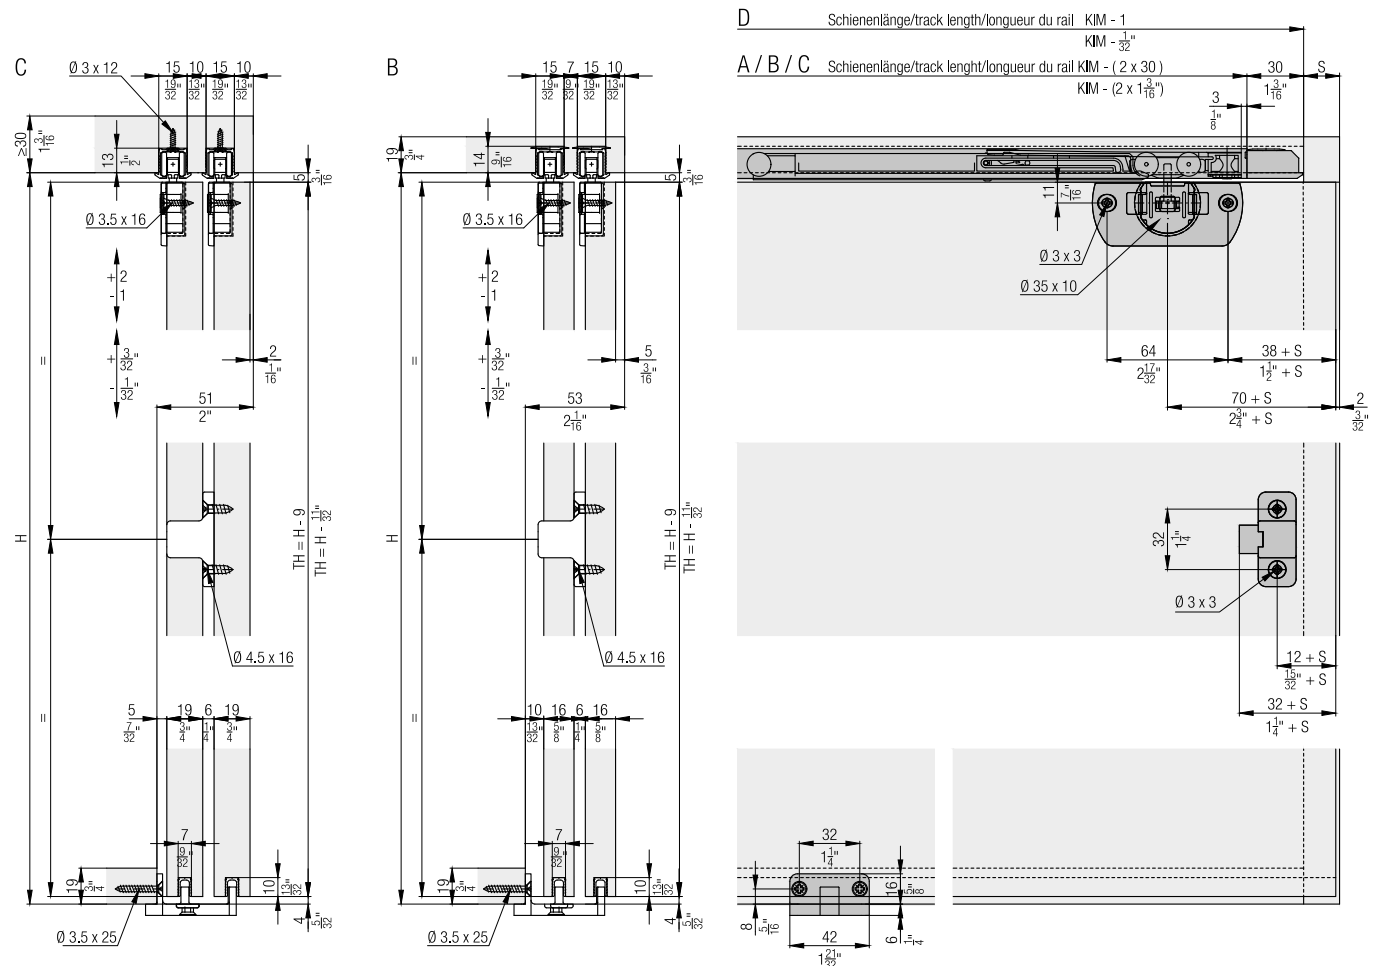Installation examples



**Set for 2 wooden doors up to 16 kg (35 lbs.),
with height adjustment**

	No.
Hawa Clipo 16 H MS, for 2 doors	053.3221.071

Set consisting of:



		053.3221.071	No.
	Hawa Clipo 16 H/Hawa Regal 16 C running gear, plastic, anthracite	4	053.3205.071
	Hawa Clipo 16/Hawa Regal 16 C stopper, plastic, gray	2	053.3215.071
	Housing, plastic, anthracite	4	053.0183.001
	Fillister head screw, 3.5x16 mm (5/32"x5/8"), steel, zinc-plated	8	766.6052.100
	Door follower, plastic, anthracite	1	053.3217.071
	Flat countersunk head chipboard screw, 4.5x16 mm (3/16"x5/8"), steel, zinc-plated	2	600.0000.478
	Bottom guide, plastic, anthracite	1	053.3232.171
	Flat countersunk head chipboard screw, 3.5x25 mm (5/32"x31/32"), steel, zinc-plated	2	766.5035.125

Running tracks

		mm (inch)	No.
	A: Single running track, for glue fixing, aluminum	2,500 (8' 2 7/16")	053.3229.250
		3,500 (11' 5 25/32")	053.3229.350
		6,000 (19' 8 7/32")	053.3229.600
	B: Single running track, with swivel-lug, aluminum (pas pour bois dur/MDF)	2,500 (8' 2 7/16")	053.3227.250
		3,500 (11' 5 25/32")	053.3227.350
		6,000 (19' 8 7/32")	053.3227.600
	C: Single running track, aluminum, pre-drilled	2,500 (8' 2 7/16")	053.3225.250
		3,500 (11' 5 25/32")	053.3225.350
		6,000 (19' 8 7/32")	053.3225.600
	D: Double running track, aluminum, pre-drilled	2,500 (8' 2 7/16")	053.3226.250
		3,500 (11' 5 25/32")	053.3226.350
		6,000 (19' 8 7/32")	053.3226.600


Track end piece set for single running tracks

	No.
Track end piece, for screw fixing, plastic, gray	053.3210.081
Track end piece, with swivel lug, plastic, gray	053.3211.081

		053.3210.081	053.3211.081	No.
	Track-end piece, for screw fixing, plastic, gray	2		053.3210.001
	Track-end piece, with swivel lug, plastic, gray		2	053.3211.071

Set consisting of:

Guide tracks

		mm (inch)	No.
	Guide track, groove width 7 mm (9/32"), plastic, anthracite	2,500 (8' 2 7/16")	053.3012.250
		3,500 (11' 5 25/32")	053.3012.350
		6,000 (19' 8 7/32")	053.3012.600


Soft close up to 8/16 kg (17/35 lbs.)

	No.
Soft close Hawa Clipo 16/Hawa Regal C 16, up to 8 kg (17 lbs.)	053.3332.071
Soft close Hawa Clipo 16/Hawa Regal C 16, up to 16 kg (35 lbs.)	053.3332.072

Set consisting of:

		053.3332.071	053.3332.072	No.
	Damper, up to 8 kg (17 lbs.)	2		053.3330.071
	Trigger, with stopper	2	2	053.3331.071
	Cross recessed pan head screw, 2.2x8 mm (3/32" x 5/16"), steel, zinc-plated	2	2	600.0000.482
	Damper, up to 16 kg (35 lbs.)		2	053.3330.072




Handle profiles

		mm (inch)	No.
	Handle profile, groove for brush seal, for screw fixing, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	055.3140.250
		6,000 (19' 8 7/32")	055.3140.600



Door centering

	No.
Door centering, plastic, anthracite, for 2 doors	053.3207.071


Set consisting of:

		053.3207.071	No.
	Housing door centering, plastic, anthracite	2	053.5014.001
	Pin door centering, plastic, anthracite	2	053.0171.001
	Rubber buffer, plastic, grey	1	025.0107.001


Accessories

		No.
	Housing Hawa Clipo 16, press-fit, plastic, anthracite	083.3009.002
	Track cleaner, plastic, red	040.3142.071


Further installation examples

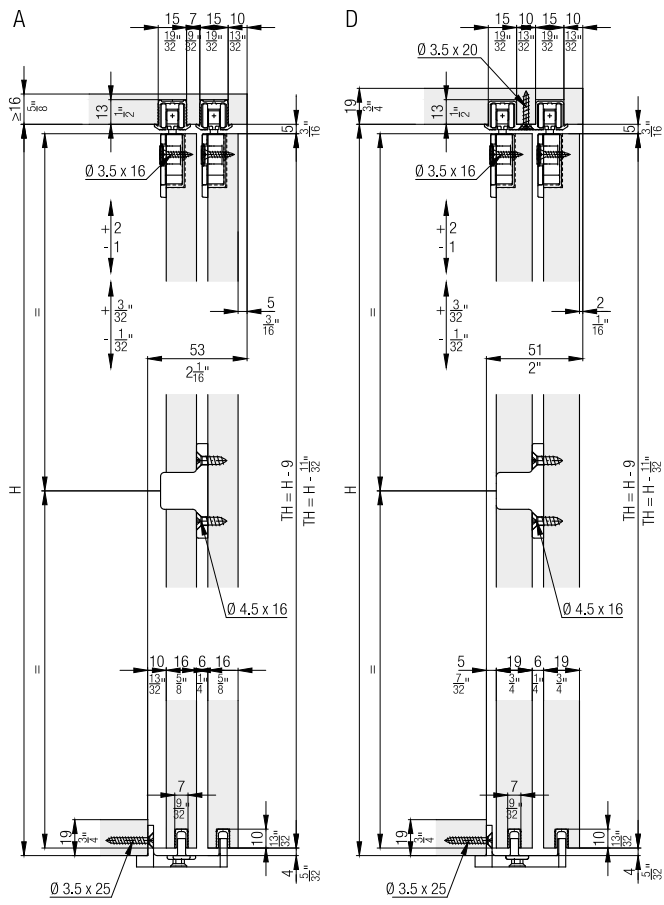


Calculations

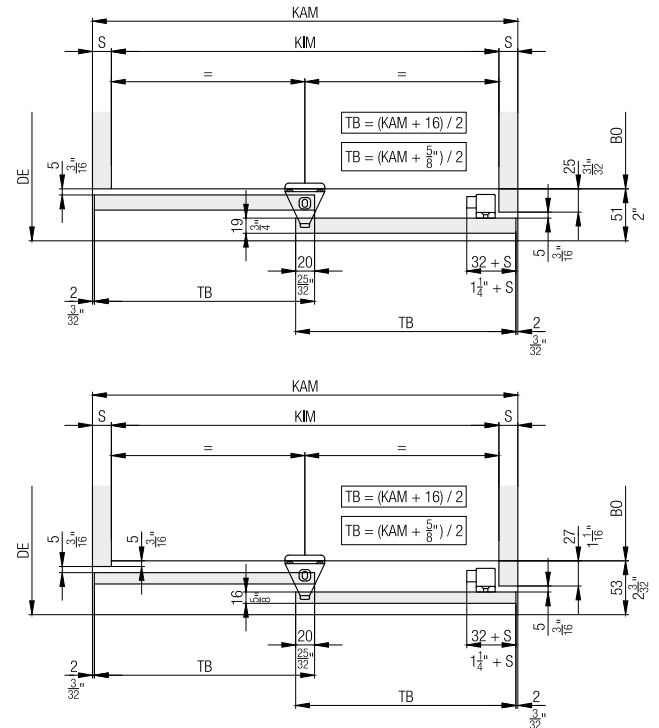


Housing for press-fitting



Door centering

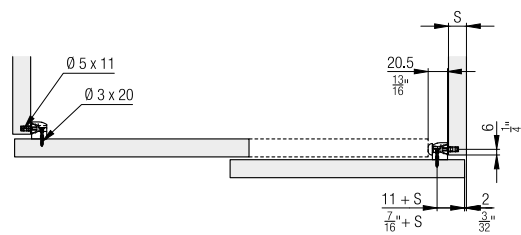

Handle profiles





Soft close



	Z ≥	
	1	2
Hawa Clipo 16 H IS	1' 3 $\frac{3}{4}$ "	1' 11 $\frac{5}{8}$ "
Hawa Clipo 16 H MS	1' 5 $\frac{1}{4}$ "	2' 1 $\frac{3}{8}$ "
Hawa Clipo 16 H FS	1' 5 $\frac{1}{4}$ "	2' 1 $\frac{3}{8}$ "
Hawa Clipo 16 HM IS	1' 3 $\frac{3}{4}$ "	1' 11 $\frac{5}{8}$ "
Hawa Clipo 16 GK IS	1' 3 $\frac{3}{4}$ "	1' 11 $\frac{5}{8}$ "
Hawa Clipo 16 GS IS	1' 3 $\frac{3}{4}$ "	1' 11 $\frac{5}{8}$ "
Hawa Clipo 16 GPK IS	1' 3 $\frac{3}{4}$ "	1' 11 $\frac{5}{8}$ "
Hawa Clipo 16 GPPK IS	1' 3 $\frac{3}{4}$ "	1' 11 $\frac{5}{8}$ "

	Z ≥	
	1	2
Hawa Clipo 16 H IS	400	600
Hawa Clipo 16 H MS	438	638
Hawa Clipo 16 H FS	438	638
Hawa Clipo 16 HM IS	400	600
Hawa Clipo 16 GK IS	400	600
Hawa Clipo 16 GS IS	400	600
Hawa Clipo 16 GPK IS	400	600
Hawa Clipo 16 GPPK IS	400	600

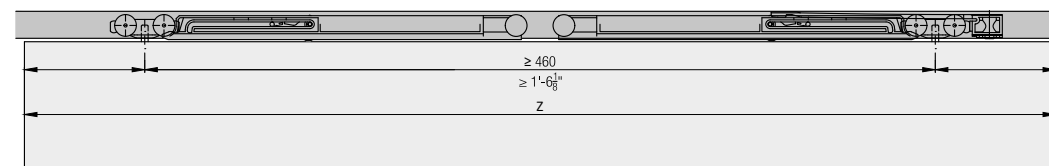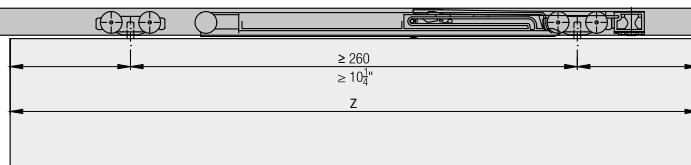

Accessories

– Straightening fitting from page 265

Planning/execution

Further information about the product can be found on www.hawa.com.