

Fitting for 2-3 top-running wooden doors up to 26 kg (57 lbs.), with groove mounted running track. With soft and self closing mechanism. Design Mixslide.

Product highlights



Comfort

Quiet, smooth running and soft and self closing system for different door weights



Productivity

Easy installation with tool-less clip-on system
and convenient height adjustment

Technical specifications



Max. 26 kg (57 lbs.)




Max. 2200 mm (7'2 5/8")





Max. 1000 mm (3'3 3/8")



19 mm (3/4")

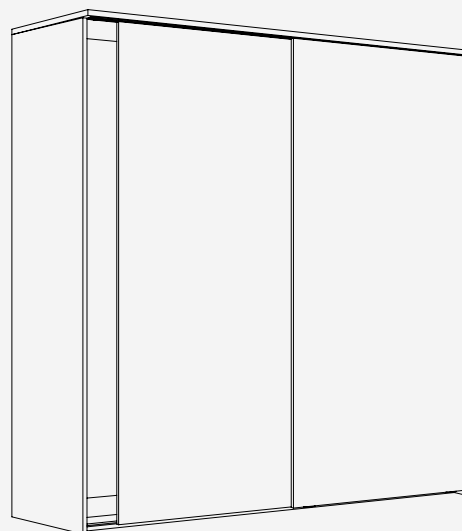



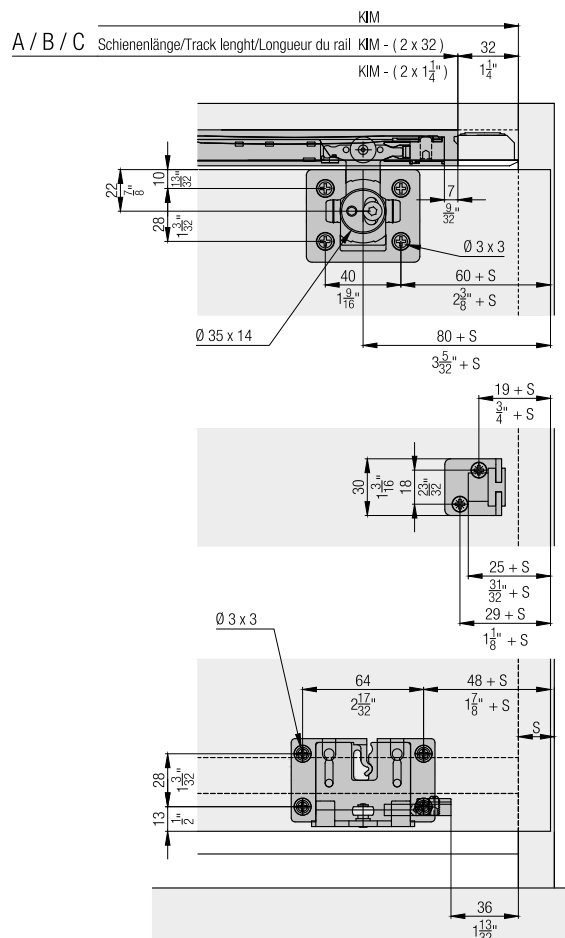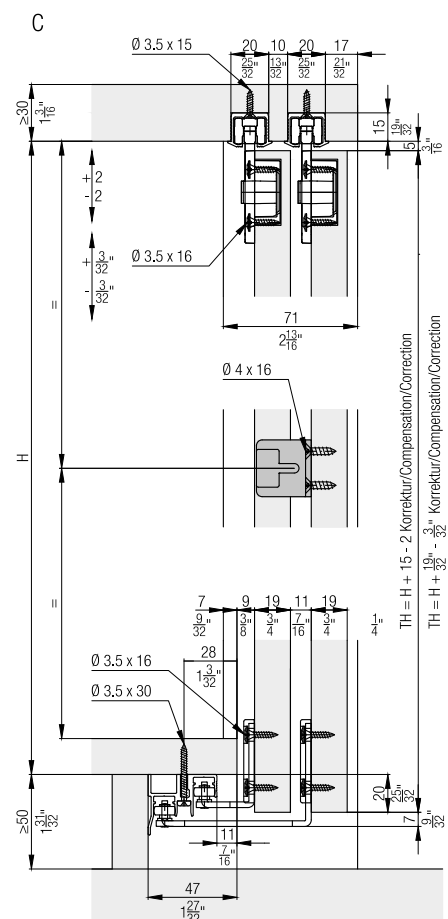

Installation examples



**Set for 2 wooden doors up to 26 kg (57 lbs.),
with height adjustment**

	No.
Hawa Clipo 26 H MS, for 2 doors	053.3356.071




		053.3356.071	No.
Set consisting of:			
	Running gear, left	2	053.3349.071
	Running gear, right	2	053.3348.071
	Stopper, plastic, gray	4	057.3148.071
	Housing, plastic	4	053.0332.001
	Fillister head screw, 3.5x16 mm (5/32"x5/8"), steel, zinc-plated	32	766.6052.100
	Follower Hawa Combino/Hawa Clipo, plastic	1	055.3123.071
	Adapter to follower steel, zinc-plated	1	055.0213.101
	Flat countersunk head chipboard screw 4x16 mm (5/32"x5/8"), steel, zinc-plated	2	600.0000.253
	Guide bracket, interior door, steel, zinc-plated	2	055.3107.171
	Guide bracket, exterior door, 19 mm (3/4"), steel, zinc-plated	2	055.3109.171
	Guide bracket housing, plastic, anthracite	4	053.3064.001
	Stopper guide, plastic, gray	4	040.3079.074

**Set for 3 wooden doors up to 26 kg (57 lbs.),
with height adjustment**

	No.
Hawa Clipo 26 H MS, for 3 doors	053.3356.072




		053.3356.072	No.
Set consisting of:			
	Running gear, left	3	053.3349.071
	Running gear, right	3	053.3348.071
	Stopper, plastic, gray	4	057.3148.071
	Housing, plastic	6	053.0332.001
	Fillister head screw, 3.5x16 mm (5/32"x5/8"), steel, zinc-plated	48	766.6052.100
	Buffer, with adhesive	2	061.3083.001
	Guide bracket, interior door, steel, zinc-plated	4	055.3107.171
	Guide bracket, exterior door, 19 mm (3/4"), steel, zinc-plated	2	055.3109.171
	Guide bracket housing, plastic, anthracite	6	053.3064.001
	Door follower, steel, zinc-plated, with 3 doors	2	055.3126.171
	Thread-cutting rounded head screw, M4x8 mm (5/32"x5/16"), steel, zinc-plated	2	600.0000.328
	Stopper guide, plastic, gray	4	040.3079.074

Running tracks


		mm (inch)	No.
	A: Single running track, for glue fixing, aluminum, anodized	2,500 (8' 2 7/16")	053.3324.250
		3,500 (11' 5 25/32")	053.3324.350
		6,000 (19' 8 7/32")	053.3324.600
	B: Single running track, swivel lug, aluminum, anodized (not for hard wood/ MDF)	2,500 (8' 2 7/16")	053.3327.250
		3,500 (11' 5 25/32")	053.3327.350
		6,000 (19' 8 7/32")	053.3327.600
	C: Single running track, for screw fixing, aluminum, anodized	2,500 (8' 2 7/16")	053.3325.250
		3,500 (11' 5 25/32")	053.3325.350
		6,000 (19' 8 7/32")	053.3325.600

Track end piece set for single running tracks

	No.
Track-end section, for screw fixing, plastic, gray, 2-piece set	053.3354.071
Track-end section, swivel lug, plastic, gray, 2-piece set	053.3355.051

		053.3354.071	053.3355.051	No.
Set consisting of:				
	Track-end piece, for screw fixing, plastic	2		053.0334.001
	Chipboard screw, 4x12 mm (5/32"x15/32"), steel, zinc-plated	2		600.0000.704
	Track-end piece, with swivel lug, plastic		2	053.3351.071





Guide tracks

		mm (inch)	No.
	Double guide track, for screw fixing, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	056.3072.250
		3,500 (11' 5 25/32")	056.3072.350
		6,000 (19' 8 7/32")	056.3072.600


Soft close up to 15/26 kg (33/57 lbs.)

	No.
Soft close, up to 15 kg (33 lbs.)	057.3159.071
Soft close, up to 26 kg (57 lbs.)	057.3159.072


Set consisting of:

		057.3159.071	057.3159.072	No.
	Soft close, up to 15 kg (33 lbs.)	2		057.3156.071
	Release piece soft close	2	2	057.0182.101
	Thread rolling rounded head screw, M2.5x5 mm (3/32"x3/16"), steel, zinc-plated	2	2	600.0000.764
	Soft close, up to 26 kg (57 lbs.)		2	057.3156.072


Handle profiles

		mm (inch)	No.
	Handle profile, groove for brush seal, for screw fixing, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	055.3140.250
		6,000 (19' 8 7/32")	055.3140.600


Accessories

	No.
	040.3142.071


Further installation examples

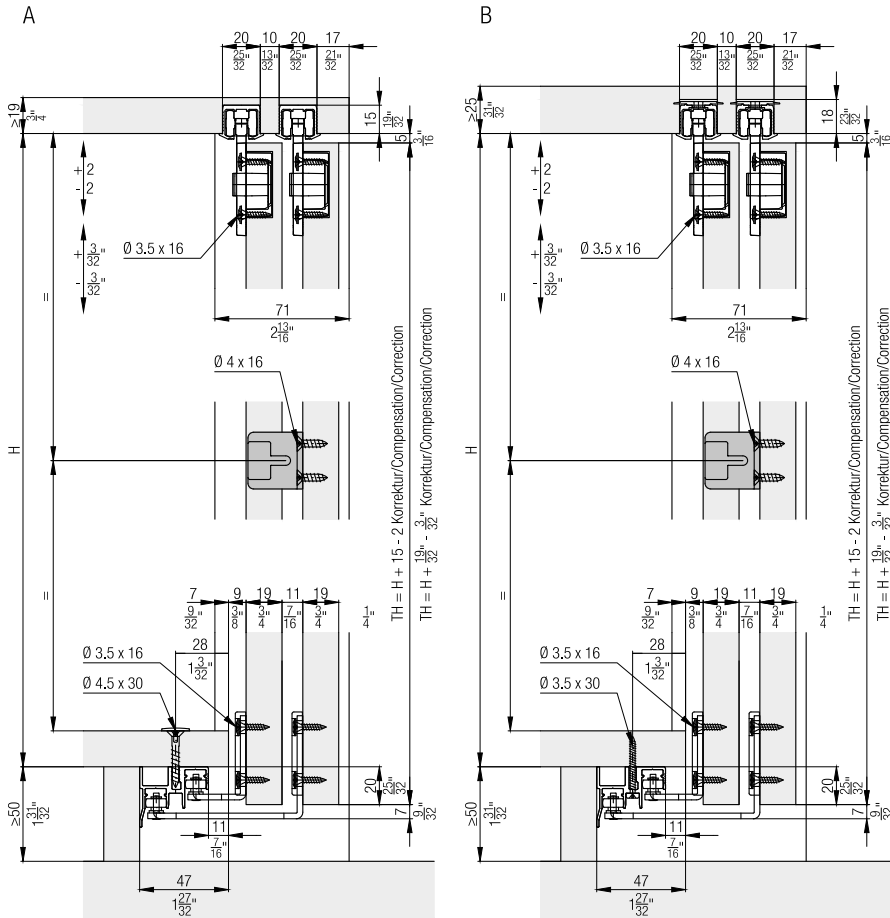


Handle profiles



Calculations

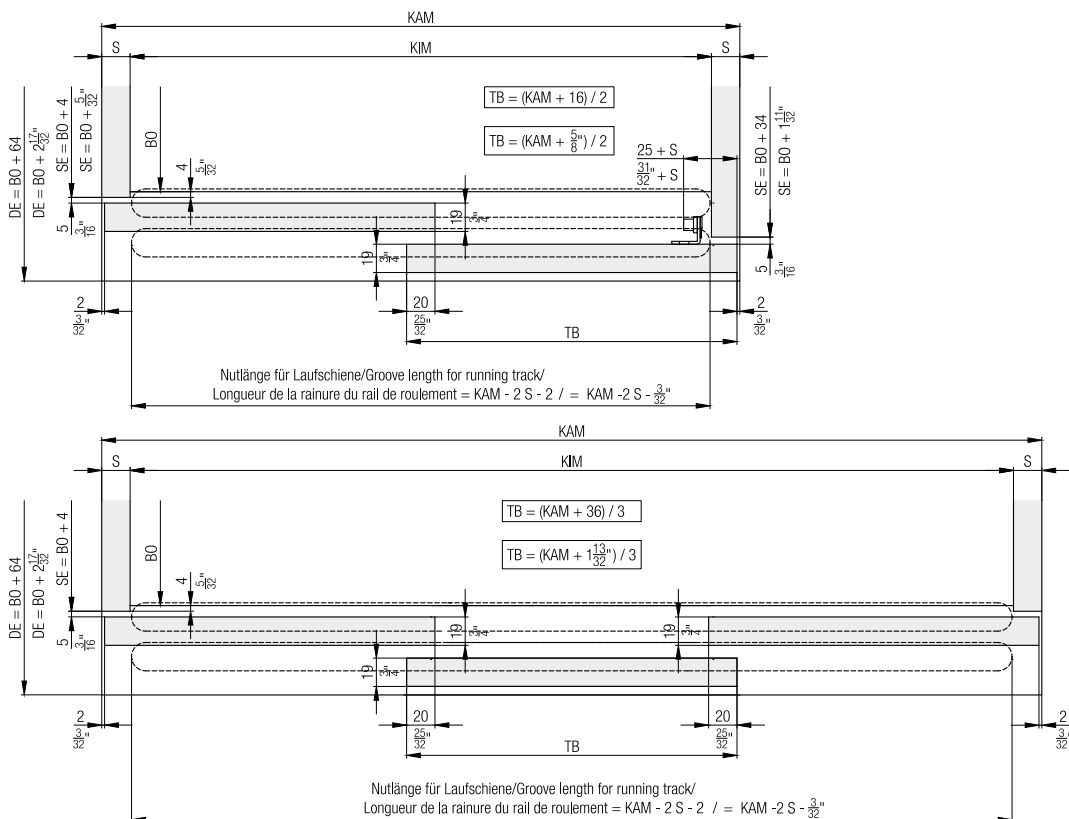

Soft close

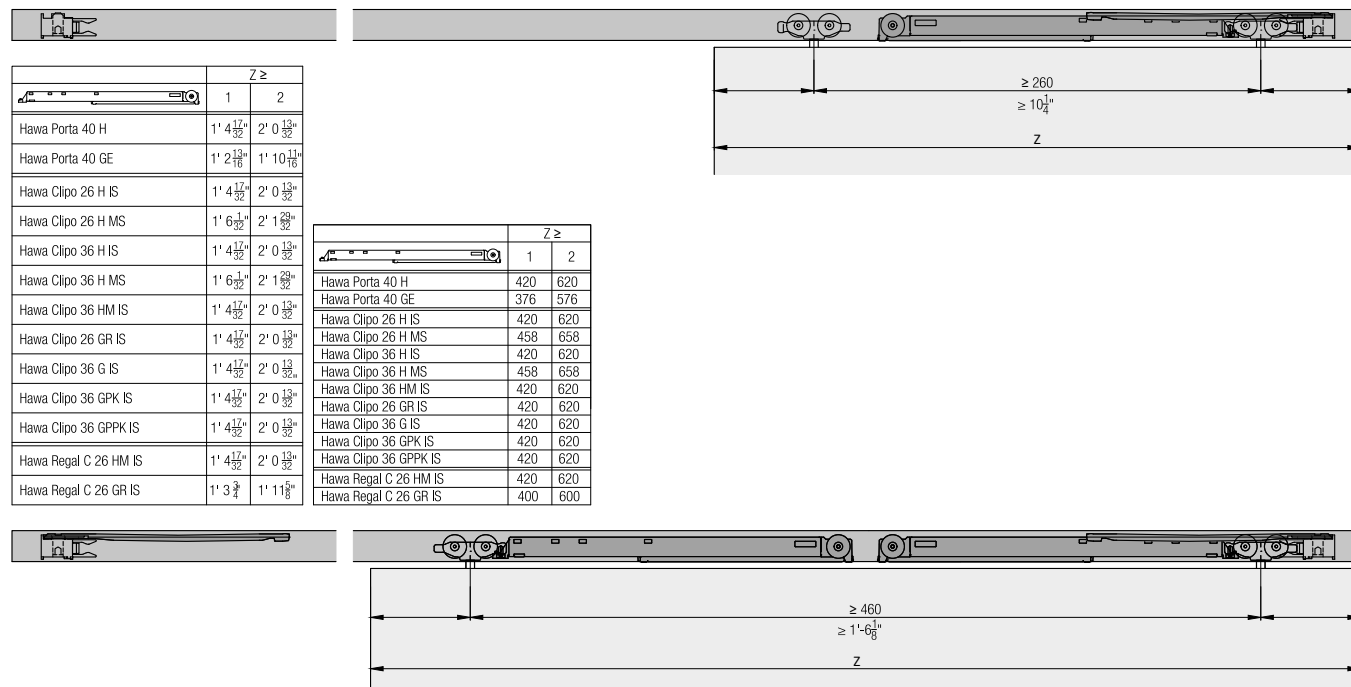

Accessories

– Straightening fitting from page 265

Planning/execution

Further information about the product can be found on www.hawa.com.