

**Fitting for 1-2 top-running glass doors up to 36 kg (79 lbs.), with screwed on or groove mounted running track. With soft and self closing mechanism. Design Inside.**

## Product highlights




## Comfort

Quiet, smooth running and soft and self closing system for different door weights



## Productivity

Easy installation with tool-less clip-on system  
and convenient height adjustment

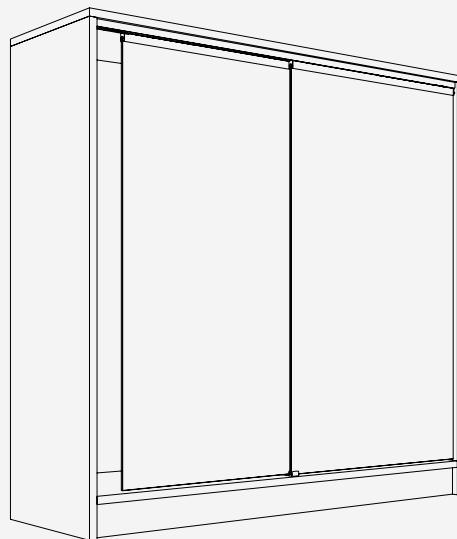

## Technical specifications



Max. 36 kg (79 lbs.)



Max. 2000 mm (6'6 3/4")








Max. 1000 mm (3'3 3/8")



6–8 mm (1/4" to 5/16")


## Installation examples

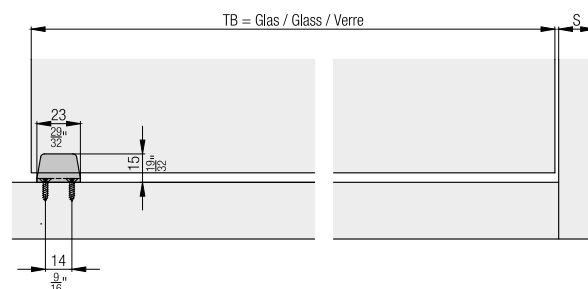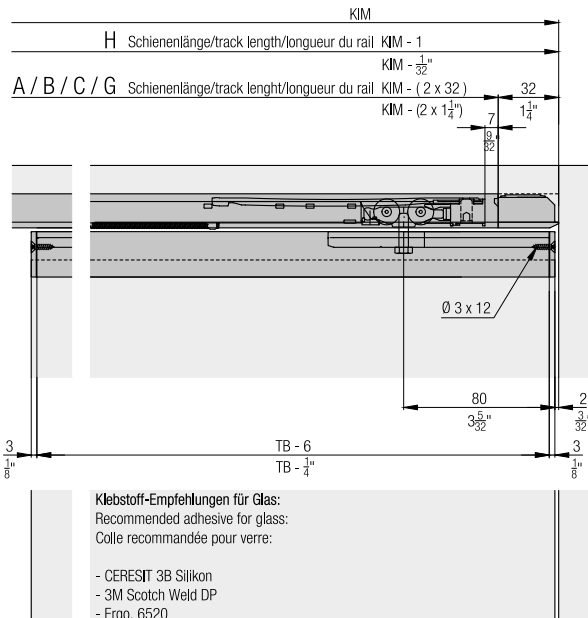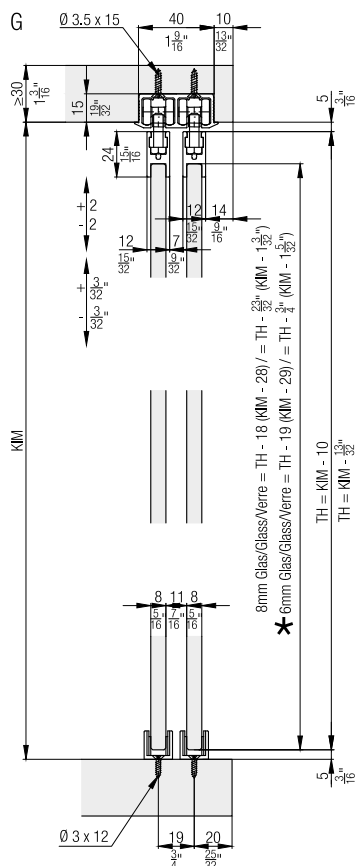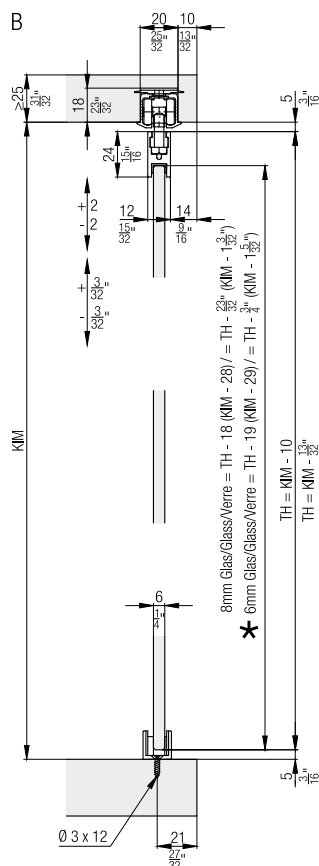


### Set for 1 glass door up to 36 kg (79 lbs.), with height adjustment

		No.	
Hawa Clipo 36 GPK, for 1 door		053.3361.071	
		053.3361.071	No.
<b>Set consisting of:</b>			
	Running gear	2	053.3344.071
	Flat countersunk head chipboard screw, 3x12 mm (1/8" x 15/32"), steel, zinc-plated, black	2	600.0000.703
	Stopper, plastic, gray	2	057.3148.071
	Centring help, for 6 mm (1/4") glass	2	053.3139.001
	Bottom guide glass, playfree, chrome-plated, matt	1	053.3097.901
	Slider bottom guide, plastic, grey, 4-piece set	1	053.0146.001
	Flat countersunk head chipboard screw, 3x12 mm (1/8" x 15/32"), steel, zinc-plated	2	766.5030.112






### Suspension and glass retaining profiles

		mm (inch)	No.
	Glass fixing profile, aluminum, anodized	2,500 (8' 2 7/16")	053.3072.250
		3,500 (11' 5 25/32")	053.3072.350
		6,000 (19' 8 7/32")	053.3072.600

### Adhesive

		No.
	Glue Ceresit 3B Silicone, 310 ml	098.0027.000




### Running tracks

		mm (inch)	No.
	A: Single running track, for glue fixing, aluminum, anodized	2,500 (8' 2 7/16")	053.3324.250
		3,500 (11' 5 25/32")	053.3324.350
		6,000 (19' 8 7/32")	053.3324.600
	B: Single running track, swivel lug, aluminum, anodized (not for hard wood/ MDF)	2,500 (8' 2 7/16")	053.3327.250
		3,500 (11' 5 25/32")	053.3327.350
		6,000 (19' 8 7/32")	053.3327.600
	C: Single running track, for screw fixing, aluminum, anodized	2,500 (8' 2 7/16")	053.3325.250
		3,500 (11' 5 25/32")	053.3325.350
		6,000 (19' 8 7/32")	053.3325.600
	G: Double running track, for screw fixing, aluminum, anodized	2,500 (8' 2 7/16")	053.3342.250
		3,500 (11' 5 25/32")	053.3342.350
		6,000 (19' 8 7/32")	053.3342.600
	H: Single running track, for screw fixing, aluminum, anodized	2,500 (8' 2 7/16")	053.3326.250
		3,500 (11' 5 25/32")	053.3326.350
		6,000 (19' 8 7/32")	053.3326.600

**Track end piece set for single running tracks**

	No.
Track-end section, for screw fixing, plastic, gray, 2-piece set	053.3354.071
Track-end section, swivel lug, plastic, gray, 2-piece set	053.3355.051




**Set consisting of:**

		053.3354.071	053.3355.051	No.
	Track-end piece, for screw fixing, plastic	2		053.0334.001
	Chipboard screw, 4x12 mm (5/32" x 15/32"), steel, zinc-plated	2		600.0000.704
	Track-end piece, with swivel lug, plastic		2	053.3351.071

**Track end piece set for double running tracks**

	No.
Track-end section, double track, swivel lug, plastic, gray, 2-piece set	053.3362.051
Track-end section, double track, plastic, grey, 2-piece set	053.3365.071






**Set consisting of:**

		053.3362.051	053.3365.071	No.
	Track-end piece, double running track, with swivel lug, plastic	2		053.3352.071
	Track-end piece, Double running track, for screw fixing, plastic		2	053.0335.001
	Chipboard screw, 4x12 mm (5/32" x 15/32"), steel, zinc-plated		4	600.0000.704




**Soft close up to 15/26/36 kg (33/57/79 lbs.)**

	No.
Soft close, up to 15 kg (33 lbs.)	057.3159.071
Soft close, up to 26 kg (57 lbs.)	057.3159.072
Soft close, up to 40 kg (88 lbs.)	057.3159.073


**Set consisting of:**

		057.3159.071	057.3159.072	057.3159.073	No.
	Soft close, up to 15 kg (33 lbs.)	2			057.3156.071
	Release piece soft close	2	2	2	057.0182.101
	Thread rolling rounded head screw, M2.5x5 mm (3/32" x 3/16"), steel, zinc-plated	2	2	2	600.0000.764
	Soft close, up to 26 kg (57 lbs.)		2		057.3156.072
	Soft close, up to 40 kg (88 lbs.)			2	057.3156.073


**Handles**

		No.
	Handle, for glue fixing, 64 mm (2 17/32"), plastic, chrome-plated, matt, 2-piece set	053.3323.971
	Finger-pull-handle, for glue fixing, 30 mm (1 3/16"), aluminum, anodized, 2-piece set	053.3091.982
	Finger-pull-handle, for glue fixing, 30 mm (1 3/16"), aluminum, anodized, 50-piece set	053.3091.983
	Finger-pull-handle, for glue fixing, 40 mm (1 9/16"), aluminum, anodized	053.3158.901

**Accessories**


		No.
	Track cleaner, plastic, red	040.3142.071

## Further installation examples

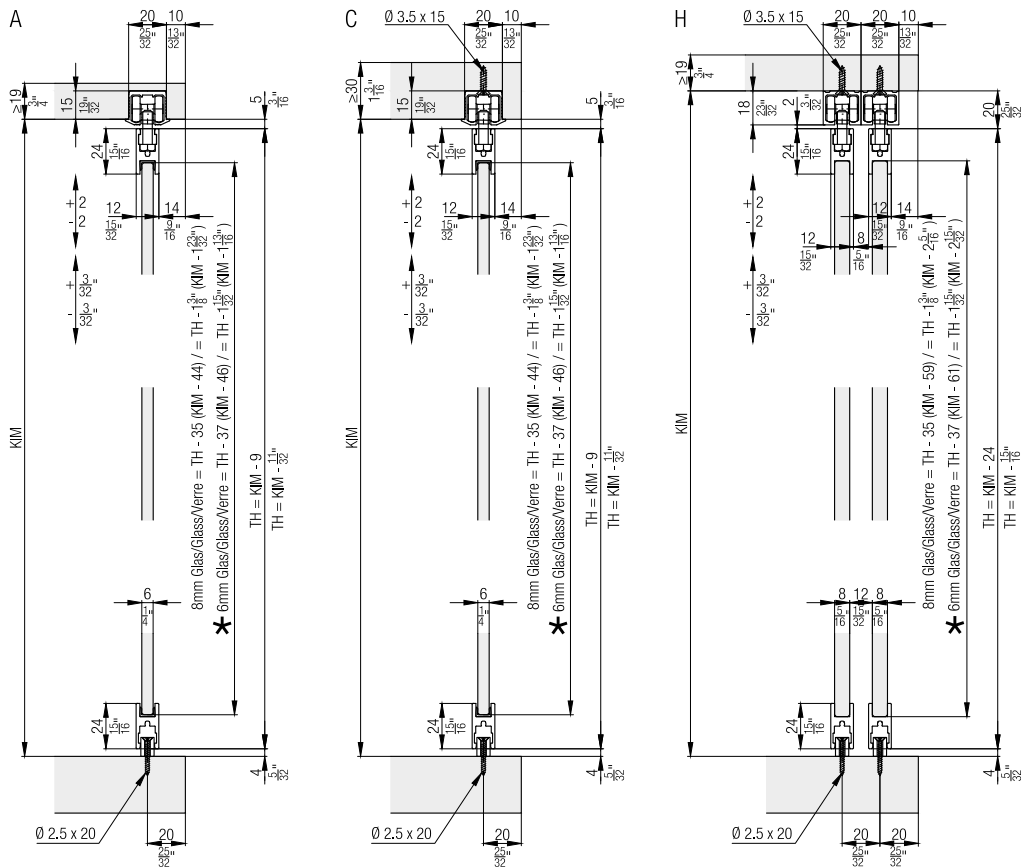


\* Zentrierhilfe für 6mm Glas  
Centering help for 6mm glass  
Aide de centrage pour verre 6mm

## Calculations

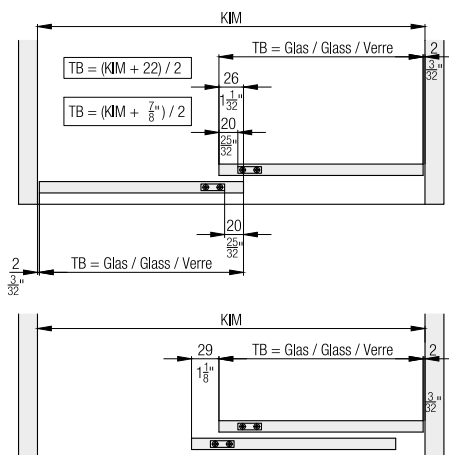


## Locking systems

Details from page 272 onwards




## Soft close

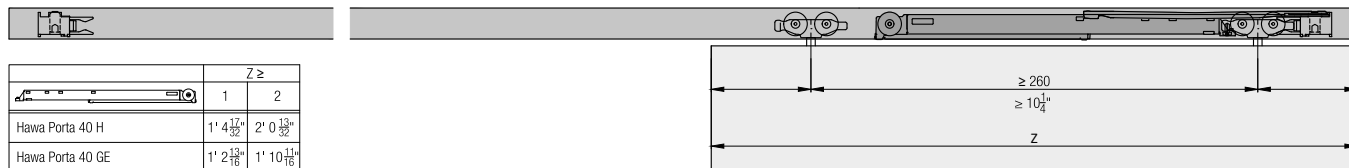

	Z ≥	
	1	2
Hawa Porta 40 H	1' 4 <sup>17</sup> / <sub>32</sub> "	2' 0 <sup>13</sup> / <sub>32</sub> "
Hawa Porta 40 GE	1' 2 <sup>13</sup> / <sub>16</sub> "	1' 10 <sup>1</sup> / <sub>16</sub> "
Hawa Clipo 26 H IS	1' 4 <sup>17</sup> / <sub>32</sub> "	2' 0 <sup>13</sup> / <sub>32</sub> "
Hawa Clipo 26 H MS	1' 6 <sup>1</sup> / <sub>32</sub> "	2' 1 <sup>29</sup> / <sub>32</sub> "
Hawa Clipo 36 H IS	1' 4 <sup>17</sup> / <sub>32</sub> "	2' 0 <sup>13</sup> / <sub>32</sub> "
Hawa Clipo 36 H MS	1' 6 <sup>1</sup> / <sub>32</sub> "	2' 1 <sup>29</sup> / <sub>32</sub> "
Hawa Clipo 36 HM IS	1' 4 <sup>17</sup> / <sub>32</sub> "	2' 0 <sup>13</sup> / <sub>32</sub> "
Hawa Clipo 26 GR IS	1' 4 <sup>17</sup> / <sub>32</sub> "	2' 0 <sup>13</sup> / <sub>32</sub> "
Hawa Clipo 36 G IS	1' 4 <sup>17</sup> / <sub>32</sub> "	2' 0 <sup>13</sup> / <sub>32</sub> "
Hawa Clipo 36 GPK IS	1' 4 <sup>17</sup> / <sub>32</sub> "	2' 0 <sup>13</sup> / <sub>32</sub> "
Hawa Clipo 36 GPPK IS	1' 4 <sup>17</sup> / <sub>32</sub> "	2' 0 <sup>13</sup> / <sub>32</sub> "
Hawa Regal C 26 HM IS	1' 4 <sup>17</sup> / <sub>32</sub> "	2' 0 <sup>13</sup> / <sub>32</sub> "
Hawa Regal C 26 GR IS	1' 3 <sup>9</sup> / <sub>4</sub> "	1' 11 <sup>5</sup> / <sub>8</sub> "

	Z ≥	
	1	2
Hawa Porta 40 H	420	620
Hawa Porta 40 GE	376	576
Hawa Clipo 26 H IS	420	620
Hawa Clipo 26 H MS	458	658
Hawa Clipo 36 H IS	420	620
Hawa Clipo 36 H MS	458	658
Hawa Clipo 36 HM IS	420	620
Hawa Clipo 26 GR IS	420	620
Hawa Clipo 36 G IS	420	620
Hawa Clipo 36 GPK IS	420	620
Hawa Clipo 36 GPPK IS	420	620
Hawa Regal C 26 HM IS	420	620
Hawa Regal C 26 GR IS	400	600

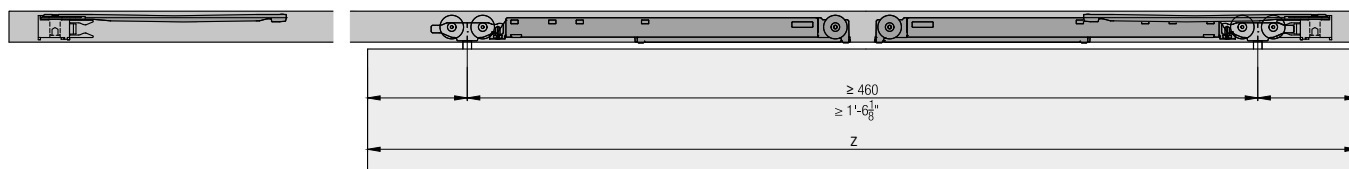

### Accessories

- Locking systems from page 272
- Glass recommendations from page 280

### Planning/execution

Further information about the product can be found on [www.hawa.com](http://www.hawa.com).