

**Fitting for 1-2 top-running glass doors up to 36 kg (79 lbs.), with screwed on or groove mounted running track. With soft and self closing mechanism. Design Inside.**

## Product highlights




## Comfort

Quiet, smooth running and soft and self closing system for different door weights



## Productivity

No groove in the base and invisible technology

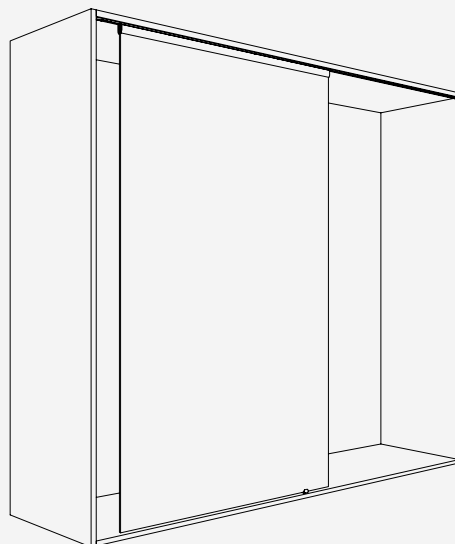

## Technical specifications



Max. 36 kg (79 lbs.)



Max. 2000 mm (6'6 3/4")





Max. 1000 mm (3'3 3/8")



6–8 mm (1/4" to 5/16")

## Installation examples

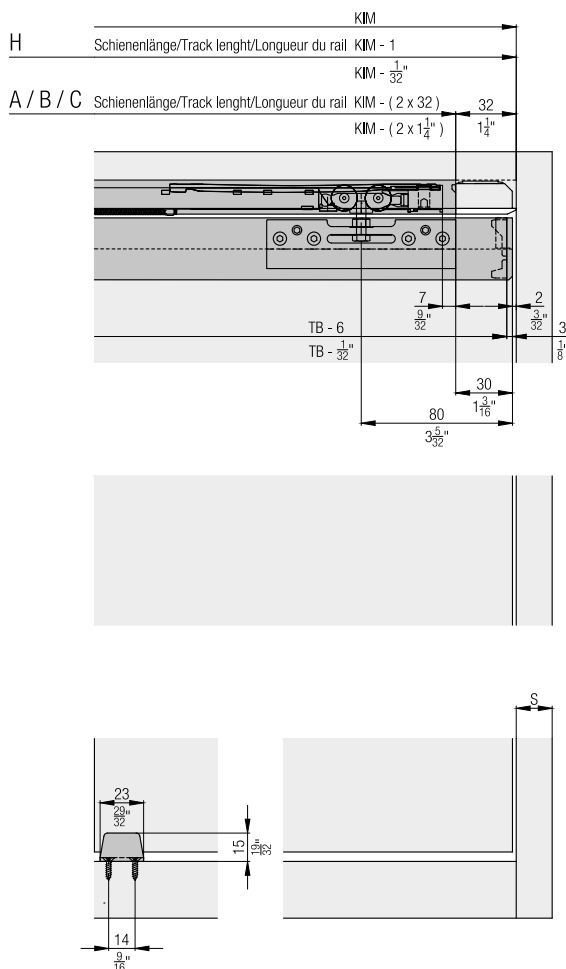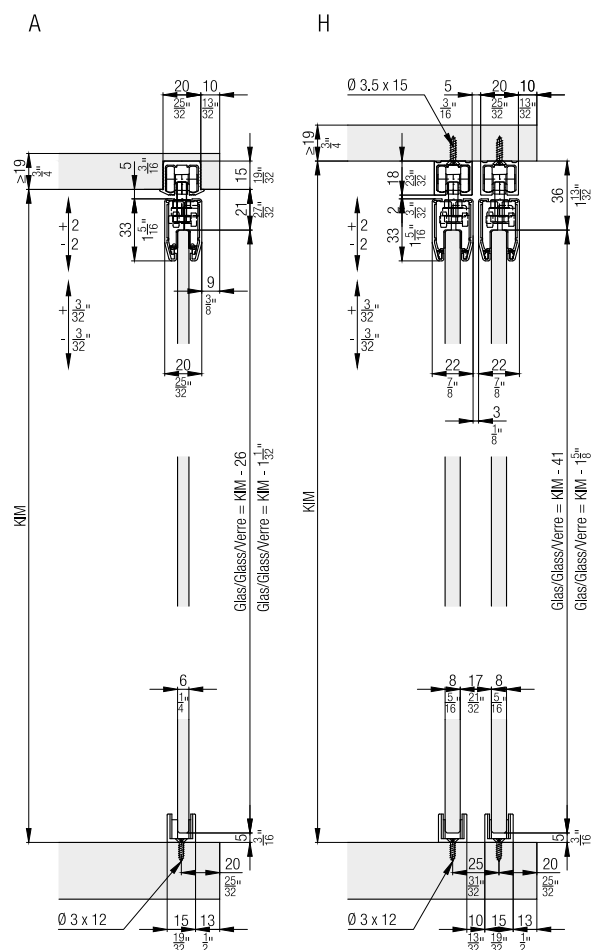


# Set for 1 glass door up to 36 kg (79 lbs.), with height adjustment

	No.
Hawa Clipo 36 G IS, for 1 door	053.3363.071

## Set consisting of:




	Running gear, plain bearings, rollers, plastic, white	2	057.3149.071
	Stopper, plastic, gray	2	057.3148.071
	Hexagon screw, M5x18 mm (3/16"x23/32"), steel, zinc-plated	2	600.0000.646
	Prevailing torque, M5, steel, zinc-plated	2	600.0000.459
	Clamping shoe, zinc diecast, aluminum, glass thickness 6-8 mm (1/4"-5/16")	2	053.3161.071
	Bottom guide glass, playfree, chrome-plated, matt	1	053.3097.901
	Slider bottom guide, plastic, grey, 4-piece set	1	053.0146.001
	Flat countersunk head chipboard screw, 3x12 mm (1/8"x15/32"), steel, zinc-plated	2	766.5030.112

# Running tracks


		mm (inch)	No.
	A: Single running track, for glue fixing, aluminum, anodized	2,500 (8' 2 7/16")	053.3324.250
		3,500 (11' 5 25/32")	053.3324.350
		6,000 (19' 8 7/32")	053.3324.600
	B: Single running track, swivel lug, aluminum, anodized (not for hard wood/ MDF)	2,500 (8' 2 7/16")	053.3327.250
		3,500 (11' 5 25/32")	053.3327.350
		6,000 (19' 8 7/32")	053.3327.600
	C: Single running track, for screw fixing, aluminum, anodized	2,500 (8' 2 7/16")	053.3325.250
		3,500 (11' 5 25/32")	053.3325.350
		6,000 (19' 8 7/32")	053.3325.600
	H: Single running track, for screw fixing, aluminum, anodized	2,500 (8' 2 7/16")	053.3326.250
		3,500 (11' 5 25/32")	053.3326.350
		6,000 (19' 8 7/32")	053.3326.600

## Track end piece set for single running tracks

	No.
Track-end section, for screw fixing, plastic, gray, 2-piece set	053.3354.071
Track-end section, swivel lug, plastic, gray, 2-piece set	053.3355.051

		053.3354.071 053.3355.051	No.
	Track-end piece, for screw fixing, plastic	2	053.0334.001
	Chipboard screw, 4x12 mm (5/32"x15/32"), steel, zinc-plated	2	600.0000.704
	Track-end piece, with swivel lug, plastic	2	053.3351.071


## Panels

		mm (inch)	No.
	Clip-on panel for clamping shoe, aluminum, anodized	2,500 (8' 2 7/16")	053.3168.250
		3,500 (11' 5 25/32")	053.3168.350
		6,000 (19' 8 7/32")	053.3168.600

## End cap set






	No.
End cap for clip	053.3163.072

## Set consisting of:



	Cover cap, plastic, anthracite	2	053.3169.001
	Clip to panel, plastic, gray	4	057.3060.001
	Sealing profile, 60 mm (2 3/8"), plastic, black	2	057.3072.002

## Soft close up to 15/26/36 kg (33/57/79 lbs.)


	No.
Soft close, up to 15 kg (33 lbs.)	057.3159.071
Soft close, up to 26 kg (57 lbs.)	057.3159.072
Soft close, up to 40 kg (88 lbs.)	057.3159.073

		057.3159.071	057.3159.072	057.3159.073	No.
	Soft close, up to 15 kg (33 lbs.)	2			057.3156.071
	Release piece soft close	2	2	2	057.0182.101
	Thread rolling rounded head screw, M2.5x5 mm (3/32"x3/16"), steel, zinc-plated	2	2	2	600.0000.764
	Soft close, up to 26 kg (57 lbs.)		2		057.3156.072
	Soft close, up to 40 kg (88 lbs.)			2	057.3156.073


## Handles

	No.
	053.3323.971
	053.3091.982
	053.3091.983
	053.3158.901


## Accessories

	No.
	040.3142.071

# Further installation examples

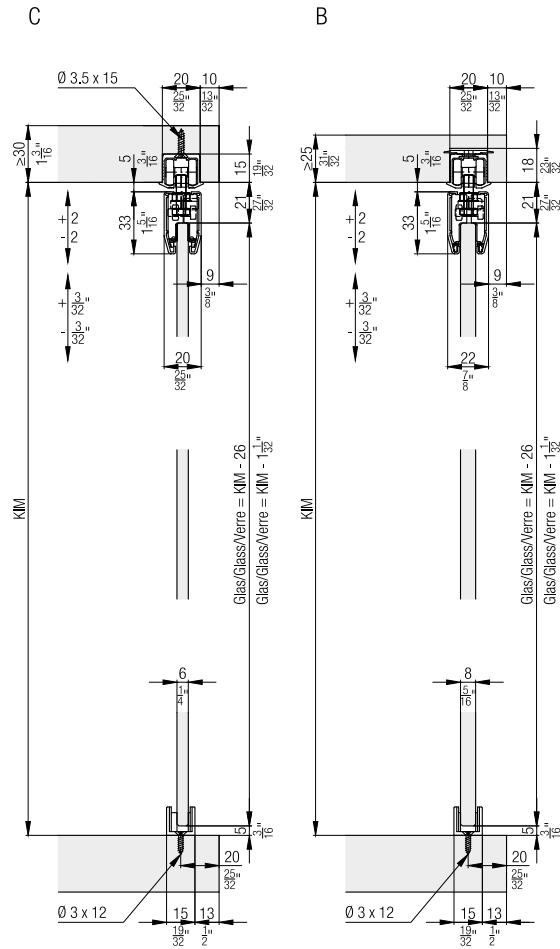

# Calculations


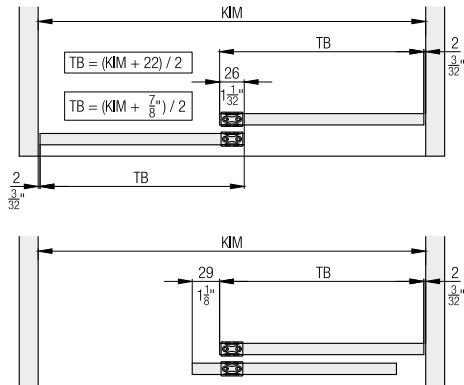


## Soft close



	Z ≥	
	1	2
Hawa Porta 40 H	1' 4 <sup>17</sup> / <sub>32</sub> "	2' 0 <sup>13</sup> / <sub>32</sub> "
Hawa Porta 40 GE	1' 2 <sup>13</sup> / <sub>16</sub> "	1' 10 <sup>11</sup> / <sub>16</sub> "
Hawa Clipo 26 H IS	1' 4 <sup>17</sup> / <sub>32</sub> "	2' 0 <sup>13</sup> / <sub>32</sub> "
Hawa Clipo 26 H MS	1' 6 <sup>1</sup> / <sub>32</sub> "	2' 1 <sup>29</sup> / <sub>32</sub> "
Hawa Clipo 36 H IS	1' 4 <sup>17</sup> / <sub>32</sub> "	2' 0 <sup>13</sup> / <sub>32</sub> "
Hawa Clipo 36 H MS	1' 6 <sup>1</sup> / <sub>32</sub> "	2' 1 <sup>29</sup> / <sub>32</sub> "
Hawa Clipo 36 HM IS	1' 4 <sup>17</sup> / <sub>32</sub> "	2' 0 <sup>13</sup> / <sub>32</sub> "
Hawa Clipo 26 GR IS	1' 4 <sup>17</sup> / <sub>32</sub> "	2' 0 <sup>13</sup> / <sub>32</sub> "
Hawa Clipo 36 G IS	1' 4 <sup>17</sup> / <sub>32</sub> "	2' 0 <sup>13</sup> / <sub>32</sub> "
Hawa Clipo 36 GPK IS	1' 4 <sup>17</sup> / <sub>32</sub> "	2' 0 <sup>13</sup> / <sub>32</sub> "
Hawa Clipo 36 GPPK IS	1' 4 <sup>17</sup> / <sub>32</sub> "	2' 0 <sup>13</sup> / <sub>32</sub> "
Hawa Regal C 26 HM IS	1' 4 <sup>17</sup> / <sub>32</sub> "	2' 0 <sup>13</sup> / <sub>32</sub> "
Hawa Regal C 26 GR IS	1' 3 <sup>3</sup> / <sub>4</sub> "	1' 11 <sup>5</sup> / <sub>8</sub> "

	Z ≥	
	1	2
Hawa Porta 40 H	420	620
Hawa Porta 40 GE	376	576
Hawa Clipo 26 H IS	420	620
Hawa Clipo 26 H MS	458	658
Hawa Clipo 36 H IS	420	620
Hawa Clipo 36 H MS	458	658
Hawa Clipo 36 HM IS	420	620
Hawa Clipo 26 GR IS	420	620
Hawa Clipo 36 G IS	420	620
Hawa Clipo 36 GPK IS	420	620
Hawa Clipo 36 GPPK IS	420	620
Hawa Regal C 26 HM IS	420	620
Hawa Regal C 26 GR IS	400	600

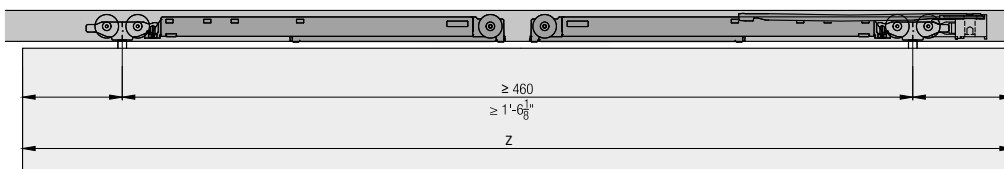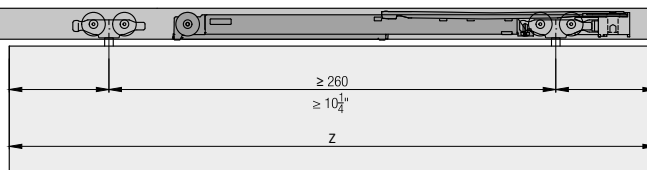

## Accessories

– Glass recommendations from page 280

## Planning/execution

Further information about the product can be found on [www.hawa.com](http://www.hawa.com).