


Fitting for 1-2 top-running wooden doors up to 36 kg (79 lbs.), with groove mounted running track. With soft and self closing mechanism. Design Inside.

Product highlights


- Aesthetics** Optimum solution for serving hatches thanks to the lateral, concealed running system
- Flexibility** Wide range of applications for sliding door cabinets in any dimension

Technical specifications

- Max.** 36 kg (79 lbs.)
- Max.** 2400 mm (7'10 7/16")
- Max.** 1000 mm (3'3 3/8")
- 19-40 mm (3/4" to 1 9/16")**

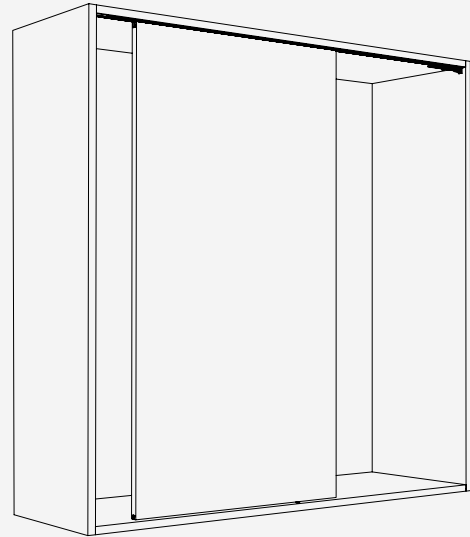




Installation examples

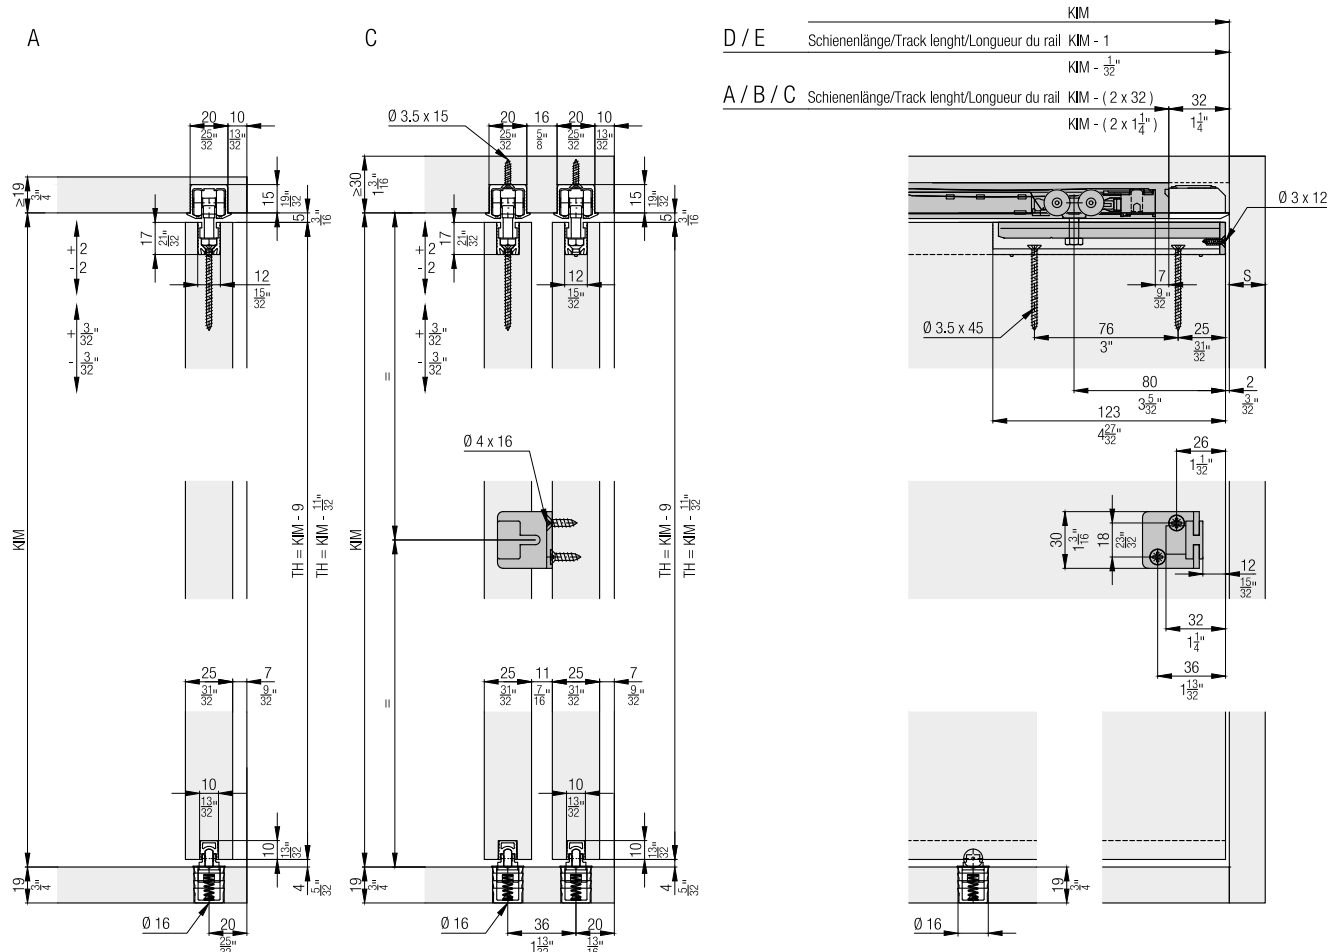

**Set for 1 wooden door up to 36 kg (79 lbs.),
with height adjustment
Always order 2 sets with 2 doors.**

		No.	
Hawa Clipo 36 HM IS, for 1 door		053.3358.071	
		053.3358.071	No.
Set consisting of:			
	Running gear	2	053.3343.071
	Flat countersunk head chipboard screw, 3x12 mm (1/8 "x 15/32"), steel, zinc-plated, black	2	600.0000.703
	Stopper, plastic, gray	2	057.3148.071
	Housing, aluminum	2	053.3073.007
	Flat countersunk head chipboard screw 3.5x45 mm (5/32"x1 25/32"), steel, zinc-plated	4	600.0000.706
	Bottom guide, plastic, gray	1	055.3081.071

**Door follower
Order 1 set with 2 doors.**

		No.	
Door follower, steel, zinc-plated, with 2 doors		055.3124.071	
		055.3124.071	No.
Set consisting of:			
	Follower Hawa Combino/ Hawa Clipo, plastic	1	055.3123.071
	Adapter to follower steel, zinc-plated	1	055.0213.101
	Flat countersunk head chipboard screw 4x16 mm (5/32"x5/8"), steel, zinc-plated	2	600.0000.253




Running tracks

		mm (inch)	No.
	A: Single running track, for glue fixing, aluminum, anodized	2,500 (8' 2 7/16")	053.3324.250
		3,500 (11' 5 25/32")	053.3324.350
		6,000 (19' 8 7/32")	053.3324.600
	B: Single running track, swivel lug, aluminum, anodized (not for hard wood/ MDF)	2,500 (8' 2 7/16")	053.3327.250
		3,500 (11' 5 25/32")	053.3327.350
		6,000 (19' 8 7/32")	053.3327.600
	C: Single running track, for screw fixing, aluminum, anodized	2,500 (8' 2 7/16")	053.3325.250
		3,500 (11' 5 25/32")	053.3325.350
		6,000 (19' 8 7/32")	053.3325.600
	D: Double running track, for screw fixing, aluminum, anodized, for door thickness of 25 mm (31/32")	2,500 (8' 2 7/16")	053.3328.250
		3,500 (11' 5 25/32")	053.3328.350
		6,000 (19' 8 7/32")	053.3328.600
	E: Double running track, for screw fixing, aluminum, anodized, for door thickness of 19 mm (3/4")	2,500 (8' 2 7/16")	053.3339.250
		3,500 (11' 5 25/32")	053.3339.350
		6,000 (19' 8 7/32")	053.3339.600


Track end piece set for single running tracks

	No.
Track-end section, for screw fixing, plastic, gray, 2-piece set	053.3354.071
Track-end section, swivel lug, plastic, gray, 2-piece set	053.3355.051

Set consisting of:

		053.3354.071	053.3355.051	No.
	Track-end piece, for screw fixing, plastic	2		053.0334.001
	Chipboard screw, 4x12 mm (5/32"x15/32"), steel, zinc-plated	2		600.0000.704
	Track-end piece, with swivel lug, plastic		2	053.3351.071






Guide tracks

		mm (inch)	No.
	Guide track, for glue fixing, plastic, gray	2,500 (8' 2 7/16")	055.3171.250
		3,500 (11' 5 25/32")	055.3171.350
		6,000 (19' 8 7/32")	055.3171.600


Soft close up to 15/26/36 kg (33/57/79 lbs.)

	No.
Soft close, up to 15 kg (33 lbs.)	057.3159.071
Soft close, up to 26 kg (57 lbs.)	057.3159.072
Soft close, up to 40 kg (88 lbs.)	057.3159.073



Set consisting of:

		057.3159.071	057.3159.072	057.3159.073	No.
	Soft close, up to 15 kg (33 lbs.)	2			057.3156.071
	Release piece soft close	2	2	2	057.0182.101
	Thread rolling rounded head screw, M2.5x5 mm (3/32"x3/16"), steel, zinc-plated	2	2	2	600.0000.764
	Soft close, up to 26 kg (57 lbs.)		2		057.3156.072
	Soft close, up to 40 kg (88 lbs.)			2	057.3156.073

Guide tracks 4-point guidance




		mm (inch)	No.
	Single guide track, for glue fixing, aluminum, anodized	6,000 (19' 8 7/32")	053.3296.600

Components 4-point guidance


		No.
	Bottom guide Hawa Clipo IS/Hawa Regal C 16, plastic, anthracite	040.3124.071
	Stopper guide track, plastic, grey	053.5094.071

Door centering


	No.
Door centering, plastic, anthracite, for 2 doors	053.3207.071

		053.3207.071	No.
Set consisting of:			
	Housing door centering, plastic, anthracite	2	053.5014.001
	Pin door centering, plastic, anthracite	2	053.0171.001
	Rubber buffer, plastic, grey	1	025.0107.001


Accessories

		No.
	Track cleaner, plastic, red	040.3142.071


Further installation examples

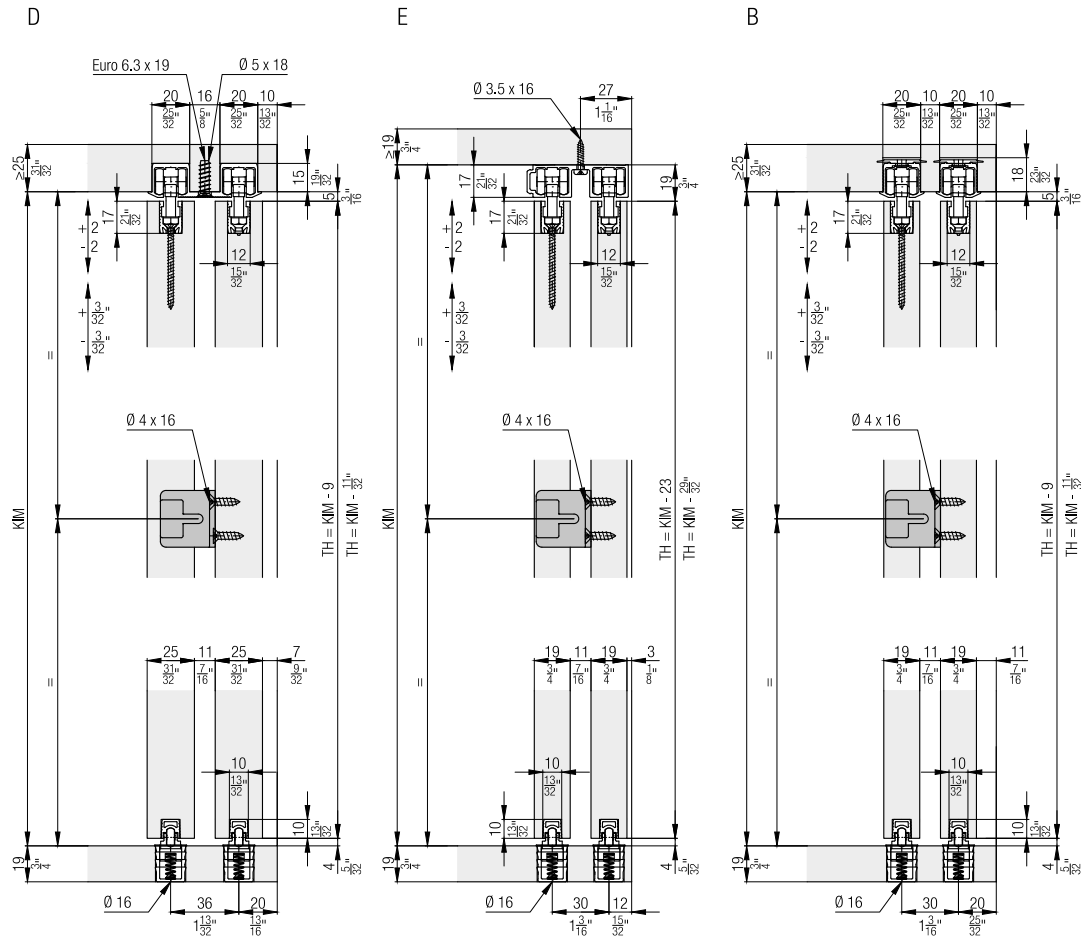


Calculations

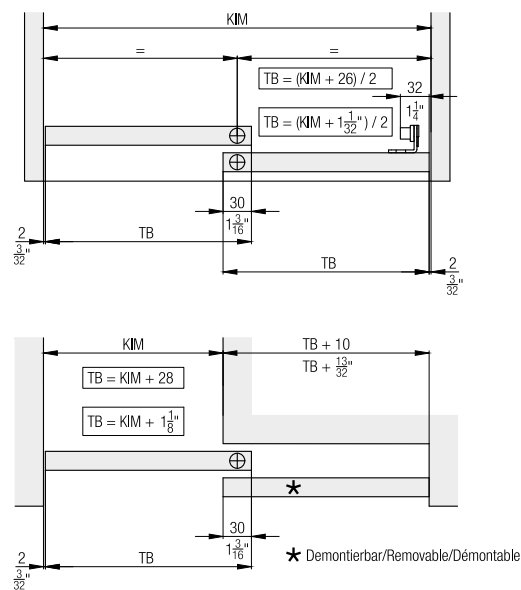

4 point guidance

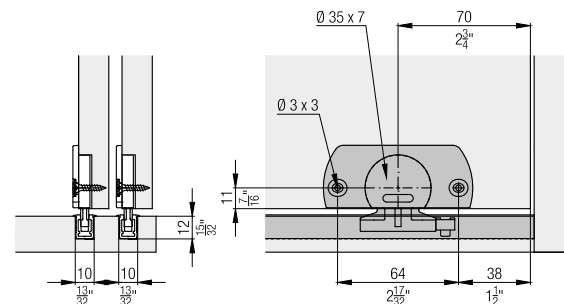

Door centering


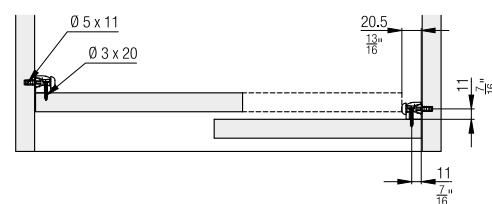


Soft close



	Z ≥	
	1	2
Hawa Porta 40 H	1' 4 $\frac{17}{32}$ "	2' 0 $\frac{13}{32}$ "
Hawa Porta 40 GE	1' 2 $\frac{13}{16}$ "	1' 10 $\frac{11}{16}$ "
Hawa Clipo 26 H IS	1' 4 $\frac{17}{32}$ "	2' 0 $\frac{13}{32}$ "
Hawa Clipo 26 H MS	1' 6 $\frac{1}{32}$ "	2' 1 $\frac{29}{32}$ "
Hawa Clipo 36 H IS	1' 4 $\frac{17}{32}$ "	2' 0 $\frac{13}{32}$ "
Hawa Clipo 36 H MS	1' 6 $\frac{1}{32}$ "	2' 1 $\frac{29}{32}$ "
Hawa Clipo 36 HM IS	1' 4 $\frac{17}{32}$ "	2' 0 $\frac{13}{32}$ "
Hawa Clipo 26 GR IS	1' 4 $\frac{17}{32}$ "	2' 0 $\frac{13}{32}$ "
Hawa Clipo 36 G IS	1' 4 $\frac{17}{32}$ "	2' 0 $\frac{13}{32}$ "
Hawa Clipo 36 GPK IS	1' 4 $\frac{17}{32}$ "	2' 0 $\frac{13}{32}$ "
Hawa Clipo 36 GPPK IS	1' 4 $\frac{17}{32}$ "	2' 0 $\frac{13}{32}$ "
Hawa Regal C 26 HM IS	1' 4 $\frac{17}{32}$ "	2' 0 $\frac{13}{32}$ "
Hawa Regal C 26 GR IS	1' 3 $\frac{3}{4}$ "	1' 11 $\frac{5}{8}$ "

	Z ≥	
	1	2
Hawa Porta 40 H	420	620
Hawa Porta 40 GE	376	576
Hawa Clipo 26 H IS	420	620
Hawa Clipo 26 H MS	458	658
Hawa Clipo 36 H IS	420	620
Hawa Clipo 36 H MS	458	658
Hawa Clipo 36 HM IS	420	620
Hawa Clipo 26 GR IS	420	620
Hawa Clipo 36 G IS	420	620
Hawa Clipo 36 GPK IS	420	620
Hawa Clipo 36 GPPK IS	420	620
Hawa Regal C 26 HM IS	420	620
Hawa Regal C 26 GR IS	400	600

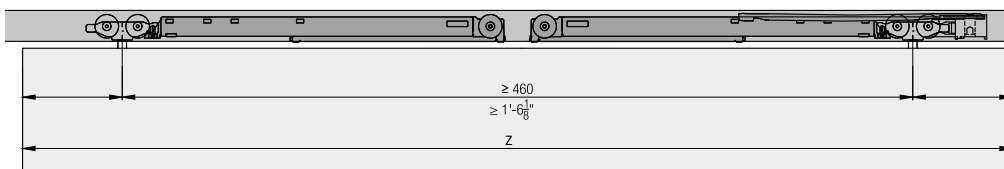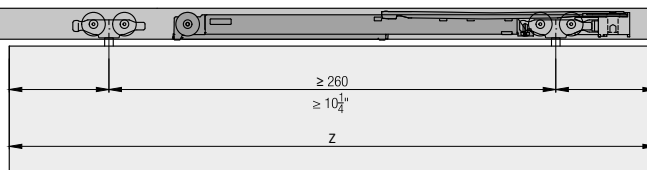

Accessories

– Straightening fitting from page 265

Planning/execution

Further information about the product can be found on www.hawa.com.