

Fitting for 2 bottom-running wooden doors up to 20 kg (44 lbs.) with screwed on running track. Soft close optional. Design Forslide.

Product highlights



Comfort

High operating convenience thanks to proven running system and optional soft closing technology



Productivity

No cabinet processing, high degree of pre-assembly and access from the front for easy, quick installation

Technical specifications



Max. 20 kg (44 lbs.)




Max. 2200 mm (7'2 5/8")










Max. 1200 mm (3'11 1/4")



19 mm (3/4")

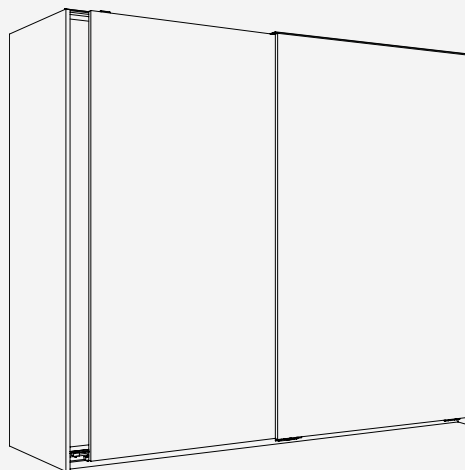



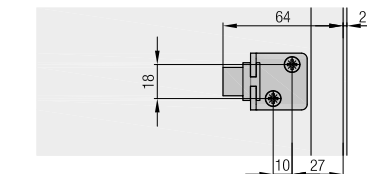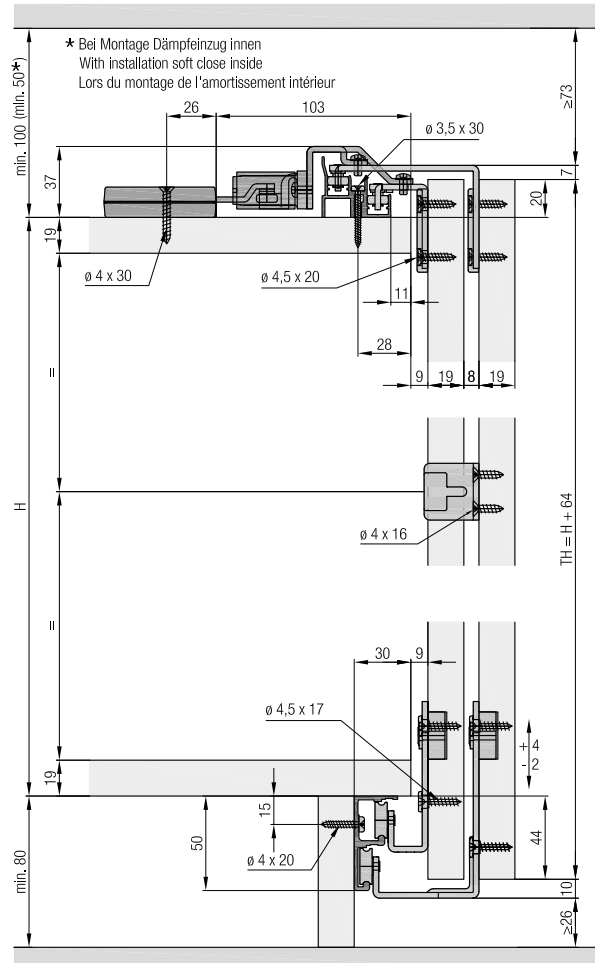





Installation examples




Set for 2 wooden doors

	No.
Hawa Combino 20 H FS, for 2 doors	056.3182.071


Set consisting of:

	Running gear, interior door, steel, zinc-plated	2	056.3185.171
	Running gear, exterior door, steel, zinc-plated	2	056.3186.171
	Guide bracket, interior door, steel, zinc-plated	2	055.3107.171
	Guide bracket, exterior door, steel, zinc-plated	2	055.3108.171
	Guide bracket housing, plastic, anthracite	4	053.3064.001
	Stopper, plastic, gray	2	056.3189.071
	Stopper, with retention spring, plastic, gray	2	056.3189.072
	Stopper guide, plastic, gray	4	040.3079.074
	Door follower, with 2 doors, steel, zinc-plated	1	055.3124.071
	Washer-and-screw assembly, 4.5x17 mm, steel, zinc-plated	16	055.0100.101
	Countersunk head screw, 4.5x20 mm, steel, zinc-plated	16	600.0000.167


Running tracks

	mm (inch)	No.
	2500 (8'2 7/16")	056.3184.250
	3500 (11'5 25/32")	056.3184.350
	6000 (19'8 7/32")	056.3184.600

Guide tracks

	mm (inch)	No.
	2500 (8'2 7/16")	056.3072.250
	3500 (11'5 25/32")	056.3072.350
	6000 (19'8 7/32")	056.3072.600







Panels

	mm (inch)	No.
	2500 (8'2 7/16")	055.3130.250
	3500 (11'5 25/32")	055.3130.350
	6000 (19'8 7/32")	055.3130.600

Soft close (installation outside)

	No.
Soft close, up to 18 kg (40 lbs.), with narrow follower, 2 pieces	055.3091.072
Soft close, 18-40 kg (40-88 lbs.), with narrow follower, 2 pieces	055.3091.074





Set consisting of:

		055.3091.072	055.3091.074	No.
	Soft close, left, up to 18 kg (40 lbs.)	1		055.3090.071
	Soft close, right, up to 18 kg (40 lbs.)	1		055.3090.072
	Follower, for soft close, right, plastic, gray	1	1	055.3041.071
	Follower, for soft close, left, plastic, gray	1	1	055.3041.072
	Fillister head screw, 4x16 mm, steel, zinc-plated	4	4	600.0000.166
	Countersunk head screw, 4x30 mm, steel, zinc-plated	4	4	600.0000.439
	Soft close, left, 18-40 kg (40-88 lbs.)		1	055.3090.073
	Soft close, right, 18-40 kg (40-88 lbs.)		1	055.3090.074

**Adapter soft close (installation outside)
for No. 055.3091.072 and 055.3091.074**

	No.
Adapter set, for soft close	055.3129.071









Set consisting of:

		055.3129.071	No.
	Adapter, for soft close, interior door, top, steel, zinc-plated	1	055.0211.101
	Adapter, for soft close, exterior door, top, steel, zinc-plated	1	055.0212.101
	Rounded head screw, M4x8 mm, steel, zinc-plated	4	759.0408.108
	Thread-cutting rounded head screw, M4x8 mm, steel, zinc-plated	4	600.0000.328


Soft close (installation inside)

	No.
Soft close, up to 18 kg (40 lbs.), with wide follower, 2 pieces	055.3091.071
Soft close, 18–40 kg (40–88 lbs.), with wide follower, 2 pieces	055.3091.073


Set consisting of:

	055.3091.071	055.3091.073	No.
 Soft close, left, up to 18 kg (40 lbs.)	1		055.3090.071
 Soft close, right, up to 18 kg (40 lbs.)	1		055.3090.072
 Follower, for soft close, right, plastic, gray	1	1	055.3040.071
 Follower, for soft close, left, plastic, gray	1	1	055.3040.072
 Fillister head screw, 4x16 mm, steel, zinc-plated	6	6	600.0000.166
 Countersunk head screw, 4x30 mm, steel, zinc-plated	4	4	600.0000.439
 Soft close, left, 18–40 kg (40–88 lbs.)		1	055.3090.073
 Soft close, right, 18–40 kg (40–88 lbs.)		1	055.3090.074


Calculations

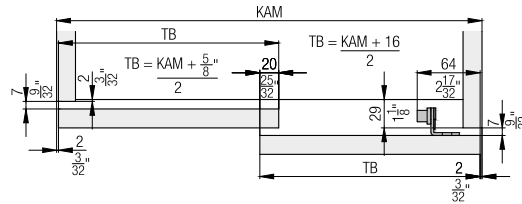


Optional: Guide track installation from below

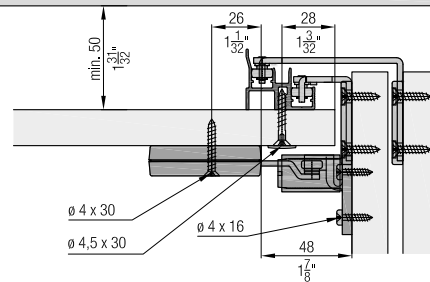


Handle profiles



Soft close (installation inside)

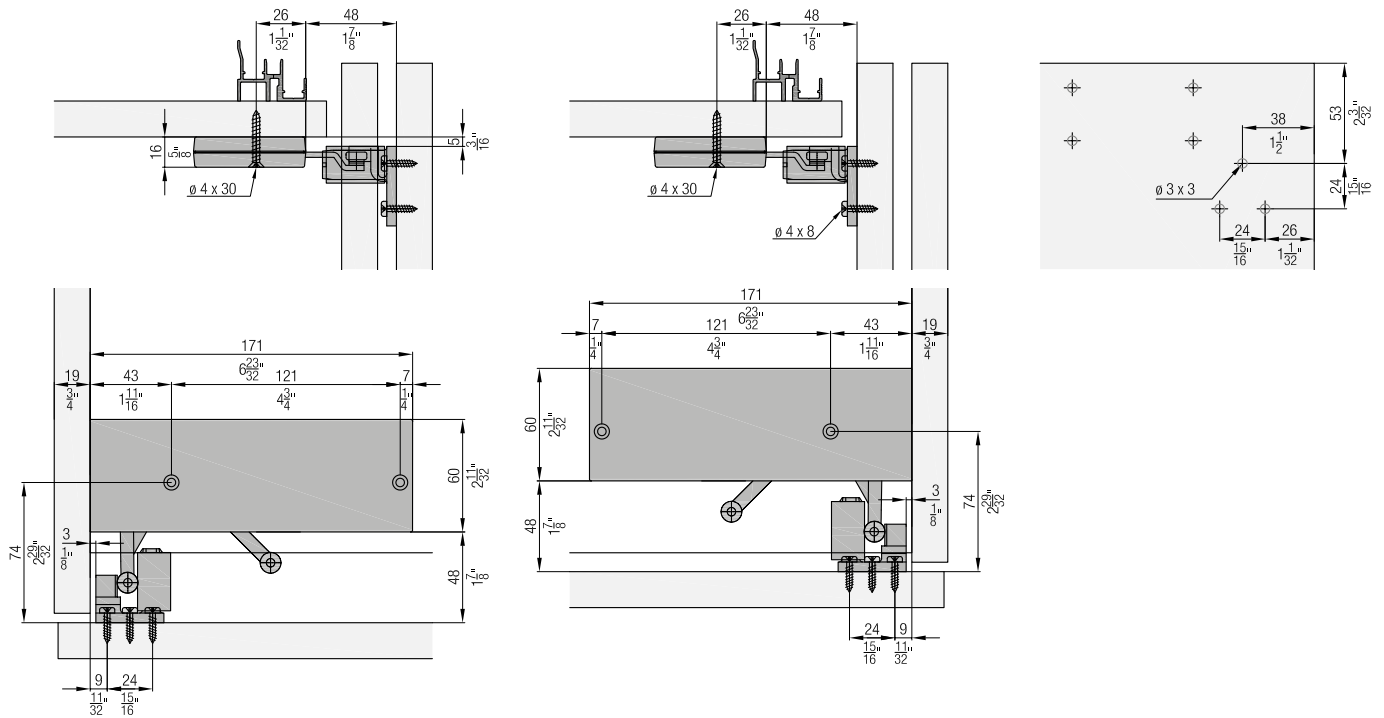

Soft close (installation outside)

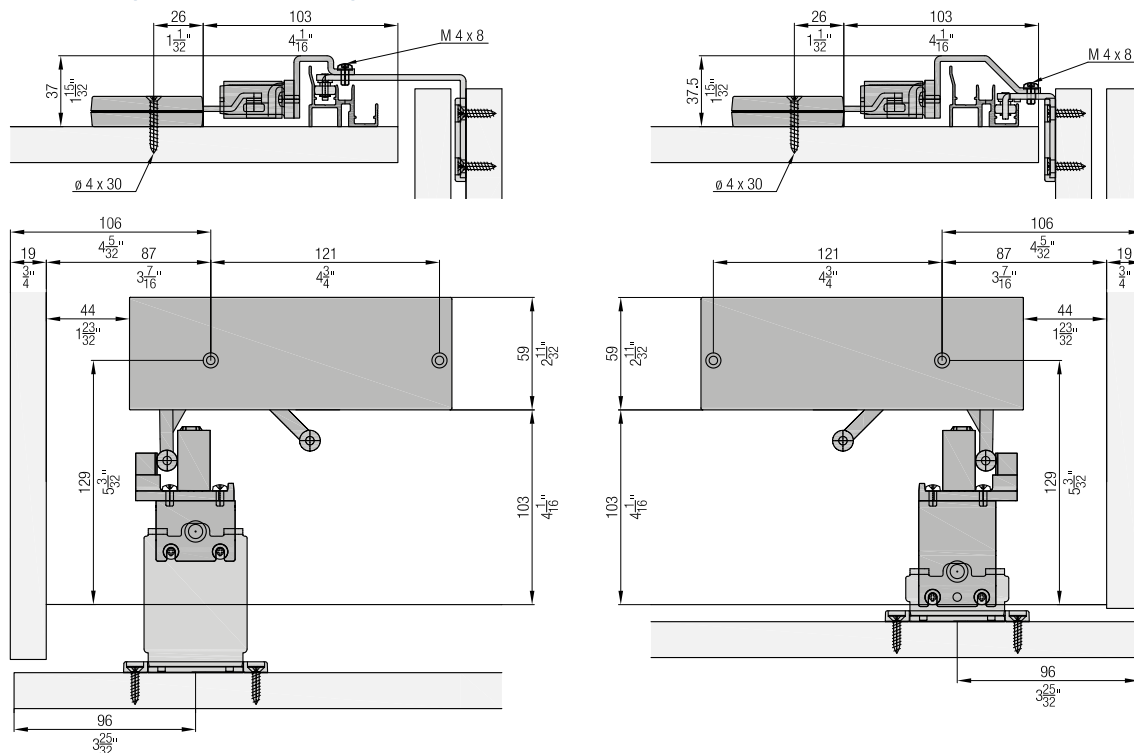

Accessories

- Straightening fitting from page 265
- Handle profiles from page 268
- Order overview soft close from page 270

Planning/execution

Further information about the product can be found on www.hawa.com.