






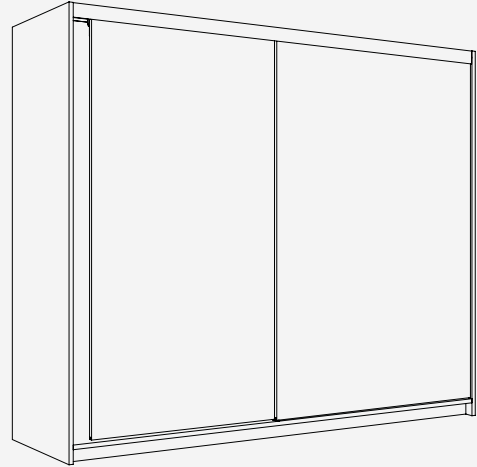
Fitting for 2 top-running wooden doors up to 20 kg (44 lbs.), with screwed on running track and wooden or aluminum clip panel. Soft close optional. Design Inside.

Product highlights

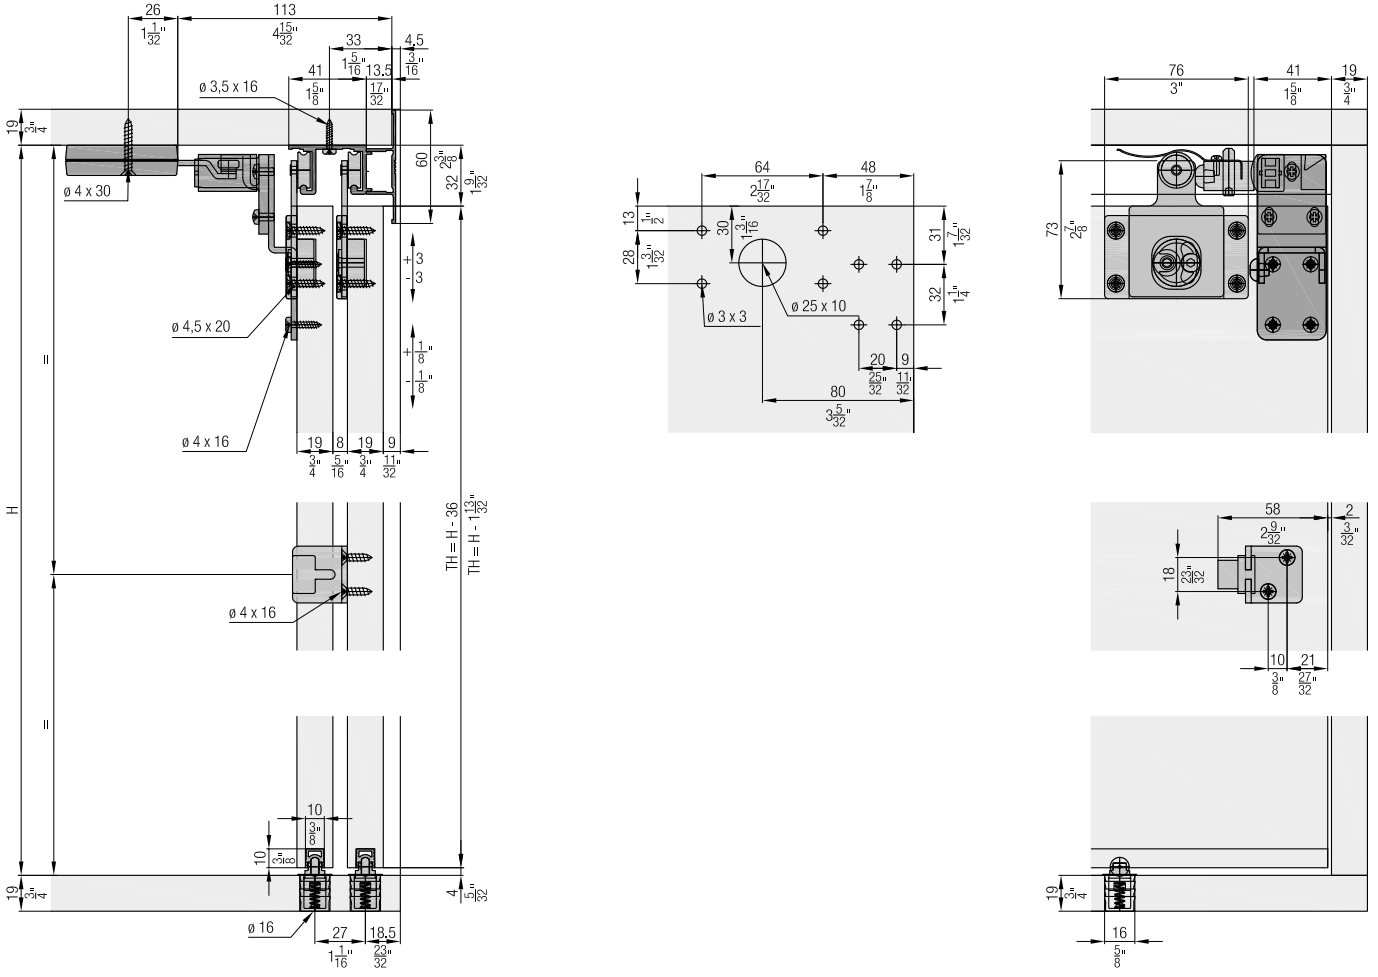
-  **Comfort** High operating convenience thanks to proven running system and optional soft closing technology
-  **Productivity** No cabinet processing, high degree of pre-assembly and access from the front for easy, quick installation

Technical specifications

-  Max. 20 kg (44 lbs.)
-  Max. 2200 mm (7'2 5/8")
-  Max. 1200 mm (3'11 1/4")
-  19 mm (3/4")










Installation examples





Set for 2 wooden doors

	No.
Hawa Combino 20 H IS, for 2 doors	056.3180.071


Set consisting of:

		056.3180.071	No.
	Running gear, steel, zinc-plated	4	056.3176.171
	Running gear housing, plastic, anthracite	4	056.3175.001
	Bottom guide, plastic, gray	2	055.3081.071
	Stopper, plastic, gray	2	056.3189.071
	Stopper, with retention spring, plastic, gray	2	056.3189.072
	Door follower, with 2 doors, steel, zinc-plated	1	055.3124.071
	Countersunk head screw, 4.5x20 mm, steel, zinc-plated	16	600.0000.167


Running tracks

		mm (inch)	No.
	Single running track, aluminum, pre-drilled	2500 (8'2 7/16")	056.3011.250
		3500 (11'5 25/32")	056.3011.350
		6000 (19'8 7/32")	056.3011.600
	Double running track, aluminum, pre-drilled	2500 (8'2 7/16")	056.3010.250
		3500 (11'5 25/32")	056.3010.350
		6000 (19'8 7/32")	056.3010.600

Guide tracks

		mm (inch)	No.
	Guide track, plastic, gray, for glue fixing	2500 (8'2 7/16")	055.3171.250
		3500 (11'5 25/32")	055.3171.350
		6000 (19'8 7/32")	055.3171.600

Panels


		mm (inch)	No.
	Clip-on panel, aluminum, anodized	2500 (8'2 7/16")	056.3174.250
		3500 (11'5 25/32")	056.3174.350
		6000 (19'8 7/32")	056.3174.600

Soft close

Adapter soft close must be ordered separately

	No.
Soft close, up to 18 kg (40 lbs.), with wide follower, 2 pieces	055.3091.071
Soft close, 18–40 kg (40–88 lbs.), with wide follower, 2 pieces	055.3091.073






Set consisting of:

	055.3091.071	055.3091.073	No.
 Soft close, left, up to 18 kg (40 lbs.)	1		055.3090.071
 Soft close, right, up to 18 kg (40 lbs.)	1		055.3090.072
 Follower, for soft close, right, plastic, gray	1	1	055.3040.071
 Follower, for soft close, left, plastic, gray	1	1	055.3040.072
 Fillister head screw, 4x16 mm, steel, zinc-plated	6	6	600.0000.166
 Countersunk head screw, 4x30 mm, steel, zinc-plated	4	4	600.0000.439
 Soft close, left, 18–40 kg (40–88 lbs.)			1 055.3090.073
 Soft close, right, 18–40 kg (40–88 lbs.)			1 055.3090.074



Adapter soft close for No. 055.3091.071 and 055.3091.073

	No.
Adapter set, for soft close	055.3043.073

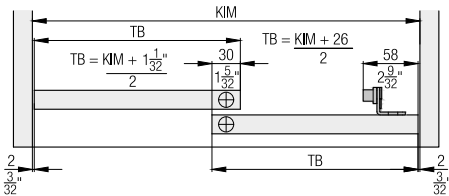
Set consisting of:

	055.3043.073	No.
 Adapter, for soft close, exterior door, steel, zinc-plated	1	055.0133.101
 Adapter, for soft close, interior door, steel, zinc-plated	1	055.0128.101
 Rounded head screw, M4x8 mm, steel, zinc-plated	6	759.0408.108
 Fillister head screw, 4x16 mm, steel, zinc-plated	8	600.0000.166
 Rubber buffer, plastic, grey	1	025.0107.001

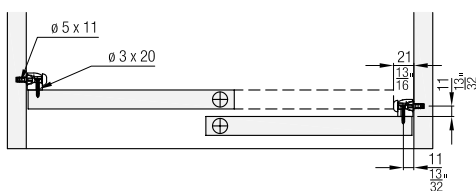
Accessories

	No.
 Clip-on component, for wooden panel, every 500 mm (1'7 11/16\"), aluminum, pre-drilled	056.3039.001
 Door centering, for 2 doors, plastic, anthracite	053.3207.071

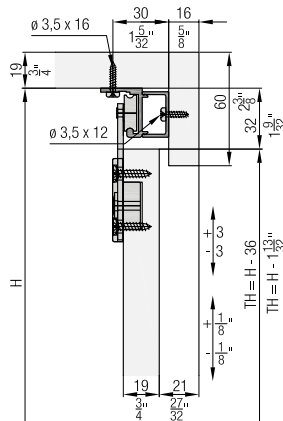
Calculations



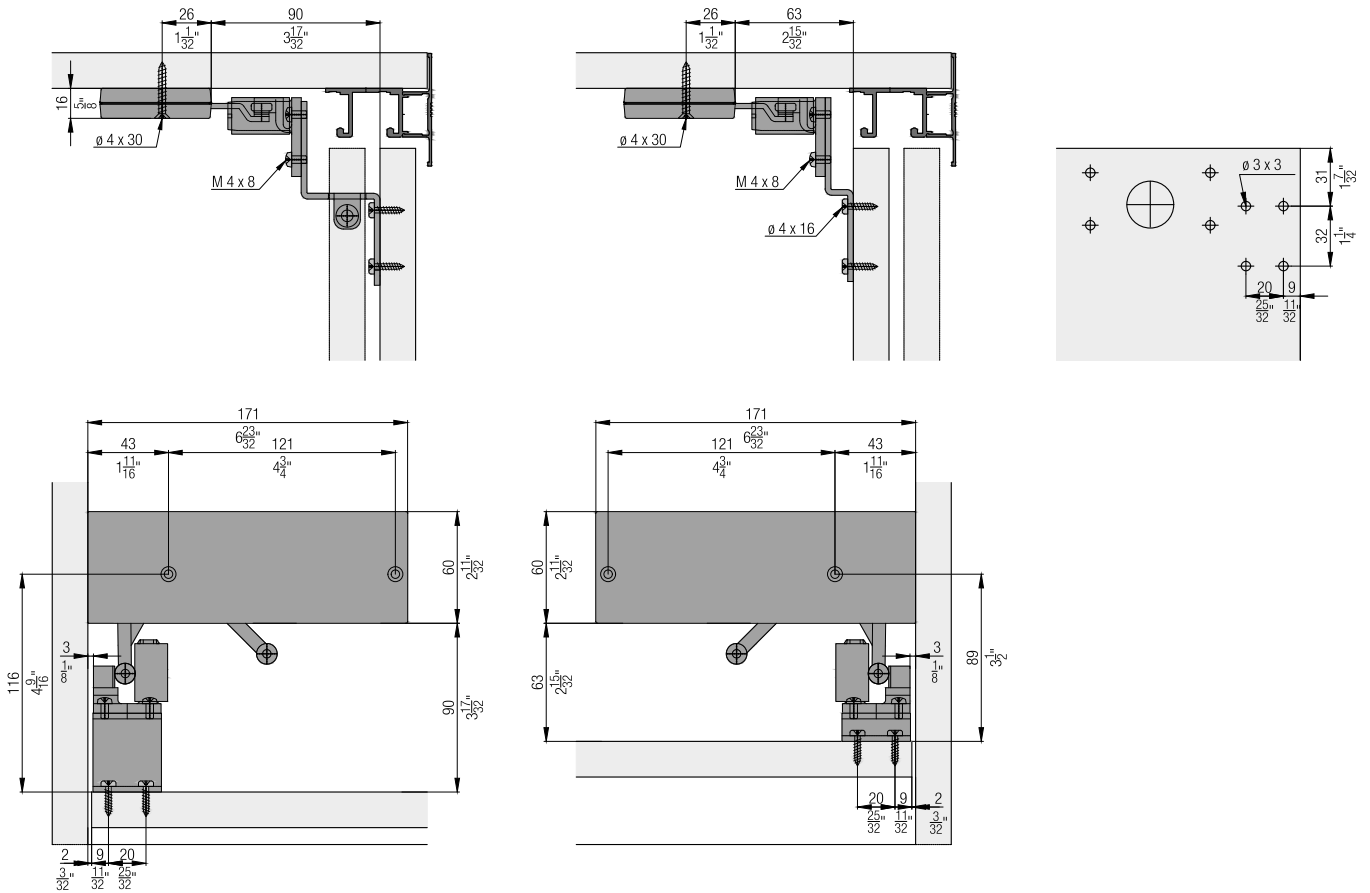
Door centering



Optional: Installation with wooden panel



Soft close



Accessories

- Straightening fitting from page 236
- Handle profiles from page 238
- Order overview soft close from page 240

Planning/execution

Further information about the product can be found on www.hawa.com.