# Fitting for 2 top-running wooden doors up to 20 kg (44 lbs.), with screwed on running track and wooden or aluminum clip panel. Soft close optional. Design Inslide.

## **Product highlights**


**☐** Comfort

High operating convenience thanks to proven

running system and optional soft closing technology

Productivity No cabinet processing, high degree of pre-assembly

and access from the front for easy, quick installation



#### **Technical specifications**

/त\ Max

Max. 20 kg (44 lbs.)

↑ Max.

Max.


2200 mm (7'2 5/8")


 $\stackrel{\longleftarrow}{=}$ 


1200 mm (3'11 1/4")


→[[← 19 mm (3/4'')


#### **Installation examples**

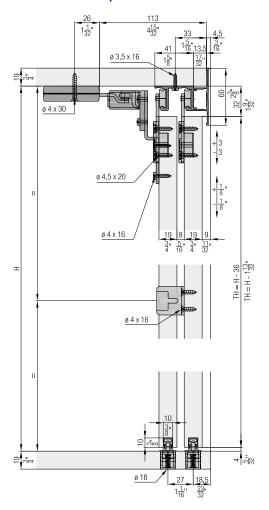









#### Set for 2 wooden doors

			No.
Hawa Combino 20 H IS, for 2 doors		056.3180.071	
Set consisting	of:	056.3180.071	No.
6	Running gear, steel, zinc-plated	4	056.3176.171
600	Running gear housing, plastic, anthracite	4	056.3175.001
	Bottom guide, plastic, gray	2	055.3081.071
	Stopper, plastic, gray	2	056.3189.071
	Stopper, with retention spring, plastic, gray	2	056.3189.072
*	Door follower, with 2 doors, steel, zinc-plated	1	055.3124.071
	Countersunk head screw, 4.5x20 mm, steel, zinc- plated	16	600.0000.167

#### **Running tracks**

		mm (inch)	No.
/ /// //	Single running track, aluminum, pre-drilled	2500 (8'2 7/16'')	056.3011.250
		3500 (11'5 25/32'')	056.3011.350
		6000 (19'8 7/32'')	056.3011.600
	Double running track, aluminum, pre-drilled	2500 (8'2 7/16'')	056.3010.250
		3500 (11'5 25/32'')	056.3010.350
		6000 (19'8 7/32'')	056.3010.600

# **Guide tracks**

		mm (inch)	No.
/ /////		2500 (8'2 7/16'')	055.3171.250
	Guide track, plastic, gray, for glue fixing	3500 (11'5 25/32'')	055.3171.350
		6000 (19'8 7/32'')	055.3171.600

## **Panels**

	mm (inch)	No.
Clip-on panel, aluminum, anodized	2500 (8'2 7/16'')	056.3174.250
	3500 (11'5 25/32'')	056.3174.350
	6000 (19'8 7/32'')	056.3174.600

### Soft close Adapter soft close must be ordered separately

	No.
Soft close, up to 18 kg (40 lbs.), with wide follower, 2 pieces	055.3091.071
Soft close, 18–40 kg (40–88 lbs.), with wide follower, 2 pieces	055.3091.073

Set consisting	of:	055.3091.071	055.3091.073	No.
	Soft close, left, up to 18 kg (40 lbs.)	1		055.3090.071
	Soft close, right, up to 18 kg (40 lbs.)	1		055.3090.072
	Follower, for soft close, right, plastic, gray	1	1	055.3040.071
	Follower, for soft close, left, plastic, gray	1	1	055.3040.072
	Fillister head screw, 4x16 mm, steel, zinc-plated	6	6	600.0000.166
	Countersunk head screw, 4x30 mm, steel, zinc-plated	4	4	600.0000.439
	Soft close, left, 18–40 kg (40–88 lbs.)		1	055.3090.073
	Soft close, right, 18–40 kg (40–88 lbs.)		1	055.3090.074


#### Adapter soft close for No. 055.3091.071 and 055.3091.073

			No.
Adapter set, for soft close		055.3043.073	
Set consisting	of:	055.3043.073	No.
	Adapter, for soft close, exterior door, steel, zinc-plated	1	055.0133.101
	Adapter, for soft close, interior door, steel, zinc-plated	1	055.0128.101
<b>©</b>	Rounded head screw, M4x8 mm, steel, zinc-plated	6	759.0408.108
	Fillister head screw, 4x16 mm, steel, zinc-plated	8	600.0000.166
$\bigcirc$	Rubber buffer, plastic, grey	1	025.0107.001


#### **Accessories**

	No.
Clip-on component, for wooden panel, every 500 mm (1'7 11/16"), aluminum, pre-drilled	056.3039.001
Door centering, for 2 doors, plastic, anthracite	053.3207.071


#### **Calculations**




# **Door centering**



## Optional: Installation with wooden panel



#### Soft close

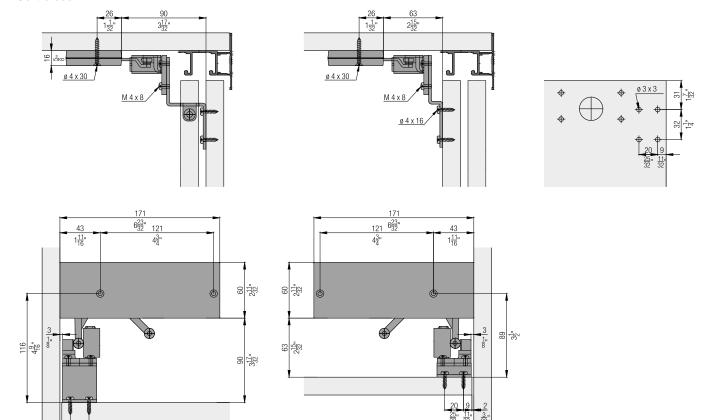

#### **Accessories**

- Straightening fitting from page 265Handle profiles from page 268
- Order overview soft close from page 270

# Planning/execution

Further information about the product can be found on www.hawa.com.