

Fitting for 2 top-running wooden doors up to 20 kg (44 lbs.), with screwed on running track and wooden or aluminum clip panel. Soft close optional. Design Mixslide.

Product highlights




Comfort

High operating convenience thanks to proven running system and optional soft closing technology



Productivity

No cabinet processing, high degree of pre-assembly and access from the front for easy, quick installation

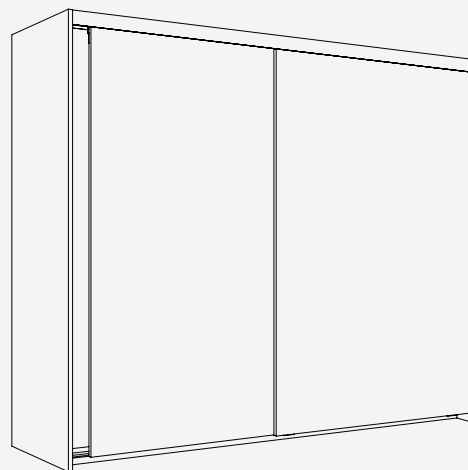

Technical specifications



Max. 20 kg (44 lbs.)



Max. 2200 mm (7'2 5/8")









Max. 1200 mm (3'11 1/4")



19 mm (3/4")








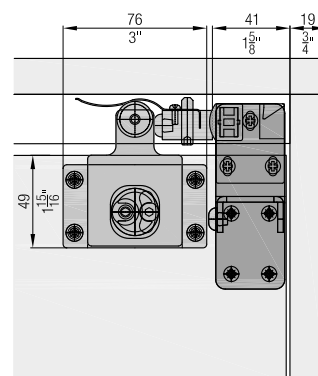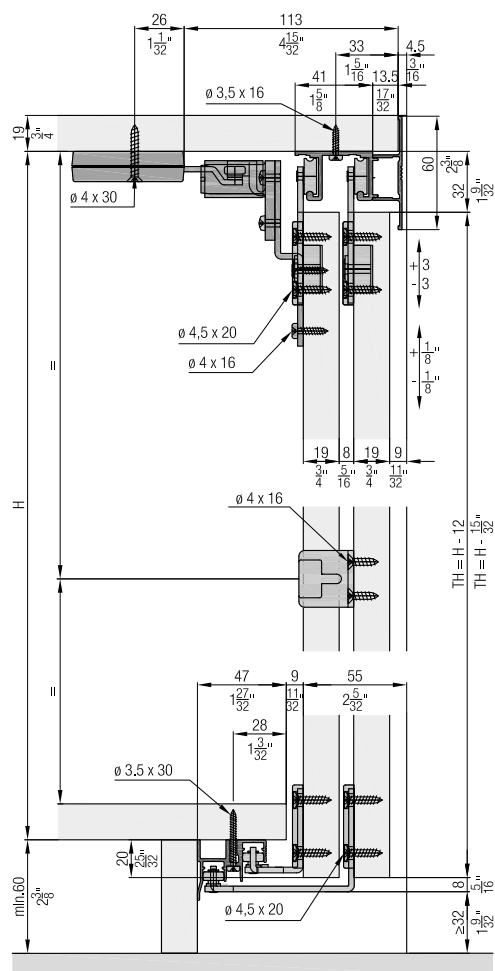


Installation examples





Set for 2 wooden doors

	No.
Hawa Combino 20 H MS, for 2 doors	056.3181.071


Set consisting of:

		056.3181.071	No.
	Running gear, steel, zinc-plated	4	056.3176.171
	Running gear housing, plastic, anthracite	4	056.3175.001
	Guide bracket, interior door, steel, zinc-plated	2	055.3107.171
	Guide bracket, exterior door, steel, zinc-plated	2	055.3108.171
	Guide bracket housing, plastic, anthracite	4	053.3064.001
	Stopper, plastic, gray	2	056.3189.071
	Stopper, with retention spring, plastic, gray	2	056.3189.072
	Stopper guide, plastic, gray	4	040.3079.074
	Door follower, with 2 doors, steel, zinc-plated	1	055.3124.071
	Countersunk head screw, 4.5x20 mm, steel, zinc-plated	32	600.0000.167


Running tracks

		mm (inch)	No.
	Single running track, aluminum, pre-drilled	2500 (8'2 7/16")	056.3011.250
		3500 (11'5 25/32")	056.3011.350
		6000 (19'8 7/32")	056.3011.600
	Double running track, aluminum, pre-drilled	2500 (8'2 7/16")	056.3010.250
		3500 (11'5 25/32")	056.3010.350
		6000 (19'8 7/32")	056.3010.600

Guide tracks

		mm (inch)	No.
	Double guide track, aluminum, anodized, pre-drilled	2500 (8'2 7/16")	056.3072.250
		3500 (11'5 25/32")	056.3072.350
		6000 (19'8 7/32")	056.3072.600

Panels









		mm (inch)	No.
	Clip-on panel, aluminum, anodized	2500 (8'2 7/16")	056.3174.250
		3500 (11'5 25/32")	056.3174.350
		6000 (19'8 7/32")	056.3174.600

Soft close


Adapter soft close must be ordered separately

	No.
Soft close, up to 18 kg (40 lbs.), with wide follower, 2 pieces	055.3091.071
Soft close, 18-40 kg (40-88 lbs.), with wide follower, 2 pieces	055.3091.073

Set consisting of:

	Soft close, left, up to 18 kg (40 lbs.)	1		055.3090.071
	Soft close, right, up to 18 kg (40 lbs.)	1		055.3090.072
	Follower, for soft close, right, plastic, gray	1	1	055.3040.071
	Follower, for soft close, left, plastic, gray	1	1	055.3040.072
	Fillister head screw, 4x16 mm, steel, zinc-plated	6	6	600.0000.166
	Countersunk head screw, 4x30 mm, steel, zinc-plated	4	4	600.0000.439
	Soft close, left, 18–40 kg (40–88 lbs.)		1	055.3090.073
	Soft close, right, 18–40 kg (40–88 lbs.)		1	055.3090.074



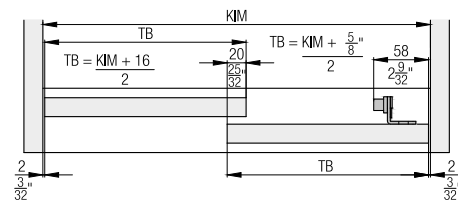


Calculations




Adapter soft close for No. 055.3091.071 and 055.3091.073

	No.
Adapter set, for soft close	055.3043.073


Set consisting of:

	Adapter, for soft close, exterior door, steel, zinc-plated	1	055.0133.101
	Adapter, for soft close, interior door, steel, zinc-plated	1	055.0128.101
	Rounded head screw, M4x8 mm, steel, zinc-plated	6	759.0408.108
	Fillister head screw, 4x16 mm, steel, zinc-plated	8	600.0000.166
	Rubber buffer, plastic, grey	1	025.0107.001


Accessories

		No.
	Clip-on component, for wooden panel, every 500 mm (1'7 11/16"), aluminum, pre-drilled	056.3039.001

Optional: Installation with wooden panel

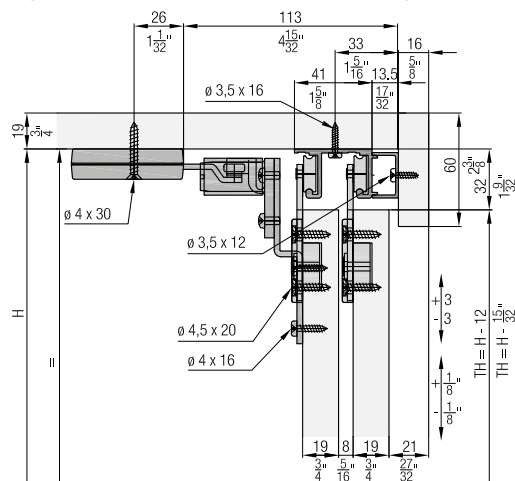

Soft close

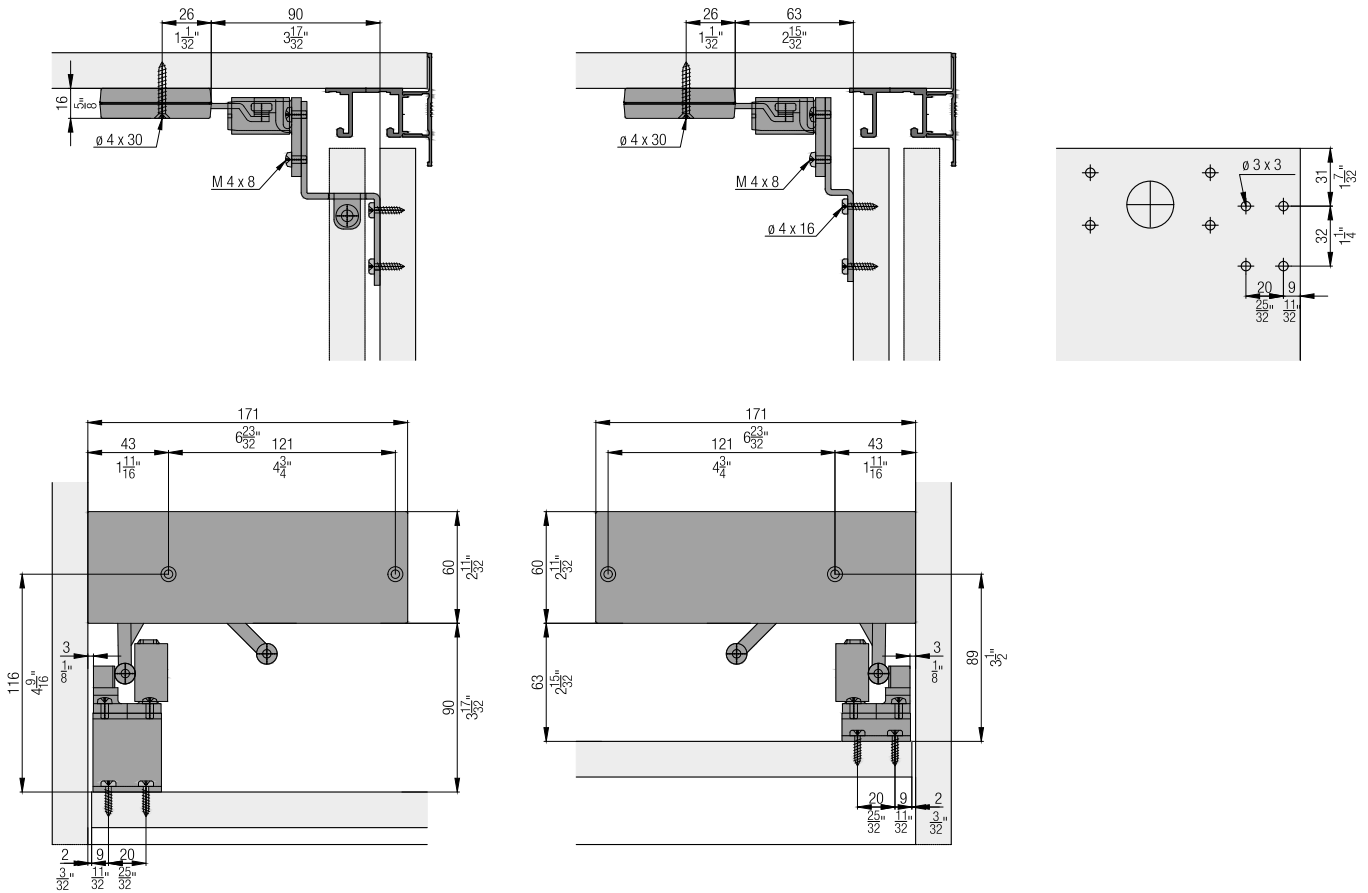

Accessories

- Straightening fitting from page 265
- Handle profiles from page 268
- Order overview soft close from page 270

Planning/execution

Further information about the product can be found on www.hawa.com.