

Fitting for 2-3 top-running wooden doors up to 35 kg (77 lbs.), with screwed on running track and wooden or aluminum clip panel. Soft close optional. Design Inside.

Product highlights



Comfort

High operating convenience thanks to proven running system and optional soft closing technology



Productivity

No cabinet processing, high degree of pre-assembly and access from the front for easy, quick installation

Technical specifications



Max. 35 kg (77 lbs.)




Max. 2200 mm (7'2 5/8")








Max. 1200 mm (3'11 1/4")



19 mm (3/4")

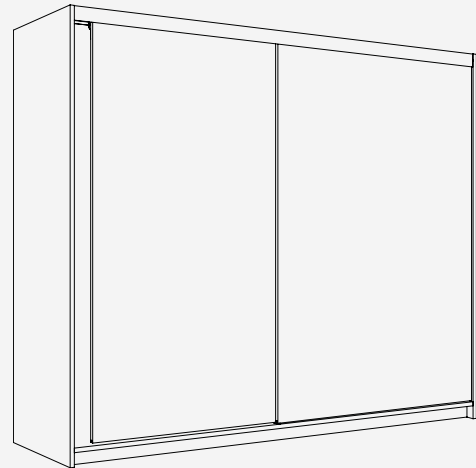

Installation examples

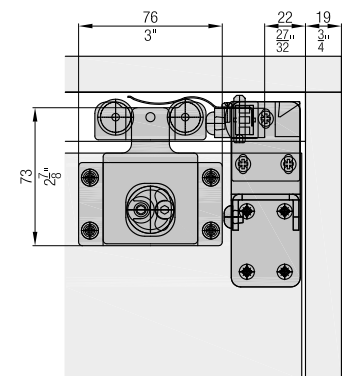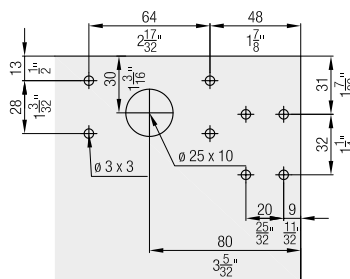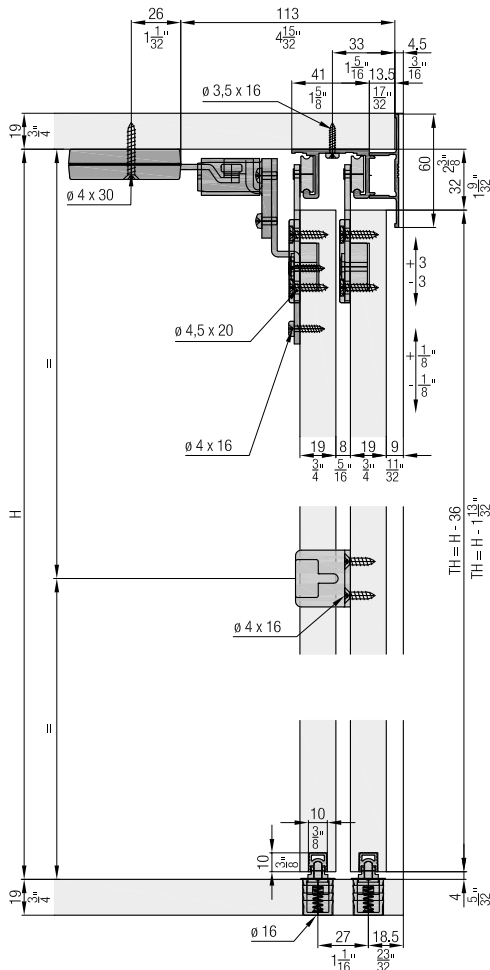



Set for 2 or 3 wooden doors

	No.
Hawa Combino 35 H IS, for 2 doors	056.3180.073
Hawa Combino 35 H IS, for 3 doors	056.3180.077


Set consisting of:

		056.3180.073	056.3180.077	No.
	Running gear, steel, zinc-plated	4	6	056.3177.171
	Running gear housing, plastic, anthracite	4	6	056.3175.001
	Bottom guide, plastic, gray	2	3	055.3081.071
	Stopper, plastic, gray	2	1	056.3189.071
	Stopper, with retention spring, plastic, gray	2	3	056.3189.072
	Door follower, with 2 doors, steel, zinc-plated	1		055.3124.071
	Countersunk head screw, 4.5x20 mm, steel, zinc-plated	16	24	600.0000.167
	Buffer, with adhesive, 3-piece set		1	061.3083.050


Running tracks

		mm (inch)	No.
	Single running track, aluminum, pre-drilled	2500 (8'2 7/16")	056.3011.250
		3500 (11'5 25/32")	056.3011.350
		6000 (19'8 7/32")	056.3011.600
	Double running track, aluminum, pre-drilled	2500 (8'2 7/16")	056.3010.250
		3500 (11'5 25/32")	056.3010.350
		6000 (19'8 7/32")	056.3010.600

Guide tracks

		mm (inch)	No.
	Guide track, plastic, gray, for glue fixing	2500 (8'2 7/16")	055.3171.250
		3500 (11'5 25/32")	055.3171.350
		6000 (19'8 7/32")	055.3171.600

Panels







		mm (inch)	No.
	Clip-on panel, aluminum, anodized	2500 (8'2 7/16")	056.3174.250
		3500 (11'5 25/32")	056.3174.350
		6000 (19'8 7/32")	056.3174.600

Soft close (only for system with 2 doors)

Adapter soft close must be ordered separately

	No.
Soft close, 18–40 kg (40–88 lbs.), with wide follower, 2 pieces	055.3091.073






Set consisting of:

		055.3091.073	No.
	Soft close, left, 18–40 kg (40–88 lbs.)	1	055.3090.073
	Soft close, right, 18–40 kg (40–88 lbs.)	1	055.3090.074
	Follower, for soft close, right, plastic, gray	1	055.3040.071
	Follower, for soft close, left, plastic, gray	1	055.3040.072
	Fillister head screw, 4x16 mm, steel, zinc-plated	6	600.0000.166
	Countersunk head screw, 4x30 mm, steel, zinc-plated	4	600.0000.439



Adapter soft close for No. 055.3091.073

	No.
Adapter set, for soft close	055.3043.073


Set consisting of:

		055.3043.073	No.
	Adapter, for soft close, exterior door, steel, zinc-plated	1	055.0133.101
	Adapter, for soft close, interior door, steel, zinc-plated	1	055.0128.101
	Rounded head screw, M4x8 mm, steel, zinc-plated	6	759.0408.108
	Fillister head screw, 4x16 mm, steel, zinc-plated	8	600.0000.166
	Rubber buffer, plastic, grey	1	025.0107.001


Accessories

		No.
	Clip-on component, for wooden panel, every 500 mm (1'7 11/16"), aluminum, pre-drilled	056.3039.001
	Door centering, for 2 doors, plastic, anthracite	053.3207.071


Calculations

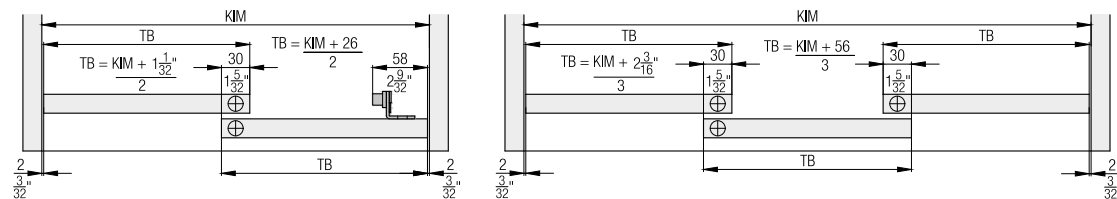


Door centering

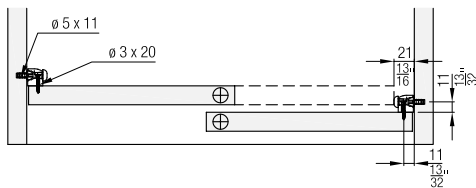

Optional: Installation with wooden panel

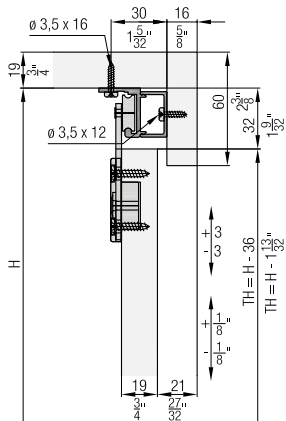

Soft close (only for system with 2 doors)

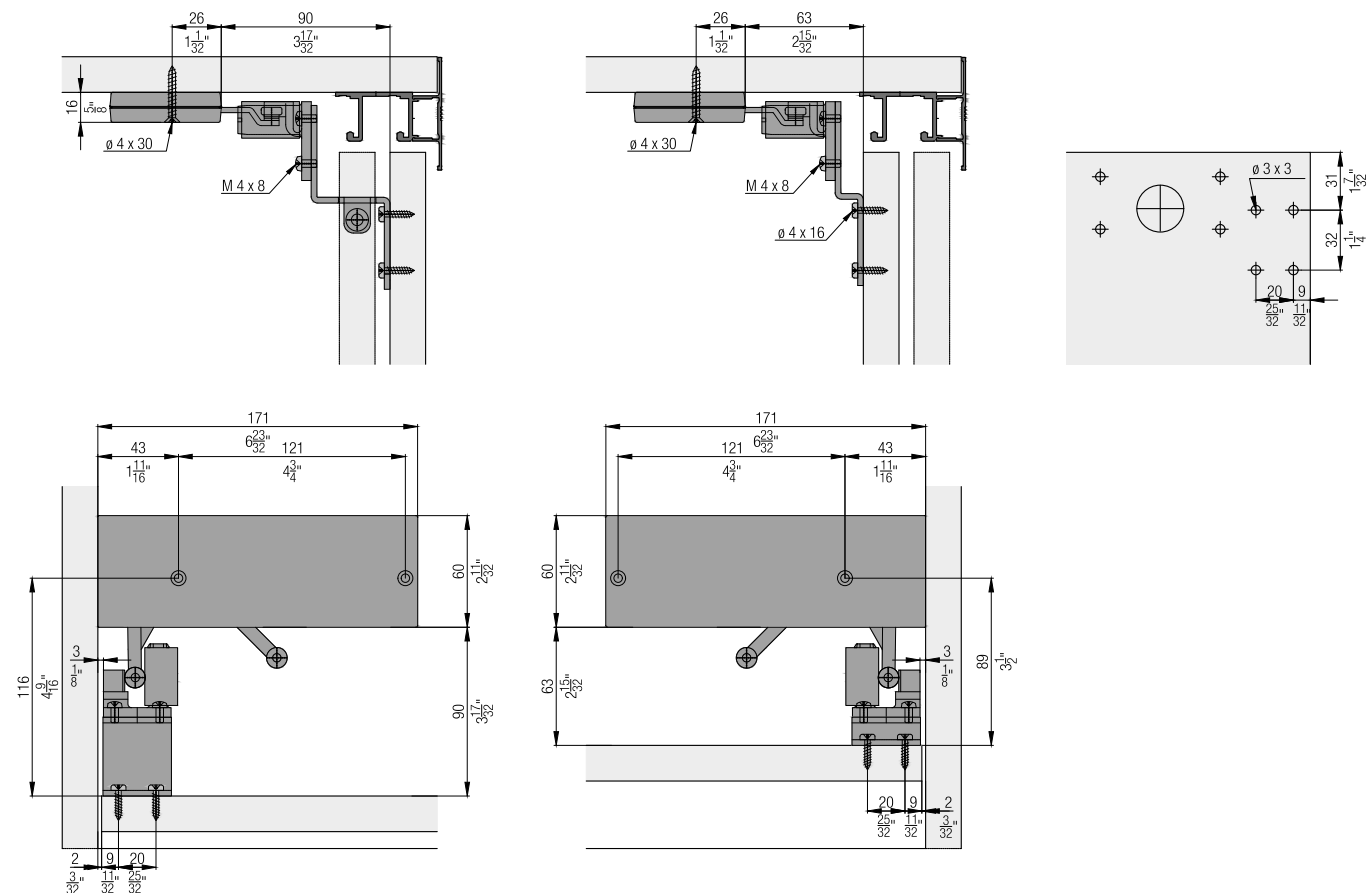

Accessories

- Straightening fitting from page 265
- Handle profiles from page 268
- Order overview soft close from page 270

Planning/execution

Further information about the product can be found on www.hawa.com.