




Fitting for top-running glass doors up to 100 kg (220 lbs.), with surface mounted running track. Optionally with soft and self closing mechanism. Wall or ceiling mounting.

Product highlights


-  **Flexibility** Ceiling mounting with integrated clip-on panel in aluminum or wood
-  **Productivity** Multi-track guide and running tracks reduce installation cost

Technical specifications


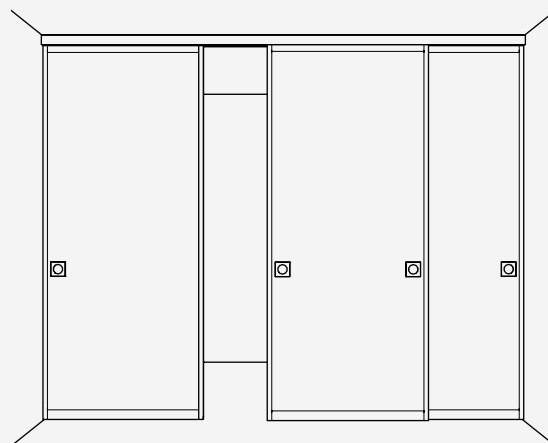






-  Max. 100 kg (220 lbs.)
-  Max. 2750 mm (9' 9/32")
-  Max. 1200 mm (3' 11 1/4")
-  30 mm (1 3/16")
(5.9–10 mm (7/32" to 13/32"))

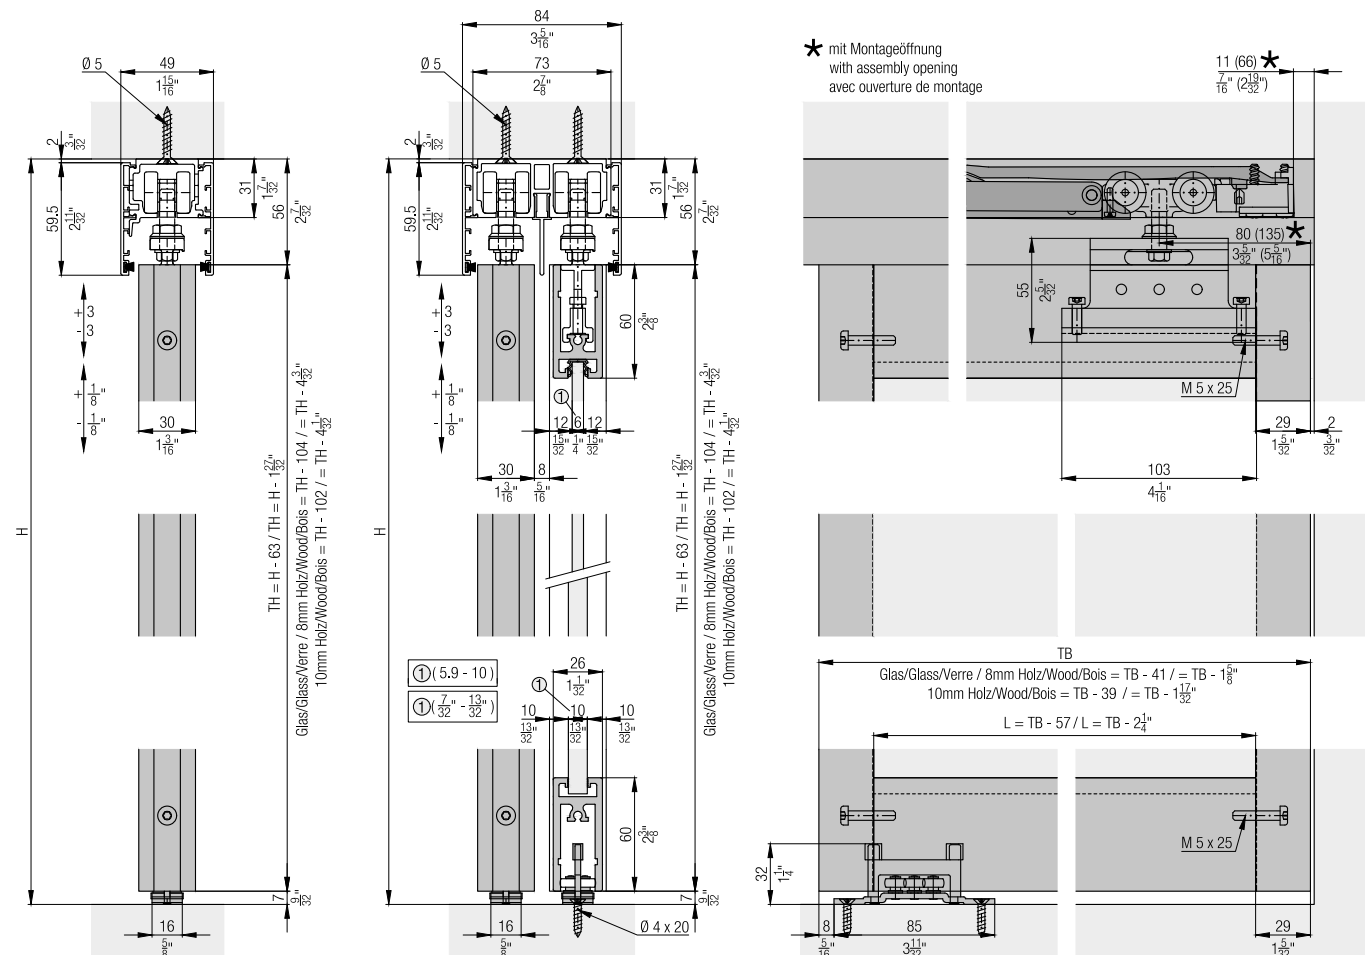

Installation examples






Set for 1 aluminum frame door up to 100 kg (220 lbs.)

		No.
Hawa Divido 100 GR, for 1 door		042.3025.071
		No.
Set consisting of:		042.3025.071
	Running gear, ball bearing, rollers plastic white	2 057.3114.071
	Stopper, with retention spring, plastic, gray	2 057.3073.072
	Suspension bolt, M8x32 mm (5/16"x1 1/4"), steel, zinc-plated	2 057.0123.104
	Hexagon locking nut, M8, steel, zinc-plated	2 768.9005.101
	Running gear support, aluminum	2 042.3006.071
	Hexalobular pan head thread forming screw, M5x25 mm (3/16"x31/32"), steel, zinc-plated	8 600.0000.174
	Bottom guide, steel, zinc-plated	1 042.3016.171
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated	2 766.5042.120


Running tracks

		mm (inch)	No.
	Combi running track, aluminum, pre-drilled	2,500 (8' 2 7/16")	057.3048.250
		3,500 (11' 5 25/32")	057.3048.350
		6,000 (19' 8 7/32")	057.3048.600
		cut to size	057.3048.990
	Spacer track, for wall mounting, plastic, gray	2,000 (6' 6 3/4")	057.3054.200
		cut to size	057.3054.990
	Double running track, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	042.3002.250
		3,500 (11' 5 25/32")	042.3002.350
		6,000 (19' 8 7/32")	042.3002.600
		cut to size	042.3002.990
	Triple running track, aluminum, anodized, pre-drilled	6,000 (19' 8 7/32")	042.3084.600
		cut to size	042.3084.990
	Disposable cover to running track Hawa Divido 100 / Hawa Porta 45/60/100, plastic, black	2,000 (6' 6 3/4")	057.3098.001
		cut to size	057.3098.990





Panels

		mm (inch)	No.
	Clip-on panel, aluminum, anodized	2,500 (8' 2 7/16")	042.3004.250
		3,500 (11' 5 25/32")	042.3004.350
		6,000 (19' 8 7/32")	042.3004.600
		cut to size	042.3004.990
	Intermediate panel for 042.3002./042.3084., aluminum, anodized	6,000 (19' 8 7/32")	042.3003.600
		cut to size	042.3003.990
	Brush seal, gray, in rolls	10,000 (32' 9 11/16")	053.3040.100



Clip-on components

	No.
 <p>Clip component for wooden and aluminum panel, every 500 mm (1' 7 11/16"), aluminium, pre-drilled</p>	057.3117.001



Frame profiles

		mm (inch)	No.
	Frame profile horizontal, aluminum, anodized	2,500 (8' 2 7/16")	042.3000.250
		6,000 (19' 8 7/32")	042.3000.600
		cut to size	042.3000.990
	Frame profile vertical, aluminum, anodized	2,500 (8' 2 7/16")	042.3001.250
		6,000 (19' 8 7/32")	042.3001.600
		cut to size	042.3001.990
	Frame profile, with handle, vertical, aluminum, anodized	2,500 (8' 2 7/16")	042.3083.250
		6,000 (19' 8 7/32")	042.3083.600
		cut to size	042.3083.990
	Frame profile for front subdivision, aluminum, anodized	2,500 (8' 2 7/16")	042.3007.250
		cut to size	042.3007.990


Glass retaining profiles

		mm (inch)	No.
	Glass retaining profile, glass thickness 6 mm (1/4"), with trimmed edge, plastic, transparent	20,000 (65' 7 13/32")	042.3021.002
	Glass retaining profile, glass thickness 5.9–6.4 mm (1/4"), with grounded edge, plastic, transparent	20,000 (65' 7 13/32")	042.3079.002

Leading edge frame profiles

		mm (inch)	No.
	Front edge profile for 057.3084./042.3001./042.3083., aluminum, anodized	2,500 (8' 2 7/16")	042.3005.250
		3,000 (9' 10 1/8")	042.3005.300
		6,000 (19' 8 7/32")	042.3005.600
		cut to size	042.3005.990
	Sealing profile, plastic, gray, in rolls	10,000 (32' 9 11/16")	042.3010.002





Screw set for frame bar

	No.
 <p>Screw set for frame rung 042.3007., aluminum frame system, 4-pieces set</p>	099.0031.999

Soft close

For soft closing in opening and closing direction order 2 sets.


	No.
Soft close Hawa Porta 100, Divido 100, 61–100 kg (133 to 220 lbs.), 1 piece	042.3102.071
Soft close Hawa Porta 60/100, Divido 100, 10–60 kg (22 to 132 lbs.), 1 piece	042.3102.072

		042.3102.071	042.3102.072	No.
Set consisting of:				
	Soft close, top running, 61–100 kg (133 to 220 lbs.), plastic	1		042.3106.071
	Trigger for soft close in buildings, zinc die casting	1	1	042.3105.001
	Screw set soft close	1	1	600.0000.566
	Soft close, top running, 10–60 kg (22 to 132 lbs.), plastic		1	042.3106.072

Cover for assembly opening

	No.
Cover cap to assembly opening, 1-piece set	042.3114.071


Set consisting of:

	Cover cap assembly opening, plastic, gray	1	042.0172.001
	Screw set soft close	1	600.0000.566

Panel end component set, 49 mm (1 15/16"), aluminum, ceiling mounting

	No.
Panel end component set for 057.3048., 49x60 mm (1 15/16x2 3/8"), aluminum, anodized, for ceiling mounting	042.3028.071


Set consisting of:

	Panel end component, 49 mm (1 15/16"), aluminum, anodized	1	042.3028.901
	Bracker connector, steel, zinc-plated	2	057.3051.101
	Screw, M4x2.6 mm (5/32"x 1/8"), steel, zinc-plated	4	011.0101.171


Panel end component set, 51 mm (2"), aluminum, wall mounting

	No.
Panel end component set for 057.3048., 51x60 mm (2"x2 3/8"), aluminum, anodized, for wall mounting	042.3028.075







Set consisting of:

	Panel end component, 51 mm (2"), aluminum, anodized	1	042.3028.905
	Bracker connector, steel, zinc-plated	2	057.3051.101
	Screw, M4x2.6 mm (5/32"x 1/8"), steel, zinc-plated	4	011.0101.171


Wall compensation profiles

	mm (inch)	No.
	2,500 (8' 2 7/16")	042.3064.071
	3,000 (9' 10 1/8")	042.3064.072


Accessories

	No.
	042.3045.001
	042.3047.002
	042.3118.071
	600.0000.309
	057.3099.071
	098.0027.000


Further installation examples

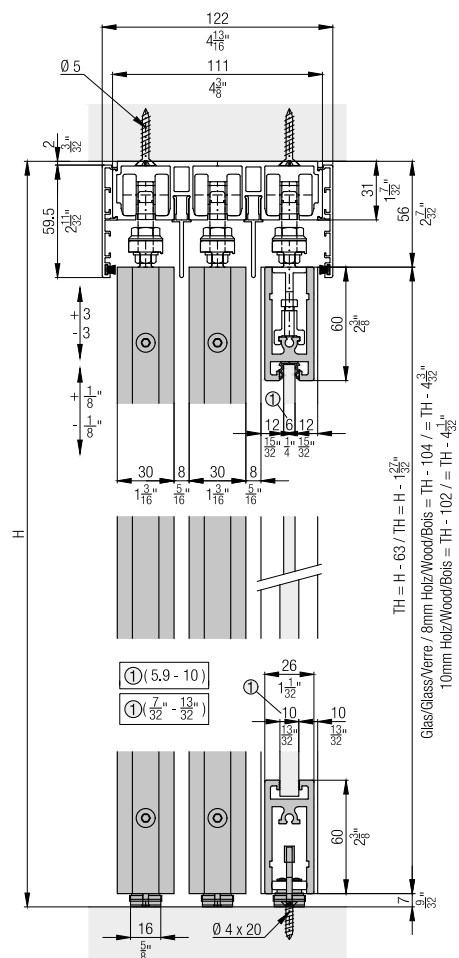


Installation examples wooden panel

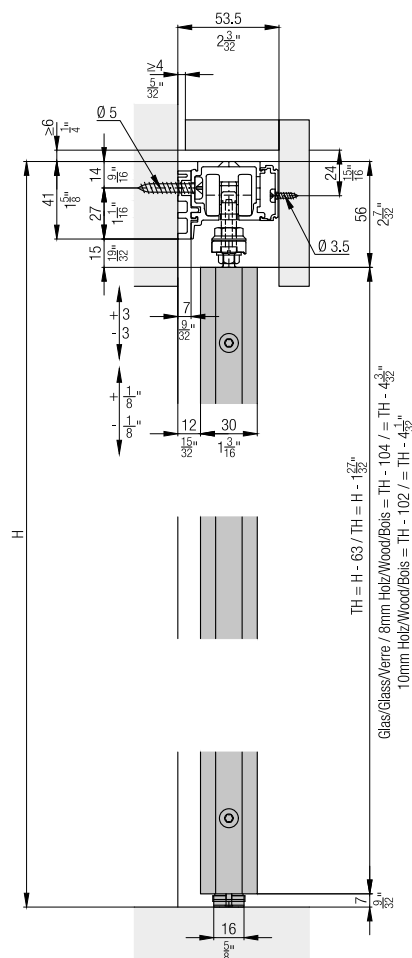


Calculations

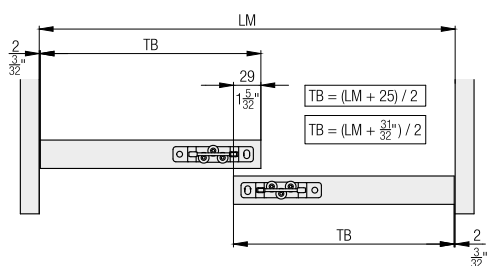


Calculations of clip-on panels

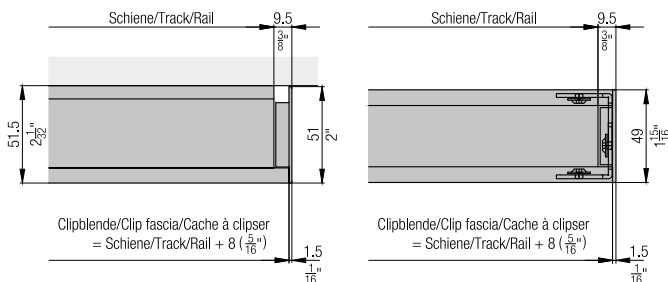


Cross sections of profiles with panels

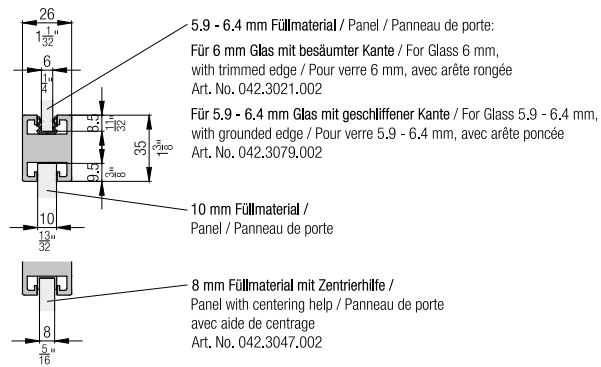

Top-down view of doors

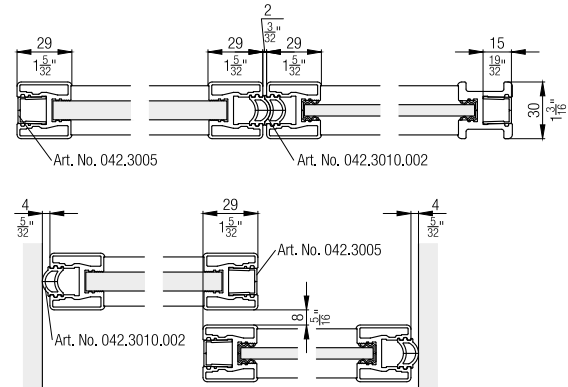

Wall compensation profile



Soft close

[illegible]

≥ 62
 $\geq 2\frac{1}{16}"$

	Z =					
	1			2		
	0	1	2	0	1	2
Hawa Porta 60/100 H/HC	1' 6 $\frac{29}{32}$	1' 9 $\frac{1}{16}$	1' 11 $\frac{1}{4}$	2' 4 $\frac{3}{4}$	2' 6 $\frac{29}{32}$	2' 9 $\frac{3}{32}$
Hawa Porta 60/100 HM/HMD/HMT	1' 6 $\frac{29}{32}$	1' 9 $\frac{1}{16}$	1' 11 $\frac{1}{4}$	2' 4 $\frac{3}{4}$	2' 6 $\frac{29}{32}$	2' 9 $\frac{3}{32}$
Hawa Porta 100 G/GU/GM/GMT	1' 6 $\frac{29}{32}$	1' 9 $\frac{1}{16}$	1' 11 $\frac{1}{4}$	2' 4 $\frac{3}{4}$	2' 6 $\frac{29}{32}$	2' 9 $\frac{3}{32}$
Hawa Porta 100 GF	1' 6 $\frac{29}{32}$			2' 4 $\frac{3}{4}$		
Hawa Porta 100 GW/GWF	1' 8 $\frac{5}{32}$	1' 9 $\frac{11}{32}$	1' 11 $\frac{1}{4}$	2' 6"	2' 6 $\frac{29}{32}$	2' 7 $\frac{3}{16}$
Hawa Porta 100 GMD	1' 7 $\frac{7}{32}$	1' 9 $\frac{1}{32}$	1' 11 $\frac{1}{4}$	2' 5 $\frac{1}{16}$	2' 7 $\frac{1}{16}$	2' 7 $\frac{3}{16}$
Hawa Divido 100 H/HM/GR	1' 6 $\frac{29}{32}$	1' 9 $\frac{1}{16}$	1' 11 $\frac{1}{4}$	2' 4 $\frac{3}{4}$	2' 6 $\frac{29}{32}$	2' 9 $\frac{3}{32}$
Hawa Divido 100 GRM	1' 8 $\frac{5}{32}$	1' 10 $\frac{11}{32}$	1' 10 $\frac{1}{2}$	2' 6"	2' 8 $\frac{5}{32}$	2' 10 $\frac{11}{32}$

≥ 62
 $\geq 2\frac{1}{16}"$

≥ 320
 $\geq 1' \frac{19}{32}"$
 $Z = \geq 480$
 $Z = \geq 1' \frac{29}{32}"$

	Z =					
	1			2		
	0	1	2	0	1	2
Hawa Porta 60/100 H/HC	480	535	590	730	785	840
Hawa Porta 60/100 HM/HMD/HMT	480	535	590	730	785	840
Hawa Porta 100 G/GU/GM/GMT	480	535	590	730	785	840
Hawa Porta 100 GF	480			730		
Hawa Porta 100 GW/GWF	512	542	590	762	792	840
Hawa Porta 100 GMD	488	539	590	738	789	840
Hawa Divido 100 H/HM/GR	480	535	590	730	785	840
Hawa Divido 100 GRM	512	567	622	762	817	872

≥ 62
 $\geq 2\frac{1}{16}"$

≥ 570
 $\geq 1' \frac{10}{16}"$
 $Z = \geq 730$
 $Z = \geq 2' \frac{43}{32}"$

≥ 62
 $\geq 2\frac{1}{16}"$

* Montageöffnung
 assembly opening
 ouverture de montage

Accessories

- Hawa 4-point guidance from page 521
- Hawa Divido overview from page 535
- Hawa Divido GR door weight calculations from page 537
- Glass recommendations from page 536

Planning/execution

Further information about the product can be found on www.hawa.com.