

Fitting for top-running glass doors up to 100 kg (220 lbs.), with surface mounted running track. Optionally with soft and self closing mechanism. Wall or ceiling mounting.

Product highlights



Flexibility

Ceiling mounting with integrated clip-on panel in aluminum or wood



Productivity

Multi-track guide and running tracks reduce installation cost

Technical specifications



Max. 100 kg (220 lbs.)



Max. 2750 mm (9' 9/32")




Max. 1200 mm (3' 11 1/4")




30 mm (1 3/16")
(5.9–10 mm (7/32" to 13/32"))



Installation examples

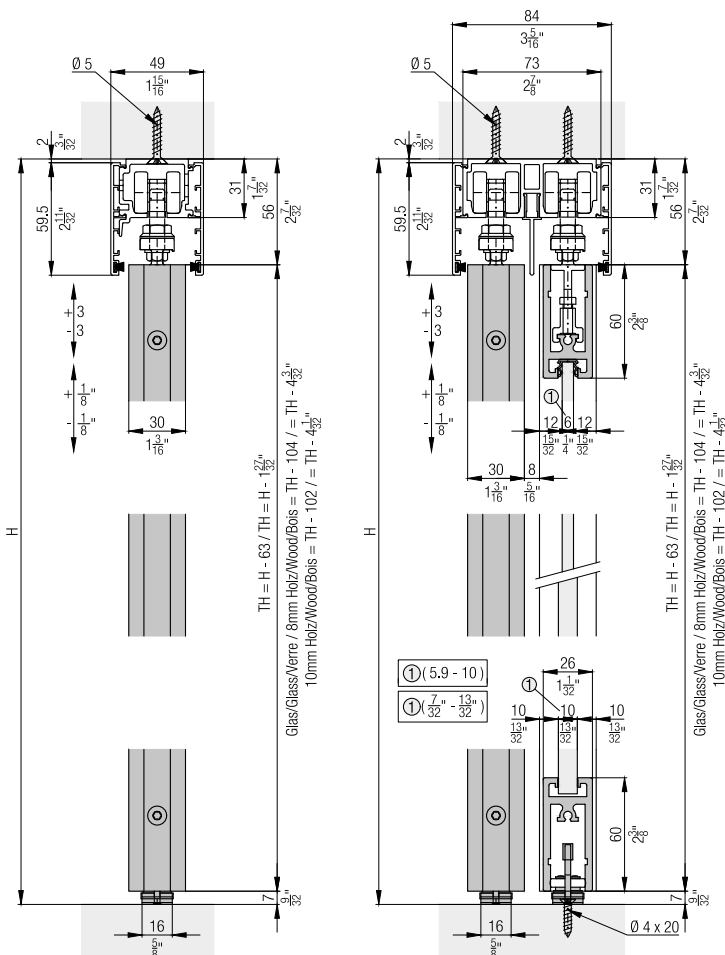


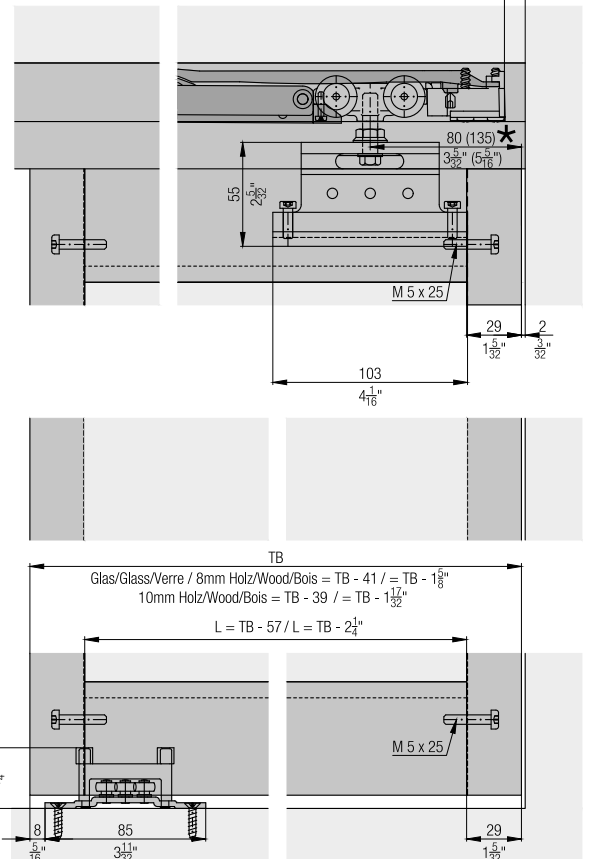






★ mit Montageöffnung
with assembly opening
avec ouverture de montage



Set for 1 aluminum frame door up to 100 kg (220 lbs.)

	No.
Hawa Divido 100 GR, for 1 door	042.3025.071




Set consisting of:

		042.3025.071	No.
	Running gear, ball bearing, rollers plastic white	2	057.3114.071
	Stopper, with retention spring, plastic, gray	2	057.3073.072
	Suspension bolt, M8x32 mm (5/16"x1 1/4"), steel, zinc-plated	2	057.0123.104
	Hexagon locking nut, M8, steel, zinc-plated	2	768.9005.101
	Running gear support, aluminum	2	042.3006.071
	Hexalobular pan head thread forming screw, M5x25 mm (3/16"x31/32"), steel, zinc-plated	8	600.0000.174
	Bottom guide, steel, zinc-plated	1	042.3016.171
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated	2	766.5042.120


Running tracks

		mm (inch)	No.
	Combi running track, aluminum, pre-drilled	2,500 (8' 2 7/16")	057.3048.250
		3,500 (11' 5 25/32")	057.3048.350
		6,000 (19' 8 7/32")	057.3048.600
		cut to size	057.3048.990
	Spacer track, for wall mounting, plastic, gray	2,000 (6' 6 3/4")	057.3054.200
		cut to size	057.3054.990
	Double running track, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	042.3002.250
		3,500 (11' 5 25/32")	042.3002.350
		6,000 (19' 8 7/32")	042.3002.600
		cut to size	042.3002.990
	Triple running track, aluminum, anodized, pre-drilled	6,000 (19' 8 7/32")	042.3084.600
		cut to size	042.3084.990
	Disposable cover to running track Hawa Divido 100 / Hawa Porta 45/60/100, plastic, black	2,000 (6' 6 3/4")	057.3098.001
		cut to size	057.3098.990





Panels

		mm (inch)	No.
	Clip-on panel, aluminum, anodized	2,500 (8' 2 7/16")	042.3004.250
		3,500 (11' 5 25/32")	042.3004.350
		6,000 (19' 8 7/32")	042.3004.600
		cut to size	042.3004.990
	Intermediate panel for 042.3002./042.3084., aluminum, anodized	6,000 (19' 8 7/32")	042.3003.600
		cut to size	042.3003.990
	Brush seal, gray, in rolls	10,000 (32' 9 11/16")	053.3040.100



Clip-on components

	No.
 <p>Clip component for wooden and aluminum panel, every 500 mm (1' 7 11/16"), aluminium, pre-drilled</p>	057.3117.001



Frame profiles

		mm (inch)	No.
	Frame profile horizontal, aluminum, anodized	2,500 (8' 2 7/16")	042.3000.250
		6,000 (19' 8 7/32")	042.3000.600
		cut to size	042.3000.990
	Frame profile vertical, aluminum, anodized	2,500 (8' 2 7/16")	042.3001.250
		6,000 (19' 8 7/32")	042.3001.600
		cut to size	042.3001.990
	Frame profile, with handle, vertical, aluminum, anodized	2,500 (8' 2 7/16")	042.3083.250
		6,000 (19' 8 7/32")	042.3083.600
		cut to size	042.3083.990
	Frame profile for front subdivision, aluminum, anodized	2,500 (8' 2 7/16")	042.3007.250
		cut to size	042.3007.990


Glass retaining profiles

		mm (inch)	No.
	Glass retaining profile, glass thickness 6 mm (1/4"), with trimmed edge, plastic, transparent	20,000 (65' 7 13/32")	042.3021.002
	Glass retaining profile, glass thickness 5.9–6.4 mm (1/4"), with grounded edge, plastic, transparent	20,000 (65' 7 13/32")	042.3079.002

Leading edge frame profiles

		mm (inch)	No.
	Front edge profile for 057.3084./042.3001./042.3083., aluminum, anodized	2,500 (8' 2 7/16")	042.3005.250
		3,000 (9' 10 1/8")	042.3005.300
		6,000 (19' 8 7/32")	042.3005.600
		cut to size	042.3005.990
	Sealing profile, plastic, gray, in rolls	10,000 (32' 9 11/16")	042.3010.002





Screw set for frame bar

	No.
 <p>Screw set for frame rung 042.3007., aluminum frame system, 4-pieces set</p>	099.0031.999

Soft close

For soft closing in opening and closing direction order 2 sets.


	No.
Soft close Hawa Porta 100, Divido 100, 61–100 kg (133 to 220 lbs.), 1 piece	042.3102.071
Soft close Hawa Porta 60/100, Divido 100, 10–60 kg (22 to 132 lbs.), 1 piece	042.3102.072

		042.3102.071	042.3102.072	No.
Set consisting of:				
	Soft close, top running, 61–100 kg (133 to 220 lbs.), plastic	1		042.3106.071
	Trigger for soft close in buildings, zinc die casting	1	1	042.3105.001
	Screw set soft close	1	1	600.0000.566
	Soft close, top running, 10–60 kg (22 to 132 lbs.), plastic		1	042.3106.072

Cover for assembly opening

	No.
Cover cap to assembly opening, 1-piece set	042.3114.071


Set consisting of:

	Cover cap assembly opening, plastic, gray	1	042.0172.001
	Screw set soft close	1	600.0000.566

Panel end component set, 49 mm (1 15/16"), aluminum, ceiling mounting

	No.
Panel end component set for 057.3048., 49x60 mm (1 15/16x2 3/8"), aluminum, anodized, for ceiling mounting	042.3028.071


Set consisting of:

	Panel end component, 49 mm (1 15/16"), aluminum, anodized	1	042.3028.901
	Bracker connector, steel, zinc-plated	2	057.3051.101
	Screw, M4x2.6 mm (5/32"x 1/8"), steel, zinc-plated	4	011.0101.171


Panel end component set, 51 mm (2"), aluminum, wall mounting

	No.
Panel end component set for 057.3048., 51x60 mm (2"x2 3/8"), aluminum, anodized, for wall mounting	042.3028.075







Set consisting of:

	Panel end component, 51 mm (2"), aluminum, anodized	1	042.3028.905
	Bracker connector, steel, zinc-plated	2	057.3051.101
	Screw, M4x2.6 mm (5/32"x 1/8"), steel, zinc-plated	4	011.0101.171


Wall compensation profiles

	mm (inch)	No.
	2,500 (8' 2 7/16")	042.3064.071
	3,000 (9' 10 1/8")	042.3064.072


Accessories

	No.
	042.3045.001
	042.3047.002
	042.3118.071
	600.0000.309
	057.3099.071
	098.0027.000


Further installation examples

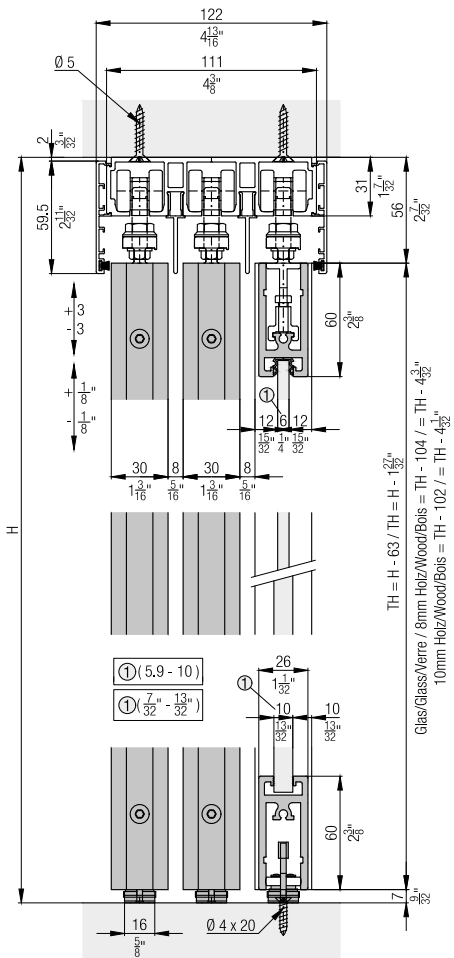


Installation examples wooden panel

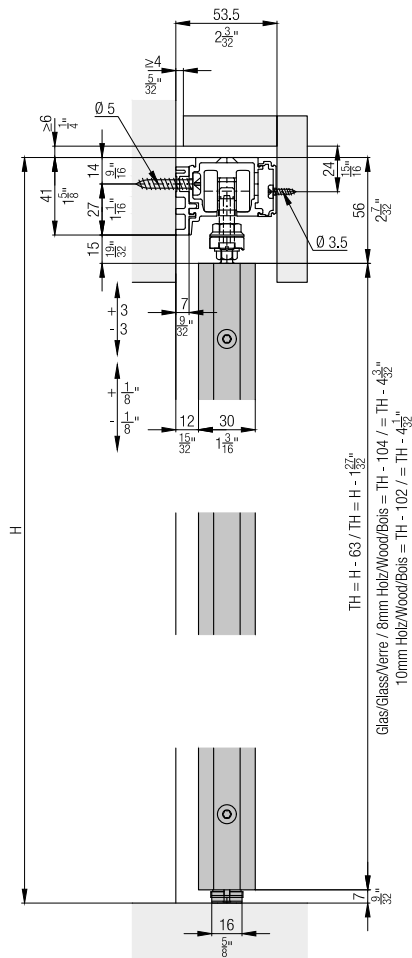


Calculations

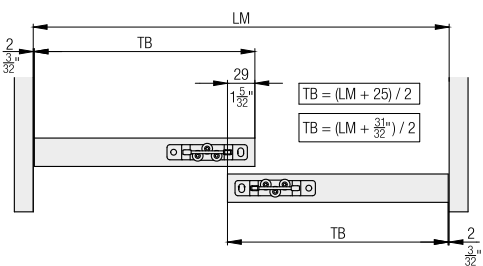


Calculations of clip-on panels

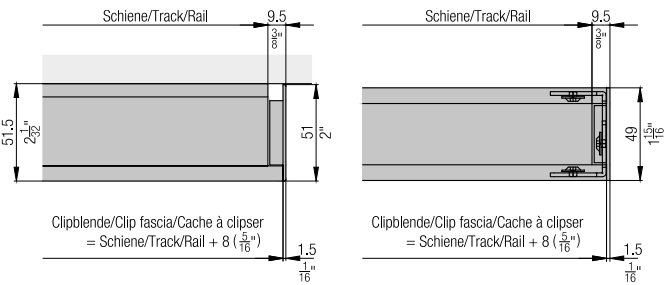


Cross sections of profiles with panels

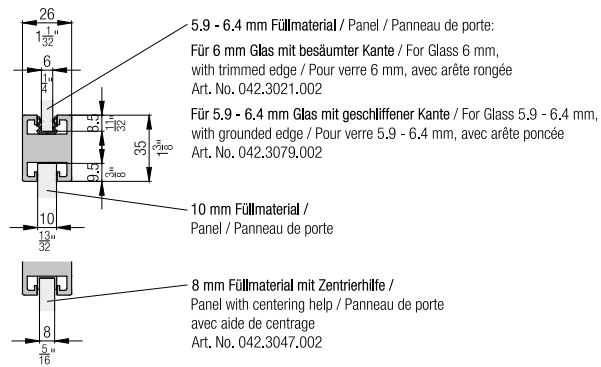



Top-down view of doors

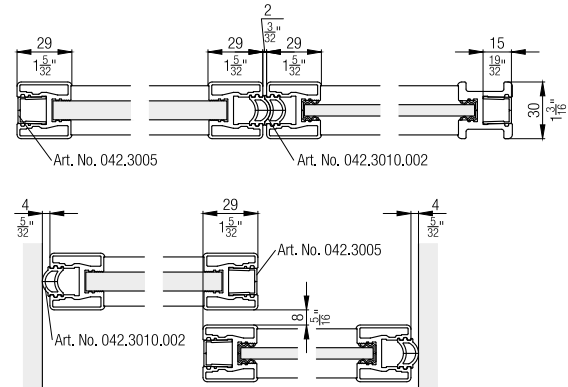

Wall compensation profile



Soft close

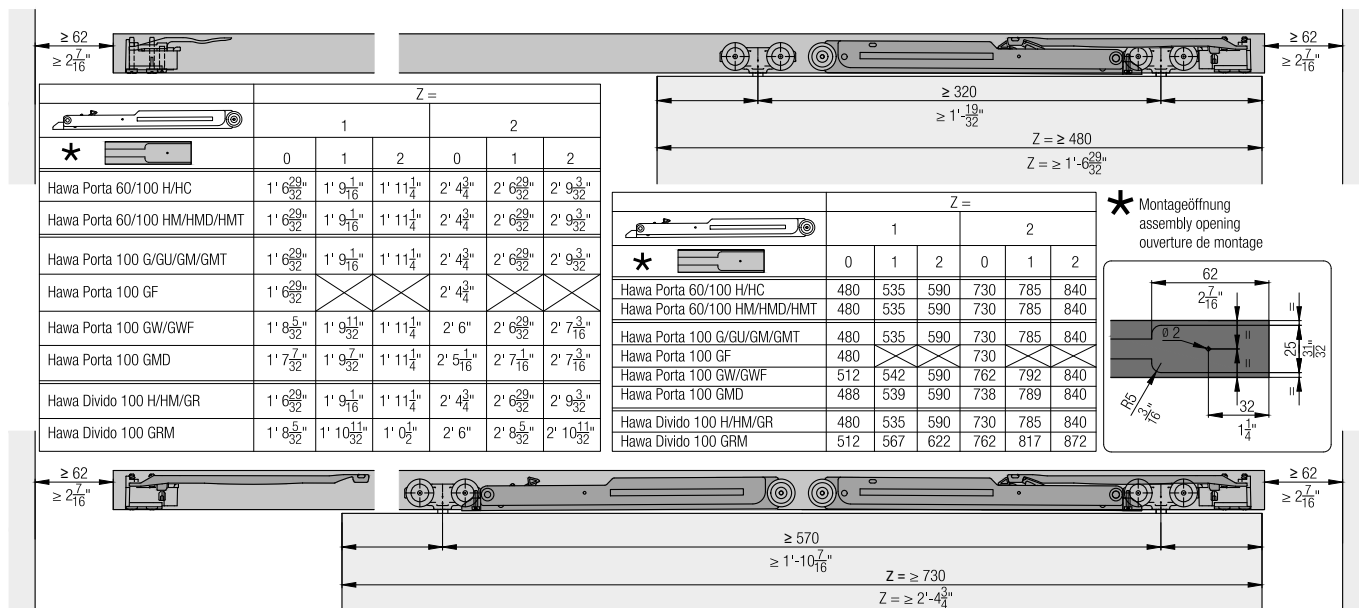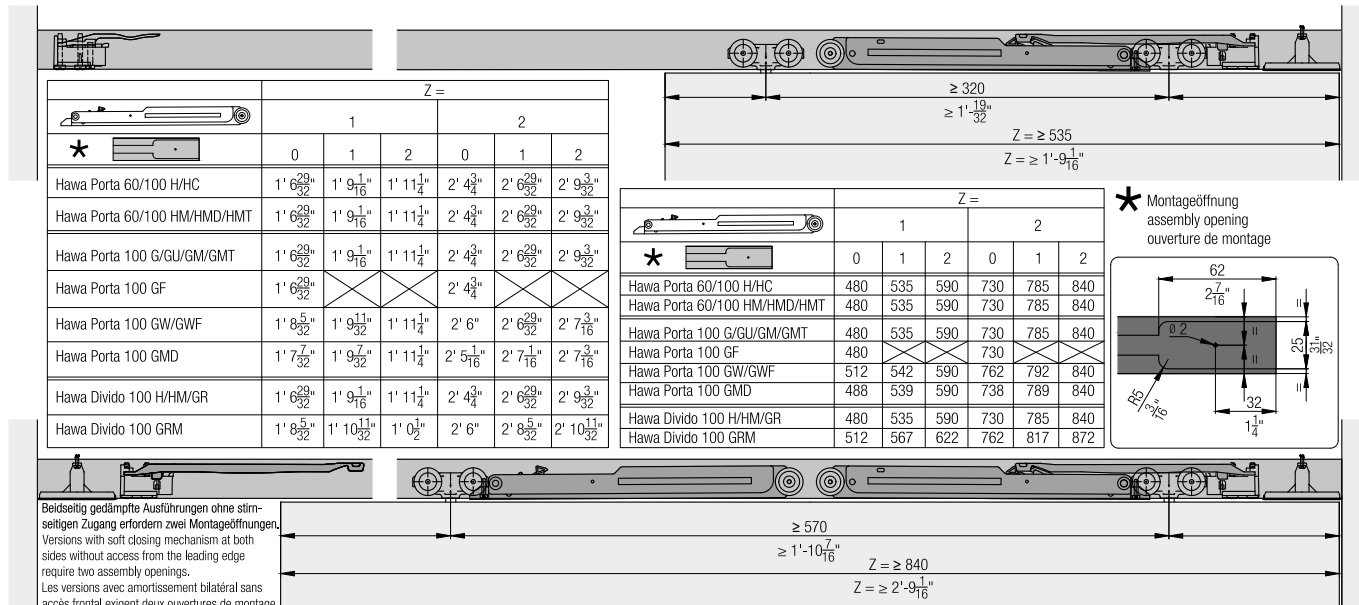

Accessories

- Hawa 4-point guidance from page 521
- Hawa Divido overview from page 535
- Hawa Divido GR door weight calculations from page 537
- Glass recommendations from page 536

Planning/execution

Further information about the product can be found on www.hawa.com.