




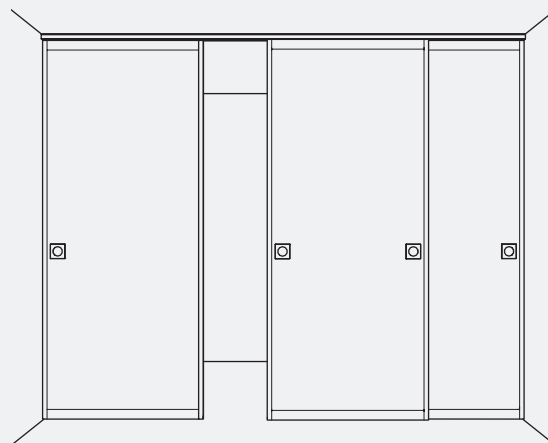
Fitting for top-running glass doors up to 100 kg (220 lbs.), with surface mounted running track. With soft and self closing mechanism. Ceiling mounting.

Product highlights



-  **Flexibility** Ceiling-integrated or surface-mounted installation with the same system
-  **Aesthetics** Stylish aluminum frame solution with minimal installation height

Technical specifications

-  Max. 100 kg (220 lbs.)
-  Max. 2750 mm (9' 9/32")
-  Max. 1200 mm (3' 11 1/4")
-  30 mm (1 3/16")
(5.9–10 mm (7/32" to 13/32"))









Installation examples

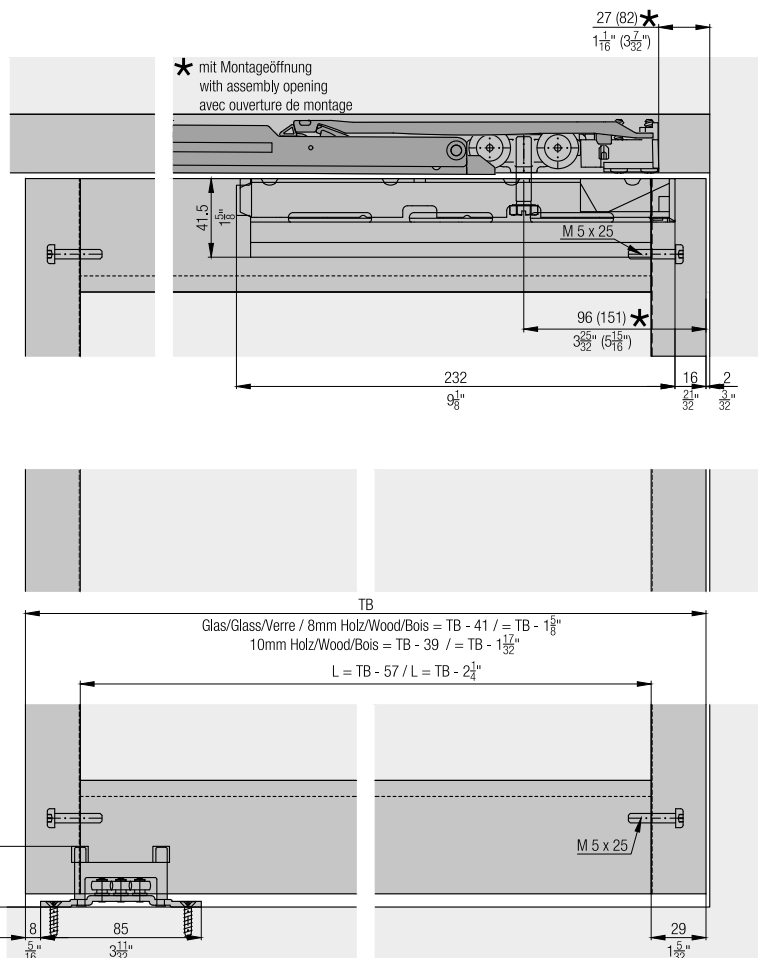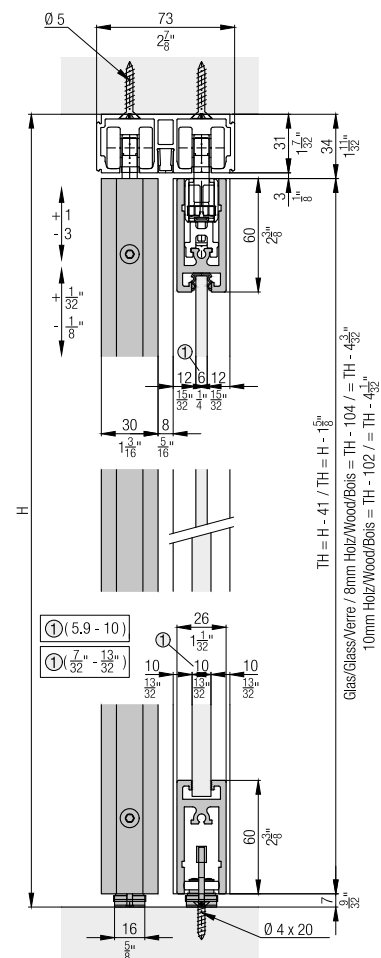



Set for 1 aluminum frame door up to 100 kg (220 lbs.)

		No.
Hawa Divido 100 GRM, for 1 door		042.3113.071
		No.
Set consisting of:		042.3113.071
	Running gear, ball bearing, rollers plastic white	2 057.3114.071
	Stopper, with retention spring, plastic, gray	2 057.3073.072
	Hexagon head screw, M8x36 mm (5/16"x1 13/32"), steel, zinc-plated	2 042.0165.101
	Cover cap, plastic, grey	2 600.0000.533
	Running gear holder, plastic, anthracite	2 042.0168.001
	Housing, steel, zinc-plated	2 042.0171.071
	Hexalobular pan head thread forming screw, M5x25 mm (3/16"x31/32"), steel, zinc-plated	8 600.0000.174
	Bottom guide, steel, zinc-plated	1 042.3016.171
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated	2 766.5042.120





Running tracks

		mm (inch)	No.
	Running track, aluminum, pre-drilled	2,000 (6' 6 3/4 ")	057.3016.200
		2,500 (8' 2 7/16 ")	057.3016.250
		6,000 (19' 8 7/32 ")	057.3016.600
		cut to size	057.3016.990
	Running track, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4 ")	057.3016.201
		2,500 (8' 2 7/16 ")	057.3016.251
		6,000 (19' 8 7/32 ")	057.3016.601
		cut to size	057.3016.991
	Running track, with assembly opening, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16 ")	057.3016.256
	Double running track, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16 ")	042.3002.250
		3,500 (11' 5 25/32 ")	042.3002.350
		6,000 (19' 8 7/32 ")	042.3002.600
		cut to size	042.3002.990
	Triple running track, aluminum, anodized, pre-drilled	6,000 (19' 8 7/32 ")	042.3084.600
		cut to size	042.3084.990
	Disposable cover to running track Hawa Divido 100 / Hawa Porta 45/60/100, plastic, black	2,000 (6' 6 3/4 ")	057.3098.001
		cut to size	057.3098.990



Panels

		mm (inch)	No.
	Clip-on panel, aluminum, anodized	2,500 (8' 2 7/16 ")	042.3004.250
		3,500 (11' 5 25/32 ")	042.3004.350
		6,000 (19' 8 7/32 ")	042.3004.600
		cut to size	042.3004.990
	Cover profile for 042.3002./042.3084., aluminum, anodized	6,000 (19' 8 7/32 ")	042.3086.600
		cut to size	042.3086.990



Frame profiles

		mm (inch)	No.
	Frame profile horizontal, aluminum, anodized	2,500 (8' 2 7/16")	042.3000.250
		6,000 (19' 8 7/32")	042.3000.600
		cut to size	042.3000.990
	Frame profile vertical, aluminum, anodized	2,500 (8' 2 7/16")	042.3001.250
		6,000 (19' 8 7/32")	042.3001.600
		cut to size	042.3001.990
	Frame profile, with handle, vertical, aluminum, anodized	2,500 (8' 2 7/16")	042.3083.250
		6,000 (19' 8 7/32")	042.3083.600
		cut to size	042.3083.990
	Frame profile for front subdivision, aluminum, anodized	2,500 (8' 2 7/16")	042.3007.250
		cut to size	042.3007.990


Glass retaining profiles

		mm (inch)	No.
	Glass retaining profile, glass thickness 6 mm (1/4"), with trimmed edge, plastic, transparent	20,000 (65' 7 13/32")	042.3021.002
	Glass retaining profile, glass thickness 5.9–6.4 mm (1/4"), with grounded edge, plastic, transparent	20,000 (65' 7 13/32")	042.3079.002

Leading edge frame profiles

		mm (inch)	No.
	Front edge profile for 057.3084./042.3001./042.3083., aluminum, anodized	2,500 (8' 2 7/16")	042.3005.250
		3,000 (9' 10 1/8 ")	042.3005.300
		6,000 (19' 8 7/32")	042.3005.600
		cut to size	042.3005.990
	Sealing profile, plastic, gray, in rolls	10,000 (32' 9 11/16")	042.3010.002





Screw set for frame bar

	No.
 Screw set for frame rung 042.3007., aluminum frame system, 4-pieces set	099.0031.999

Soft close



For soft closing in opening and closing direction order 2 sets.

	No.
Soft close Hawa Porta 100, Divido 100, 61–100 kg (133 to 220 lbs.), 1 piece	042.3102.071
Soft close Hawa Porta 60/100, Divido 100, 10–60 kg (22 to 132 lbs.), 1 piece	042.3102.072


		042.3102.071	042.3102.072	No.
Set consisting of:				
	Soft close, top running, 61–100 kg (133 to 220 lbs.), plastic	1		042.3106.071
	Trigger for soft close in buildings, zinc die casting	1	1	042.3105.001
	Screw set soft close	1	1	600.0000.566
	Soft close, top running, 10–60 kg (22 to 132 lbs.), plastic		1	042.3106.072

Cover for assembly opening






	No.
Cover cap to assembly opening, 1-piece set	042.3114.071

		042.3114.071	No.
Set consisting of:			
	Cover cap assembly opening, plastic, gray	1	042.0172.001
	Screw set soft close	1	600.0000.566


Wall compensation profiles

		mm (inch)	No.
	Wall compensation profile, with sealing profile gray, aluminum, anodized	2,500 (8' 2 7/16")	042.3064.071
		3,000 (9' 10 1/8 ")	042.3064.072


Accessories

		No.
	Drilling and routing jig Hawa Divido GR/GRM	042.3045.001
	Centering help for 8 mm (5/16") filling material, 15-piece set	042.3047.002
	Routing jig for assembly opening	042.3118.071
	Groove cutter to routing jig, Ø= 10 mm (13/32"), hard metal	600.0000.309
	Track cleaner, plastic, blue	057.3099.071
	Glue Ceresit 3B Silicone, 310 ml	098.0027.000


Further installation examples

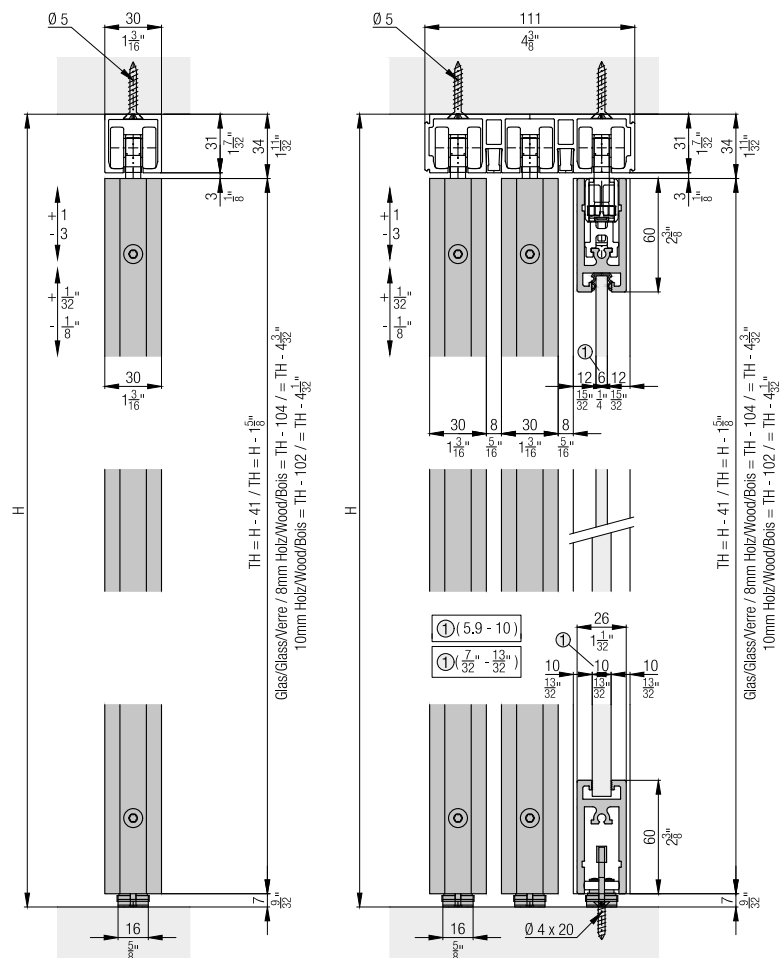


Wall compensation profile




Calculations

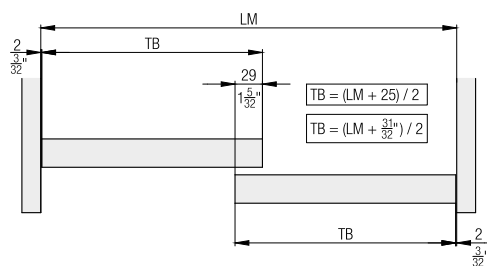


Top-down view of doors

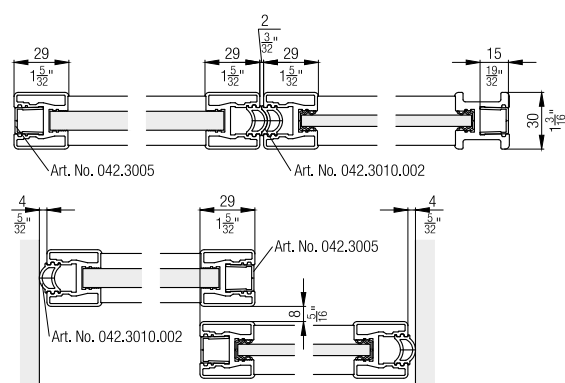

Cross sections of profiles with panels

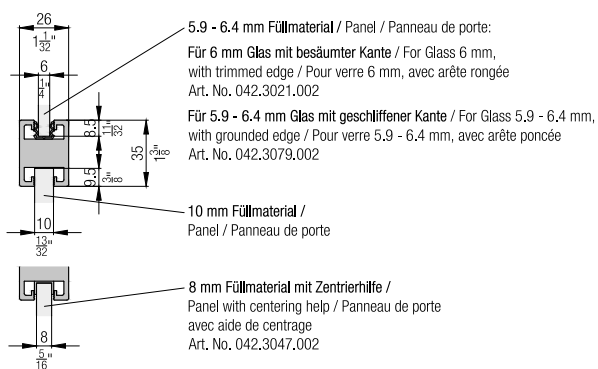

Soft close

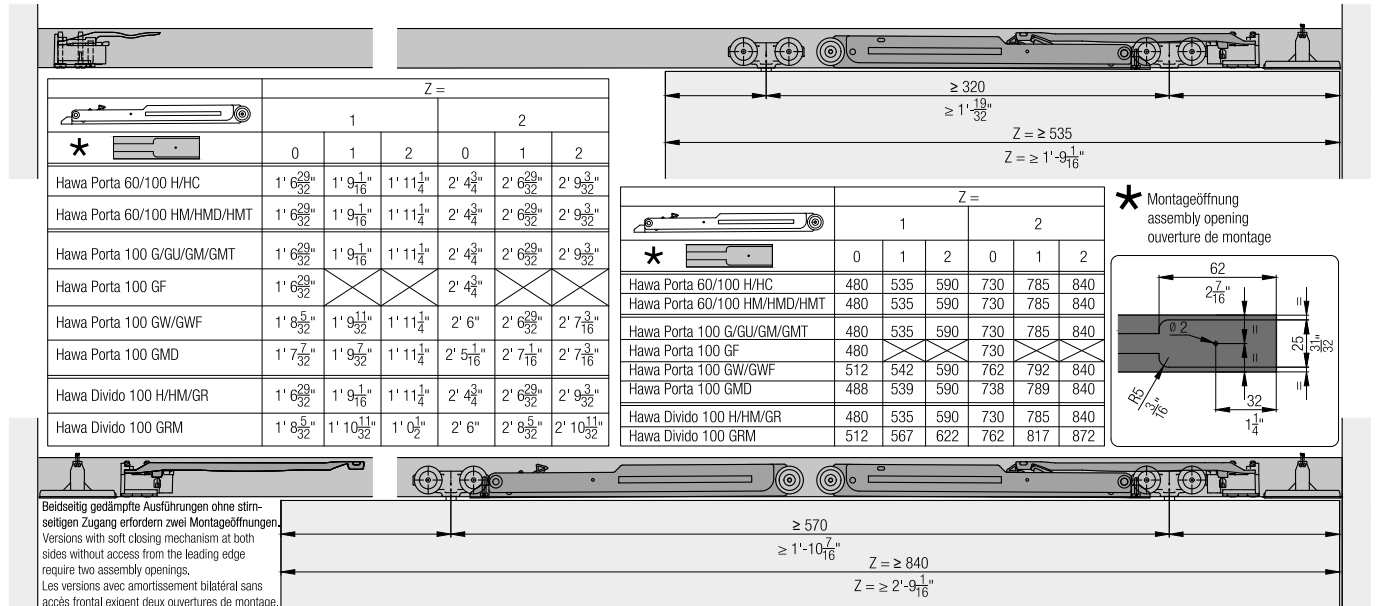

Accessories

- Hawa 4-point guidance from page 521
- Hawa Divido overview from page 535
- Hawa Divido GR door weight calculations from page 537
- Glass recommendations from page 536

Planning/execution

Further information about the product can be found on www.hawa.com.