






## Fitting for 2 synchronously opening glass doors up to 100 kg (220 lbs.), with surface mounted running track. Wall mounting.

### Product highlights



- Flexibility** Standard applications can be extended with the Synchro option
- Comfort** Two simultaneously sliding doors make large, fully accessible openings possible

### Technical specifications

	Max.	100 kg (220 lbs.)
	Max.	2750 mm (9' 9/32")
	Max.	1200 mm (3' 11 1/4")
		30 mm (1 3/16")
		(5.9-10 mm (7/32" to 13/32"))

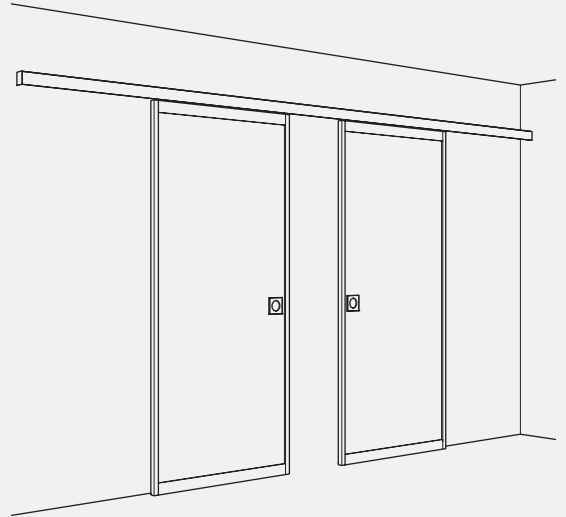

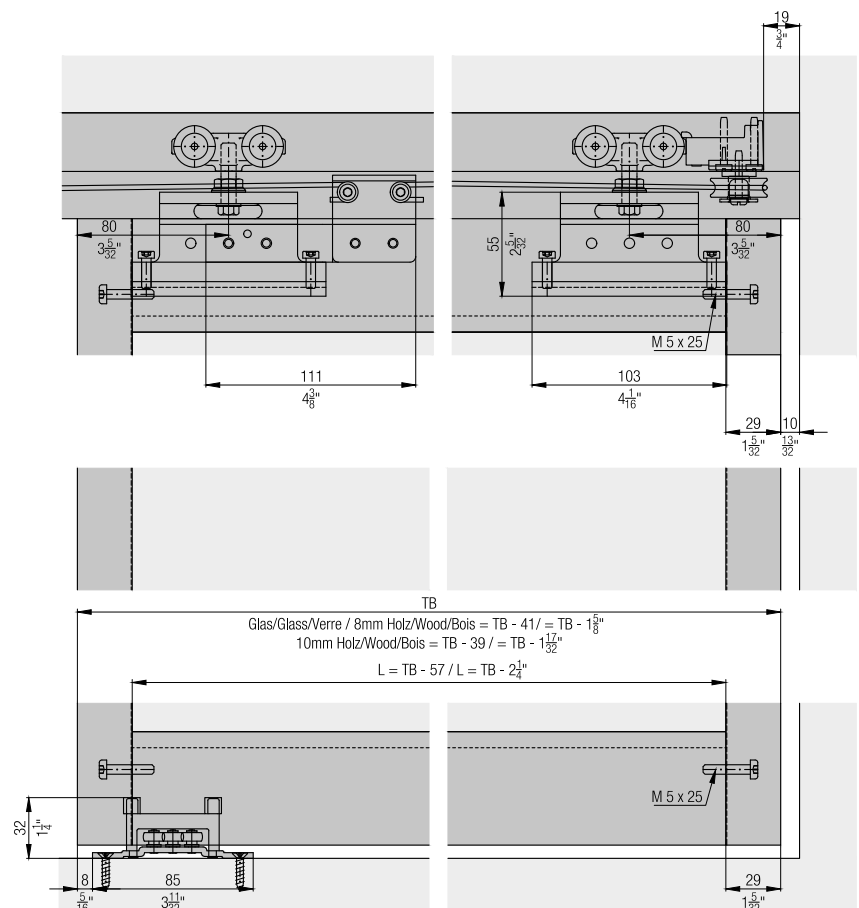
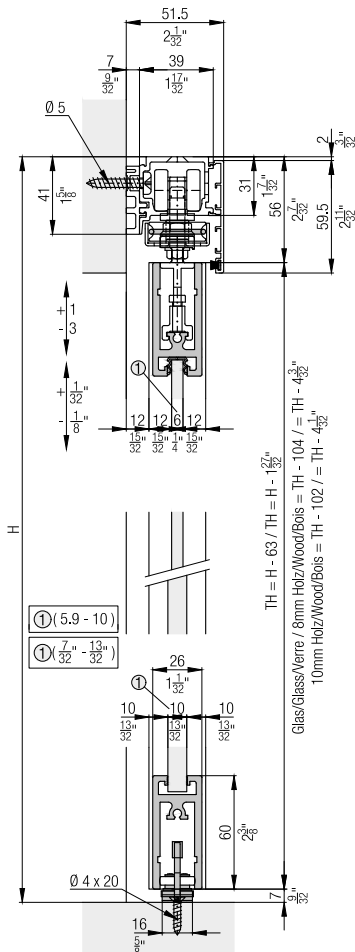





### Installation examples



**Set for 1 aluminum frame door up to 100 kg (220 lbs.)  
(order 2x)**









	No.
Hawa Divido 100 GR, for 1 door	042.3025.071

**Set consisting of:**




		042.3025.071	No.
	Running gear, ball bearing, rollers plastic white	2	057.3114.071
	Stopper, with retention spring, plastic, gray	2	057.3073.072
	Suspension bolt, M8x32 mm (5/16" x 1 1/4"), steel, zinc-plated	2	057.0123.104
	Hexagon locking nut, M8, steel, zinc-plated	2	768.9005.101
	Running gear support, aluminum	2	042.3006.071
	Hexalobular pan head thread forming screw, M5x25 mm (3/16" x 31/32"), steel, zinc-plated	8	600.0000.174
	Bottom guide, steel, zinc-plated	1	042.3016.171
	Countersunk head screw, 4x20 mm (5/32" x 25/32"), steel, zinc-plated	2	766.5042.120

**Synchro set**



	No.
Hawa Divido 100 GR Synchro, for 2 doors	042.3027.071

		mm (inch)	042.3027.071	No.
	Deviating roller, ball bearing	2		055.0101.001
	Cable safety, steel, zinc-plated	2		056.0124.101
	Set cable holder, steel, zinc-plated	1		042.3015.171
	Bush, steel, zinc-plated	2		057.0147.101
	Kevlar cable, D= 2.5 mm (3/32")	10,000 (32' 9 11/16")	1	752.0059.104
	Flat washer, M5, 5.3/15/2 mm (3/16"/19/32"/3/32"), steel, zinc-plated	2		600.0000.681
	Rounded head screw, 5x25 mm (3/16" x 31/32"), steel, zinc-plated	2		762.9455.000
	Head cap screw, M5x8 mm (3/16" x 5/16"), steel, zinc-plated	4		600.0000.171


**Running tracks**

		mm (inch)	No.
	Combi running track, aluminum, pre-drilled	2,500 (8' 2 7/16")	057.3048.250
		3,500 (11' 5 25/32")	057.3048.350
		6,000 (19' 8 7/32")	057.3048.600
		cut to size	057.3048.990
	Spacer track, for wall mounting, plastic, gray	2,000 (6' 6 3/4")	057.3054.200
		cut to size	057.3054.990
	Disposable cover to running track Hawa Divido 100 / Hawa Porta 45/60/100, plastic, black	2,000 (6' 6 3/4")	057.3098.001
		cut to size	057.3098.990





## Panels

		mm (inch)	No.
	Clip-on panel, aluminum, anodized	2,500 (8' 2 7/16")	042.3004.250
		3,500 (11' 5 25/32")	042.3004.350
		6,000 (19' 8 7/32")	042.3004.600
		cut to size	042.3004.990
	Brush seal, gray, in rolls	10,000 (32' 9 11/16")	053.3040.100



## Clip-on components

		No.
	Clip component for wooden and aluminum panel, every 500 mm (1' 7 11/16"), aluminium, pre-drilled	057.3117.001



## Frame profiles

		mm (inch)	No.
	Frame profile horizontal, aluminum, anodized	2,500 (8' 2 7/16")	042.3000.250
		6,000 (19' 8 7/32")	042.3000.600
		cut to size	042.3000.990
	Frame profile vertical, aluminum, anodized	2,500 (8' 2 7/16")	042.3001.250
		6,000 (19' 8 7/32")	042.3001.600
		cut to size	042.3001.990
	Frame profile, with handle, vertical, aluminum, anodized	2,500 (8' 2 7/16")	042.3083.250
		6,000 (19' 8 7/32")	042.3083.600
		cut to size	042.3083.990
	Frame profile for front subdivision, aluminum, anodized	2,500 (8' 2 7/16")	042.3007.250
		cut to size	042.3007.990


## Glass retaining profiles

		mm (inch)	No.
	Glass retaining profile, glass thickness 6 mm (1/4"), with trimmed edge, plastic, transparent	20,000 (65' 7 13/32")	042.3021.002
	Glass retaining profile, glass thickness 5.9–6.4 mm (1/4"), with grounded edge, plastic, transparent	20,000 (65' 7 13/32")	042.3079.002

## Leading edge frame profiles




		mm (inch)	No.
	Front edge profile for 057.3084./042.3001./ 042.3083., aluminum, anodized	2,500 (8' 2 7/16")	042.3005.250
		3,000 (9' 10 1/8")	042.3005.300
		6,000 (19' 8 7/32")	042.3005.600
		cut to size	042.3005.990
	Sealing profile, plastic, gray, in rolls	10,000 (32' 9 11/16")	042.3010.002

## Screw set for frame bar





		No.
	Screw set for frame rung 042.3007., aluminum frame system, 4-pieces set	099.0031.999

## Panel end component set, 51 mm (2"), aluminum, wall mounting


	No.
Panel end component set for 057.3048., 51x60 mm (2"x2 3/8"), aluminum, anodized, for wall mounting	042.3028.075

		042.3028.075	No.
	Panel end component, 51 mm (2"), aluminum, anodized	1	042.3028.905
	Bracker connector, steel, zinc-plated	2	057.3051.101
	Screw, M4x2.6 mm (5/32"x 1/8"), steel, zinc-plated	4	011.0101.171


## Accessories

		No.
	Drilling and routing jig Hawa Divido GR/GRM	042.3045.001
	Centering help for 8 mm (5/16") filling material, 15-piece set	042.3047.002
	Track cleaner, plastic, blue	057.3099.071
	Glue Ceresit 3B Silicone, 310 ml	098.0027.000


## Further installation examples

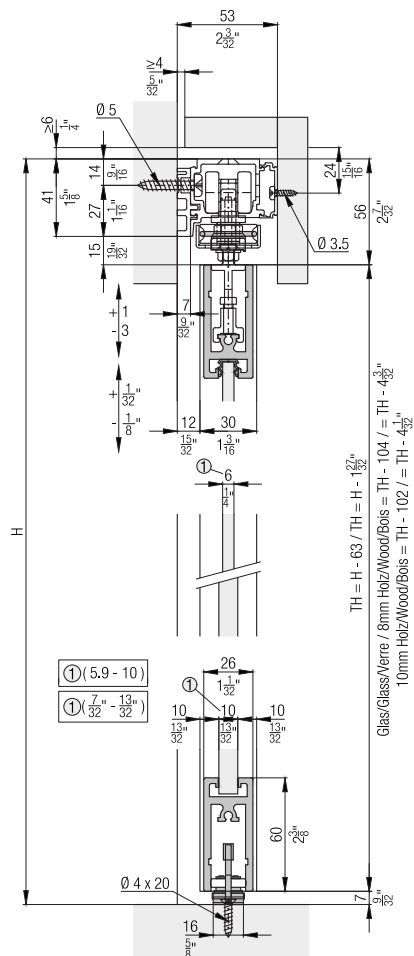


## Calculations of clip-on panels

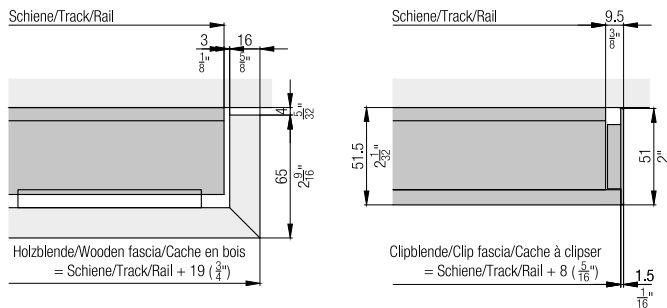


## Top-down view of doors

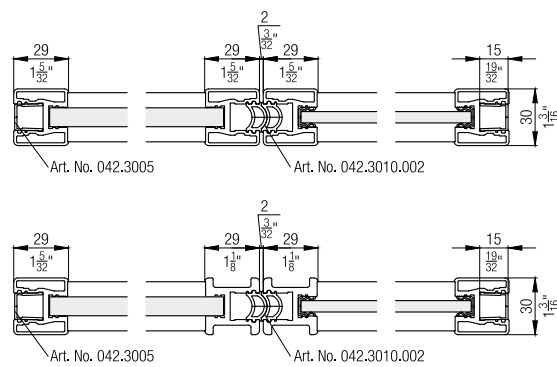

## Cross sections of profiles with panels

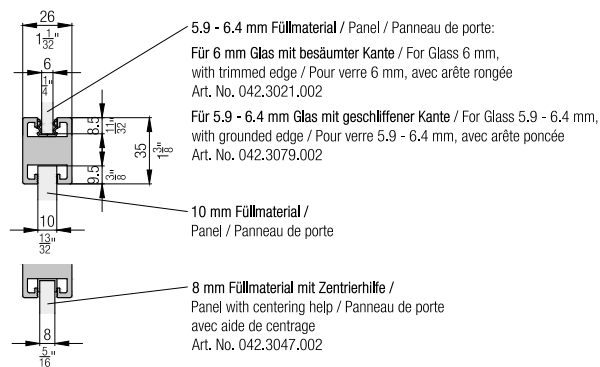

## Calculations

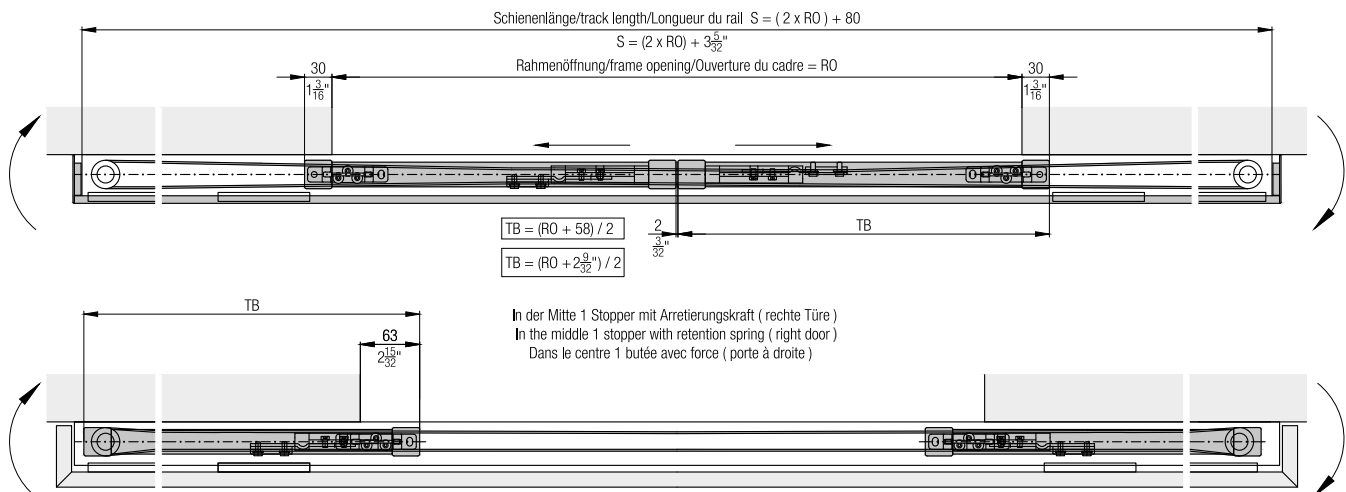

## Accessories

- Hawa 4-point guidance from page 521
- Hawa Divido overview from page 535
- Hawa Divido GR door weight calculations from page 537
- Glass recommendations from page 536

## Planning/execution

Further information about the product can be found on [www.hawa.com](http://www.hawa.com).