

Fitting for top-running wooden doors up to 100 kg (220 lbs.), with surface mounted running track. With soft and self closing mechanism. Ceiling mounting. Minimal installation height.

Product highlights



Flexibility

Ceiling-integrated or surface-mounted installation with the same system



Productivity

Tool-less door mounting

Technical specifications



Max. 100 kg (220 lbs.)



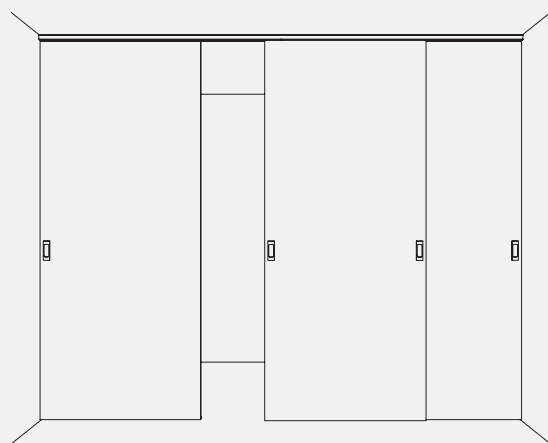
Max. 2400 mm (7' 10 7/16")




Max. 1200 mm (3' 11 1/4")



28–30 mm (1 3/32" to 1 3/16")



Installation examples

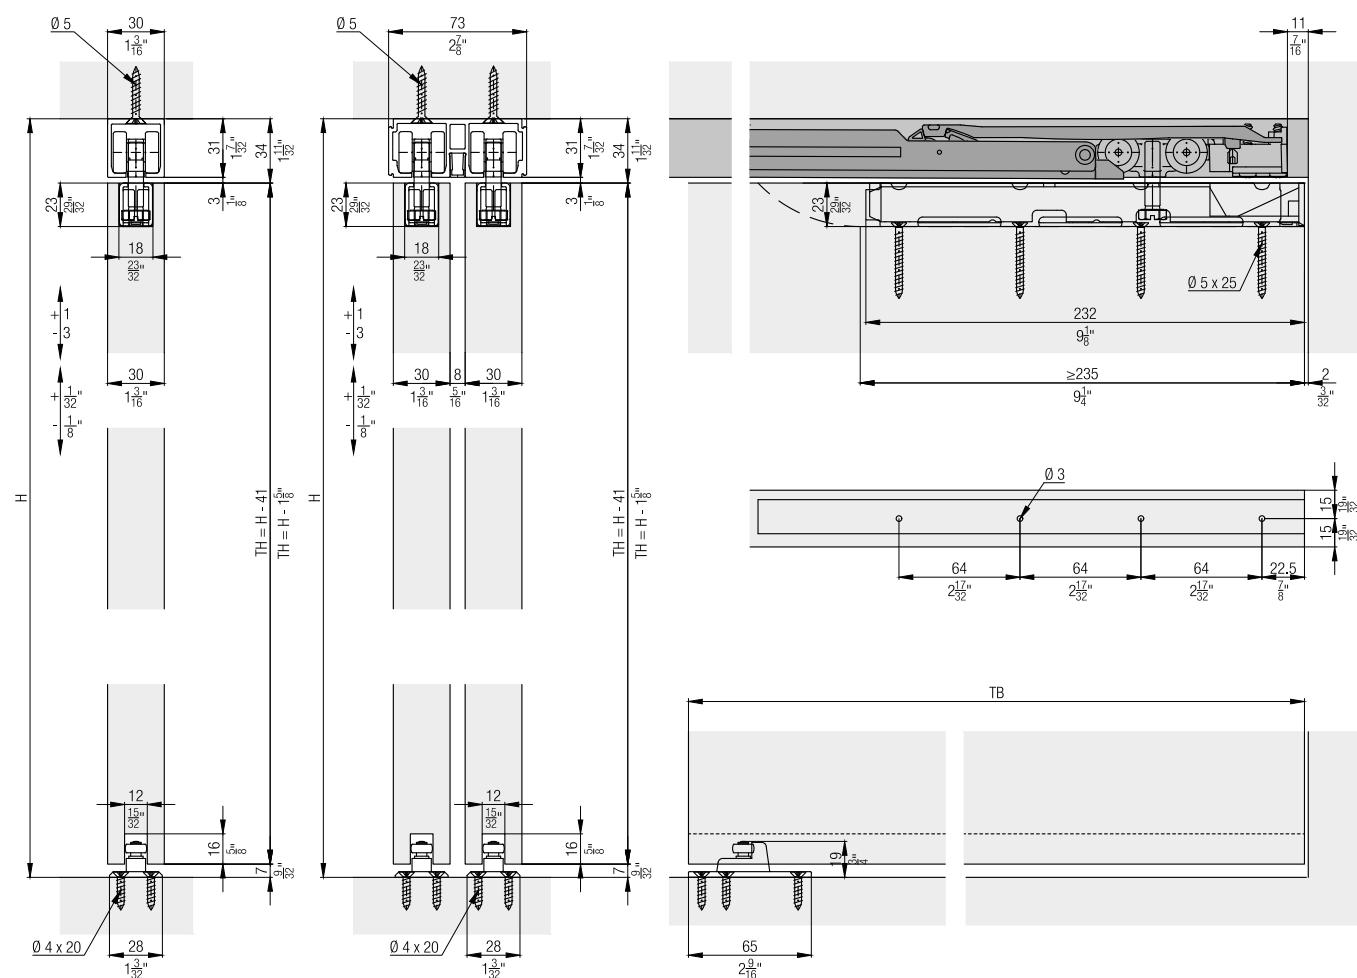







Set for 1 wooden door up to 100 kg (220 lbs.)

	No.
Hawa Porta 100 HM/HMD and Hawa Divido 100 HM, minimal installation height, for 1 door	057.3133.071


Set consisting of:

	057.3133.071	No.
	2	057.3114.071
	2	057.3073.072
	2	042.0165.101
	2	600.0000.533
	2	042.0167.001
	2	042.0166.101
	8	766.5040.140
	1	057.3120.071
	4	766.5042.120

Running tracks

		mm (inch)	No.
	Running track, aluminum, pre-drilled	2,000 (6' 6 3/4 ")	057.3016.200
		2,500 (8' 2 7/16 ")	057.3016.250
		6,000 (19' 8 7/32 ")	057.3016.600
		cut to size	057.3016.990
	Running track, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4 ")	057.3016.201
		2,500 (8' 2 7/16 ")	057.3016.251
		6,000 (19' 8 7/32 ")	057.3016.601
		cut to size	057.3016.991
	Running track, with assembly opening, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16 ")	057.3016.256
	Double running track, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16 ")	042.3002.250
		3,500 (11' 5 25/32 ")	042.3002.350
		6,000 (19' 8 7/32 ")	042.3002.600
		cut to size	042.3002.990
	Triple running track, aluminum, anodized, pre-drilled	6,000 (19' 8 7/32 ")	042.3084.600
		cut to size	042.3084.990
	Disposable cover to running track Hawa Divido 100 / Hawa Porta 45/60/100, plastic, black	2,000 (6' 6 3/4 ")	057.3098.001
		cut to size	057.3098.990

Panels





		mm (inch)	No.
	Cover profile for 042.3002./042.3084., aluminum, anodized	6,000 (19' 8 7/32 ")	042.3086.600
		cut to size	042.3086.990

Soft close

For soft closing in opening and closing direction
order 2 sets.

	No.
Soft close Hawa Porta 100, Divido 100, 61–100 kg (133 to 220 lbs.), 1 piece	042.3102.071
Soft close Hawa Porta 60/100, Divido 100, 10–60 kg (22 to 132 lbs.), 1 piece	042.3102.072



Set consisting of:

		042.3102.071	042.3102.072	No.
	Soft close, top running, 61–100 kg (133 to 220 lbs.), plastic	1		042.3106.071
	Trigger for soft close in buildings, zinc die casting	1	1	042.3105.001
	Screw set soft close	1	1	600.0000.566
	Soft close, top running, 10–60 kg (22 to 132 lbs.), plastic		1	042.3106.072


Cover for assembly opening

	No.
Cover cap to assembly opening, 1-piece set	042.3114.071


Set consisting of:

		042.3114.071	No.
	Cover cap assembly opening, plastic, gray	1	042.0172.001
	Screw set soft close	1	600.0000.566




Wall compensation profiles

		mm (inch)	No.
	Wall compensation profile, with sealing profile gray, aluminum, anodized	2,500 (8' 2 7/16")	042.3064.071
		3,000 (9' 10 1/8 ")	042.3064.072


Bottom guide set for wall mounting

		No.
	Set bottom guide for wall mounting, with roller	057.3128.171


Accessories

	No.
	Routing jig for assembly opening 042.3118.071
	Groove cutter to routing jig, Ø= 10 mm (13/32"), hard metal 600.0000.309
	Track cleaner, plastic, blue 057.3099.071

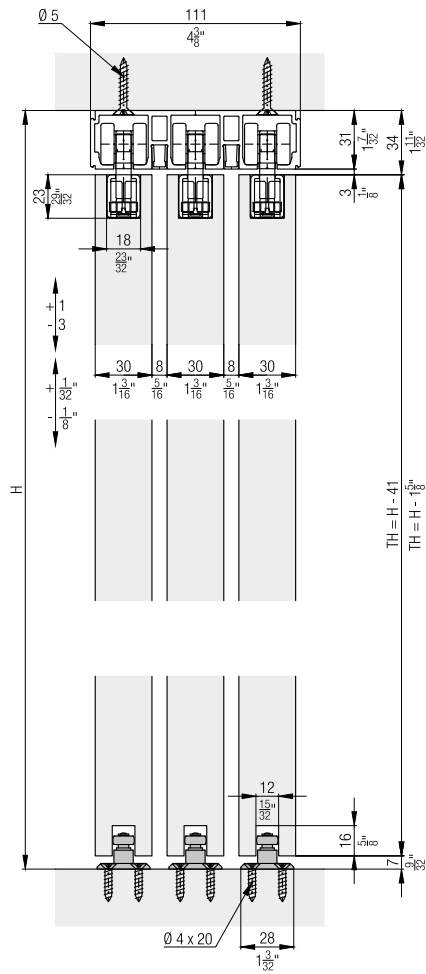
Further installation examples




Calculations of running track length

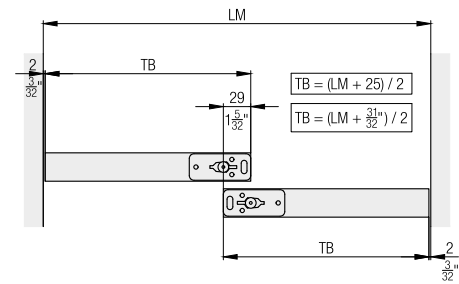


Wall compensation profile



Soft close



	Z =					
	1			2		
*	0	1	2	0	1	2
Hawa Porta 60/100 H/H/C	1' 6 ²⁹ / ₃₂ "	1' 9 ¹ / ₁₆ "	1' 11 ¹ / ₄ "	2' 4 ³ / ₈ "	2' 6 ²⁹ / ₃₂ "	2' 9 ³ / ₃₂ "
Hawa Porta 60/100 HM/HMD/HMT	1' 6 ²⁹ / ₃₂ "	1' 9 ¹ / ₁₆ "	1' 11 ¹ / ₄ "	2' 4 ³ / ₈ "	2' 6 ²⁹ / ₃₂ "	2' 9 ³ / ₃₂ "
Hawa Porta 100 G/GU/GM/GMT	1' 6 ²⁹ / ₃₂ "	1' 9 ¹ / ₁₆ "	1' 11 ¹ / ₄ "	2' 4 ³ / ₈ "	2' 6 ²⁹ / ₃₂ "	2' 9 ³ / ₃₂ "
Hawa Porta 100 GF	1' 6 ²⁹ / ₃₂ "			2' 4 ³ / ₈ "		
Hawa Porta 100 GW/GWF	1' 8 ³ / ₃₂ "	1' 9 ¹ / ₃₂ "	1' 11 ¹ / ₄ "	2' 6"	2' 6 ²⁹ / ₃₂ "	2' 7 ³ / ₁₆ "
Hawa Porta 100 GMD	1' 7 ³ / ₃₂ "	1' 9 ¹ / ₃₂ "	1' 11 ¹ / ₄ "	2' 5 ¹ / ₁₆ "	2' 7 ¹ / ₁₆ "	2' 7 ³ / ₁₆ "
Hawa Divido 100 H/HM/GR	1' 6 ²⁹ / ₃₂ "	1' 9 ¹ / ₁₆ "	1' 11 ¹ / ₄ "	2' 4 ³ / ₈ "	2' 6 ²⁹ / ₃₂ "	2' 9 ³ / ₃₂ "
Hawa Divido 100 GRM	1' 8 ⁵ / ₃₂ "	1' 10 ¹¹ / ₃₂ "	1' 0 ¹ / ₂ "	2' 6"	2' 8 ⁵ / ₃₂ "	2' 10 ¹¹ / ₃₂ "




≥ 320
 $\geq 1' \frac{19}{32}"$
 $Z \geq 535$
 $Z \geq 1' - 9 \frac{1}{16}"$

	Z =					
	1			2		
*	0	1	2	0	1	2
Hawa Porta 60/100 H/H/C	480	535	590	730	785	840
Hawa Porta 60/100 HM/HMD/HMT	480	535	590	730	785	840
Hawa Porta 100 G/GU/GM/GMT	480	535	590	730	785	840
Hawa Porta 100 GF	480			730		
Hawa Porta 100 GW/GWF	512	542	590	762	792	840
Hawa Porta 100 GMD	488	539	590	738	789	840
Hawa Divido 100 H/HM/GR	480	535	590	730	785	840
Hawa Divido 100 GRM	512	567	622	762	817	872

≥ 570
 $\geq 1' - 10 \frac{7}{16}"$
 $Z \geq 840$
 $Z \geq 2' - 9 \frac{1}{16}"$

Beidseitig gedämpfte Ausführungen ohne stirnseitigen Zugang erfordern zwei Montageöffnungen.
 Versions with soft closing mechanism at both sides without access from the leading edge require two assembly openings.
 Les versions avec amortissement bilatéral sans accès frontal exigent deux ouvertures de montage.



≥ 570
 $\geq 1' - 10 \frac{7}{16}"$
 $Z \geq 840$
 $Z \geq 2' - 9 \frac{1}{16}"$

Accessories

- Hawa 4-point guidance from page 521
- Hawa stacking system from page 523
- Hawa Divido overview from page 535

Planning/execution

Further information about the product can be found on www.hawa.com.