








## Fitting for bottom-running wooden doors up to 80 kg (176 lbs.), with surface or recess mounted running track. System for sloping ceilings.

### Product highlights


-  **Flexibility** Two track systems can also be implemented in sloping ceilings as room dividers
-  **Productivity** Multi-track guide and running tracks reduce installation cost

### Technical specifications

-  Max. 80 kg (176 lbs.)
-  Max. 2400 mm (7' 10 7/16")
-  Max. 2000 mm (6' 6 3/4")
-  28–30 mm (1 3/32" to 1 3/16")

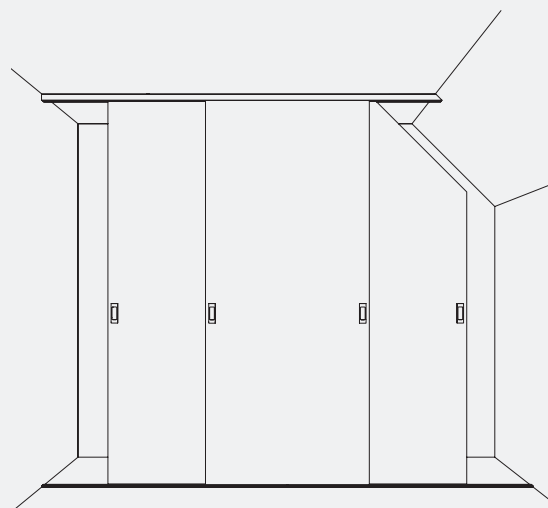



### Installation examples

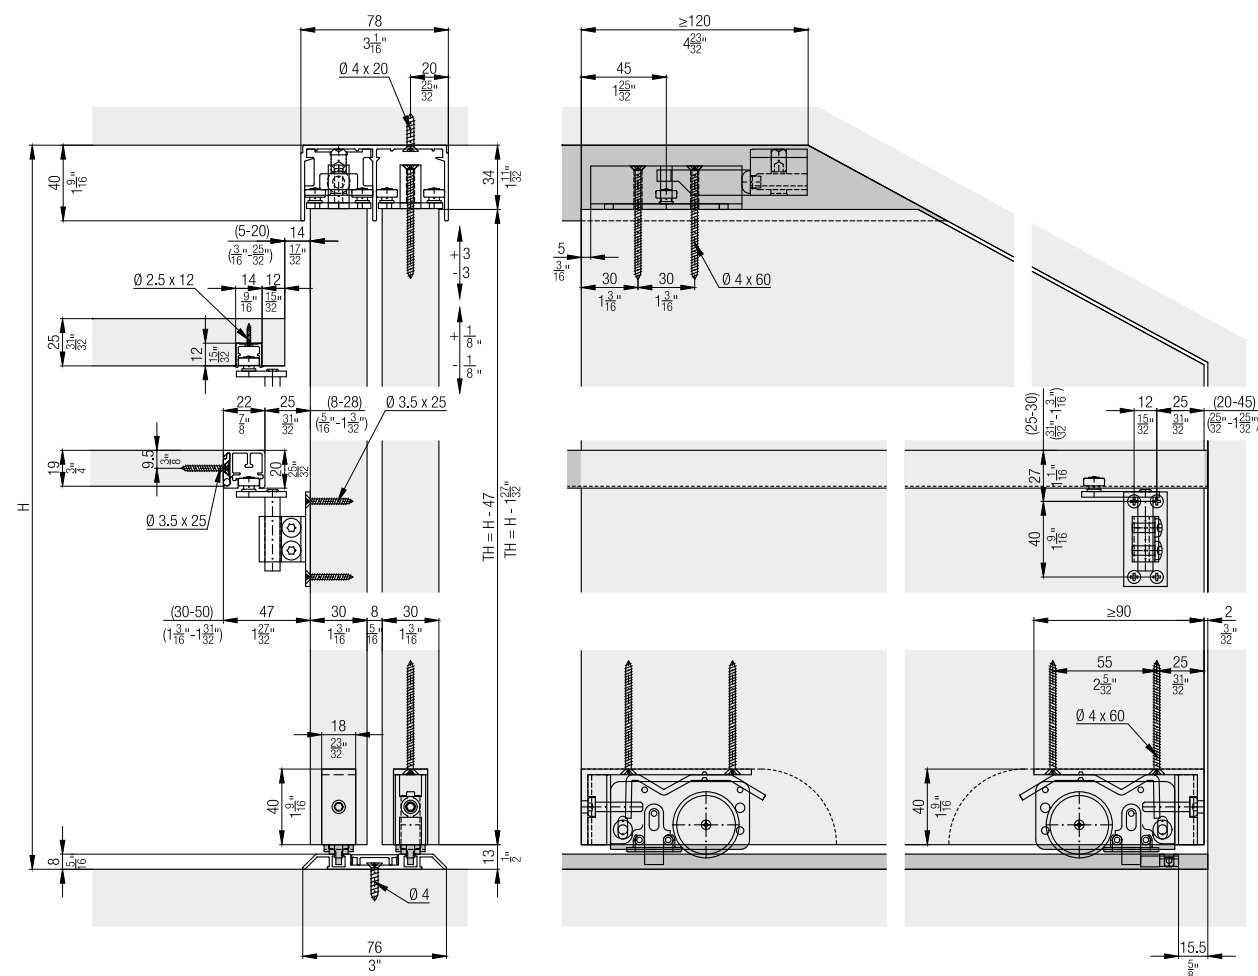

### Set for 1 wooden door up to 80 kg (176 lbs.)

	No.
Hawa Divido 80 H, for 1 door	042.3026.075





#### Set consisting of:

	Running gear, bottom running, steel	2	042.3018.071
	Adapter for wooden door, plastic, anthracite	2	042.3036.001
	Flat countersunk head chipboard screw, 4x60 mm (5/32"x2 3/8"), steel, zinc-plated	4	600.0000.139
	Stopper to running track Hawa Divido 80, plastic, grey	2	042.3008.071
	Soft closing gum, plastic, grey	2	042.0126.001
	Track end piece, plastic, grey	1	042.3046.001
	Set top guide	1	042.3032.172
	Stopper to guide track, plastic, grey	2	042.3012.071

### Runner set intermediate shelf

	No.
Hawa Divido 80 H, DS 3, for 1 wooden or aluminum frame door	042.3048.071





#### Set consisting of:

	Guide roller sloping ceiling, steel, zinc-plated	1	042.0129.171
	Bracket sloping ceiling, aluminum	1	042.0130.971
	Stopper guide, plastic, gray	1	040.3007.071
	Thread rolling rounded head screw, M4x8 mm (5/32"x5/16"), steel, zinc-plated	4	762.7007.108





### Fixing set for intermediate shelf guide track

	No.
Fixing for running and guide track, for H DS 3	042.3065.071


#### Set consisting of:

	Safety clip, zinc die-cast, grey	1	040.3090.001
	Fixing clip for running/guiding rails, plastic, grey	14	040.3084.001
	Safety pin 4x25 mm (5/32"x5/32"), steel, 4-piece set	1	098.0032.101
	Cover cap set, plastic, grey, 4-piece set	1	040.0142.001



**Running tracks  
(overview on page 535)**

		mm (inch)	No.
	Running track, aluminum, anodized, flush mounted	6,000 (19' 8 7/32")	042.3089.600
		cut to size	042.3089.990
	Single running track for 042.3039., alu- minum, anodized	2,500 (8' 2 7/16")	042.3037.250
		3,500 (11' 5 25/32")	042.3037.350
		6,000 (19' 8 7/32")	042.3037.600
		cut to size	042.3037.990
	Mounting track for 042.3037., aluminum, anodized	6,000 (19' 8 7/32")	042.3039.600
		cut to size	042.3039.990
	Single running track, aluminum, anodized, surface mounted	6,000 (19' 8 7/32")	042.3040.600
		cut to size	042.3040.990
	Double running track, aluminum, anodized, pre-drilled, surface mounted	6,000 (19' 8 7/32")	042.3041.600
		cut to size	042.3041.990
	Single running track, for glue fixing, aluminum, anodized, surface mounted	6,000 (19' 8 7/32")	042.3080.600
		cut to size	042.3080.990
	Double running track, aluminum, anodized, pre-drilled, surface mounted	6,000 (19' 8 7/32")	042.3081.600
		cut to size	042.3081.990
	Clip cover for 042.3039./042.3041./ 042.3081./042.3082., aluminum, anodized	6,000 (19' 8 7/32")	042.3038.600
		cut to size	042.3038.990



**Track end piece set for single running tracks**

	No.
	042.3090.081

**Guide tracks**

		mm (inch)	No.
	Single guide track, aluminum, anodized	2,500 (8' 2 7/16")	042.3049.250
		3,500 (11' 5 25/32")	042.3049.350
		6,000 (19' 8 7/32")	042.3049.600
		cut to size	042.3049.990
	Double guide track, aluminum, anodized, flush mounting	2,500 (8' 2 7/16")	042.3011.250
		3,500 (11' 5 25/32")	042.3011.350
		6,000 (19' 8 7/32")	042.3011.600
		cut to size	042.3011.990







**Guide tracks intermediate shelf**

		mm (inch)	No.
	Single guide track, aluminum, anodized	2,500 (8' 2 7/16")	040.3136.250
		3,500 (11' 5 25/32")	040.3136.350
		6,000 (19' 8 7/32")	040.3136.600
		cut to size	040.3136.990
	Guide track, alu- minum, pre-drilled	2,500 (8' 2 7/16")	056.3079.250
		3,500 (11' 5 25/32")	056.3079.350
		6,000 (19' 8 7/32")	056.3079.600
		cut to size	056.3079.990


### Soft close

For soft closing in opening and closing direction  
order 2 sets.

	No.
Soft close Hawa Divido 80, 61–80 kg (133 to 176 lbs.), 1 piece	042.3103.071
Soft close Hawa Divido 80, 10–60 kg (22 to 132 lbs.), 1 piece	042.3103.072


		042.3103.071	042.3103.072	No.
<b>Set consisting of:</b>				
	Soft close, bottom running, 61–80 kg (134 to 176 lbs.), plastic	1		042.3107.071
	Damper support, bottom running, plastic	1	1	042.3108.001
	Support bracket, bottom running, steel, zinc-plated	1	1	042.3110.101
	Stopper with trigger, plastic	1	1	042.3109.071
	Flat countersunk head chipboard screw, 4x60 mm (5/32"x2 3/8"), steel, zinc-plated	2	2	600.0000.139
	Cross recessed flat countersunk head screw, M4x50 mm (5/32"x1 31/32"), steel, zinc-plated	2	2	600.0000.492
	Soft close, bottom running, 10–60 kg (22 to 132 lbs.), plastic		1	042.3107.072

### Wall compensation profiles


		mm (inch)	No.
	Wall compensation profile, with sealing profile gray, aluminum, anodized	2,500 (8' 2 7/16")	042.3064.071
		3,000 (9' 10 1/8 ")	042.3064.072

### Intermediate stop


(cannot be used in conjunction with  
soft closing mechanism)

	No.
	Intermediate stop, plastic, gray 042.3031.071


## Installation examples running tracks

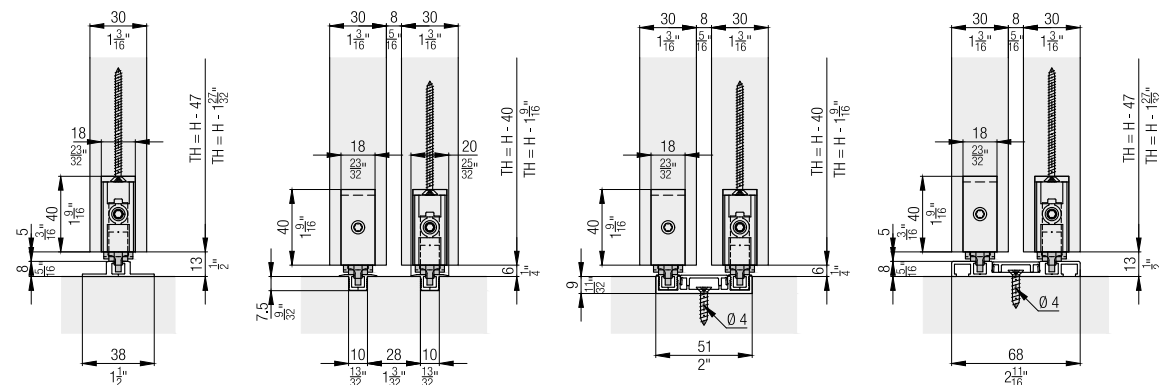


## Overview running tracks

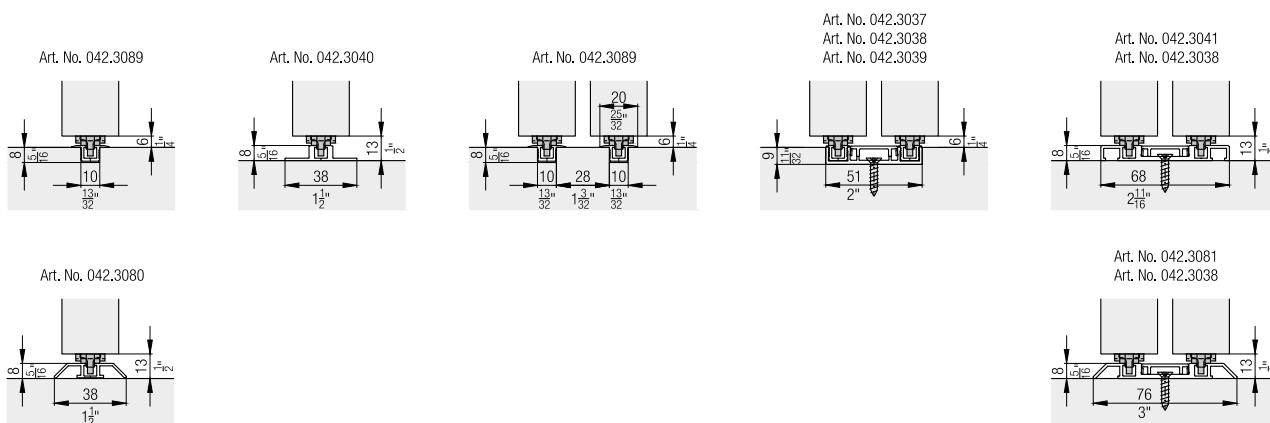


## Wall compensation profile



## Details of guide track on intermediate shelf

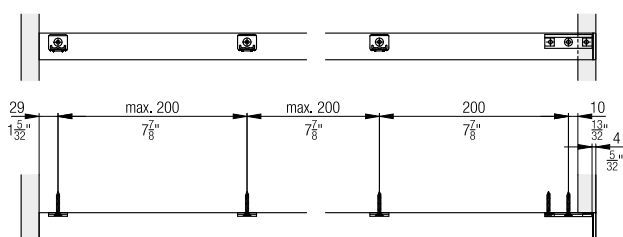

## Soft close

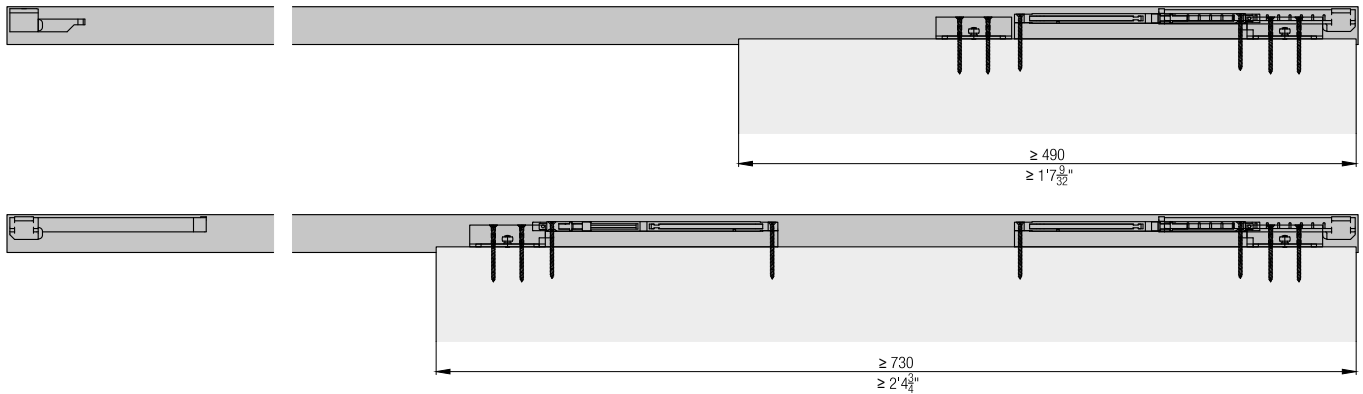

### Accessories

– Hawa Divido overview from page 535

### Planning/execution

Further information about the product can be found on [www.hawa.com](http://www.hawa.com).