








Fitting for 2–10 folding sliding shutters made of wood or metal up to 30 kg (66 lbs.) per shutter and 180 kg ((397 lbs.) per system, with visible running track and concealed guide track. Design Mixslide, open at the bottom.

Product highlights


-  **Flexibility** Solution for any construction situation with doors of up to 1.2 m² (13 ft²) and 30 kg (66 lbs.), even/odd number of doors and system width of up to 12 m (39' 4 7/16")
-  **Security** Corrosion-resistant materials for use in coastal areas without reservations

Technical specifications

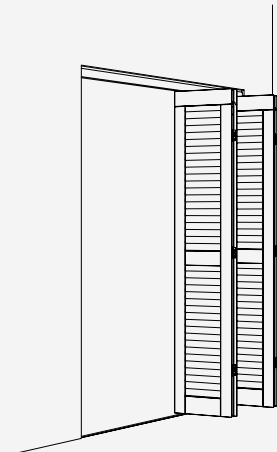


-  Max. 30 kg (66 lbs.)
-  Max. 3200 mm (10'5 31/32")
-  Max. 600 mm (1'11 5/8")
-  28–36 mm (1 3/32"–1 13/32")

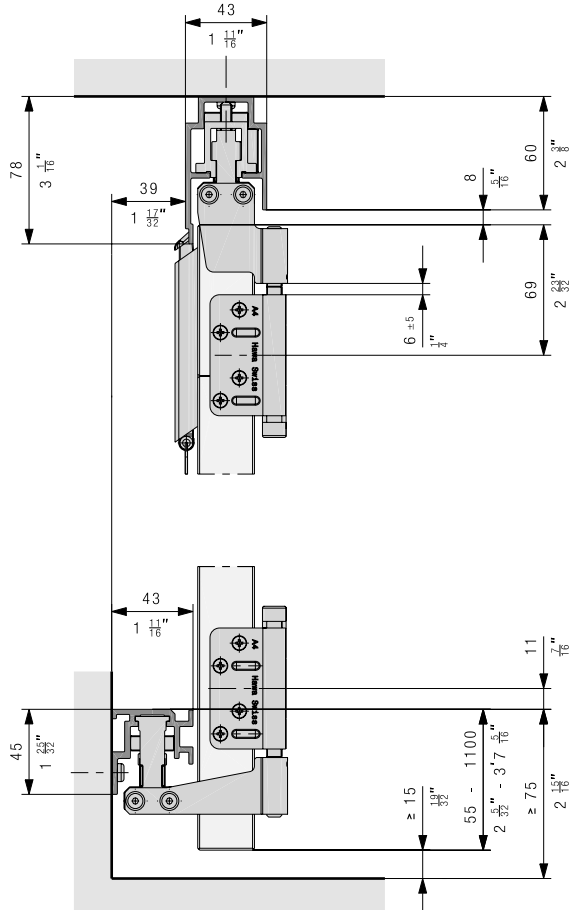















Installation examples



Set for folding packages

| | | No. |
|---|--|-------|
|  | Hawa Frontfold 30 MS, basic set, right, guide track open at the bottom | 27561 |
|  | Hawa Frontfold 30 MS, basic set, left, guide track open at the bottom | 27562 |
|  | Hawa Frontfold 30 MS, additional set, guide track open at the bottom | 27563 |








Set consisting of:

| | | 27561 | 27562 | 27563 | No. |
|---|---|-------|-------|-------|-------|
|  | Fixed suspension, Inslide, folding to the right | 1 | | | 27523 |
|  | Running gear outside, Inslide, folding to the right | 1 | | | 27524 |
|  | Fixed guide, Forslide, folding to the right, guide track open at the bottom | 1 | | | 27528 |
|  | Outside guide, Forslide, folding to the right, guide track open at the bottom | 1 | | | 27529 |
|  | Cylinder screw, M8x100 mm, A4-70 | 4 | 4 | 2 | 27401 |
|  | Hinge ring, plastic | 2 | 2 | 1 | 15740 |
|  | Hinge plate cranked, one-piece, stainless steel A4 | 4 | 4 | | 27418 |
|  | Fixed suspension, Inslide, folding to the left | | 1 | | 27522 |
|  | Running gear outside, Inslide, folding to the left | | 1 | | 27525 |
|  | Fixed guide, Forslide, folding to the left, guide track open at the bottom | | 1 | | 27527 |
|  | Outside guide, Forslide, folding to the left, guide track open at the bottom | | 1 | | 27530 |
|  | Centre running gear, Inslide | | | 1 | 27526 |
|  | Centre guide, Forslide, guide track open at the bottom | | | 1 | 27531 |
|  | Hinge plate cranked, two pieces, stainless steel A4 | | | 4 | 27419 |


Set for uneven number of leaves

| | No. |
|--|-------|
| Hawa Frontfold 30 MS uo, set for uneven number of leaves left | 30170 |
| Hawa Frontfold 30 MS uo, set for uneven number of leaves right | 30171 |




Set consisting of:

| | | 30170 | 30171 | No. |
|---|---|-------|-------|-------|
|  | Fixed suspension, Inslide, folding to the left | 1 | | 27522 |
|  | Fixed guide, Forslide, folding to the left, guide track open at the bottom | 1 | | 27527 |
|  | Hinge plate cranked, one-piece, stainless steel A4 | 2 | 2 | 27418 |
|  | Cylinder screw, M8x100 mm, A4-70 | 2 | 2 | 27401 |
|  | Hinge ring, plastic | 1 | 1 | 15740 |
|  | Fixed suspension, Inslide, folding to the right | | 1 | 27523 |
|  | Fixed guide, Forslide, folding to the right, guide track open at the bottom | | 1 | 27528 |













Running tracks

| | | mm (inch) | No. |
|---|--|-------------------|-------|
|  | Running track, Inslide, aluminum, anodized | 6000 (19'8 7/32") | 27362 |
| | | cut to size | 27624 |


Guide tracks

| | | mm (inch) | No. |
|---|---|----------------------|-------|
|  | Guide track, wall mounting, aluminum, anodized | 6000 (19'8 7/32") | 27364 |
| | | cut to size | 27625 |
|  | Guide track, floor mounting, aluminum, anodized | 6000 (19'8 7/32") | 27366 |
| | | cut to size | 27626 |
|  | Guide track, narrow, aluminum, anodized | cut to size | 27627 |

Accessories


| | | No. |
|---|---|-------|
|  | Tension latch, opening outwards, with steel cable, without fixing screws | 27490 |
|  | Tension latch, opening inwards, with steel cable, without fixing screws | 27491 |
|  | Rotary handle for tension latch, stainless steel | 27458 |
|  | Flat hinge, gap size 1-6 mm (1/32" to 1/4"), stainless steel A4 | 27421 |
|  | Cranked hinge, gap size 6 mm (1/4"), stainless steel A4 | 27595 |
|  | Hinge plate cranked, two pieces, stainless steel A4 | 27419 |
|  | Hinge plate flat, two pieces, stainless steel A4 | 27420 |
|  | Hinge pin A4 | 20187 |
|  | Drilling jig for hinge, Ø 3mm (1/8") for screw fixing, including threaded bolt | 27551 |
|  | Drilling jig for hinge, Ø 5mm (3/16") for riveting, including threaded bolt | 27552 |
|  | Stopper with adjusting screw, suitable for profile bar 8 mm (5/16") from the espagnolette locking device | 15899 |
|  | Strike plate, stainless steel , A4 to pull latch folding inwards | 30464 |

Running track folding inwards

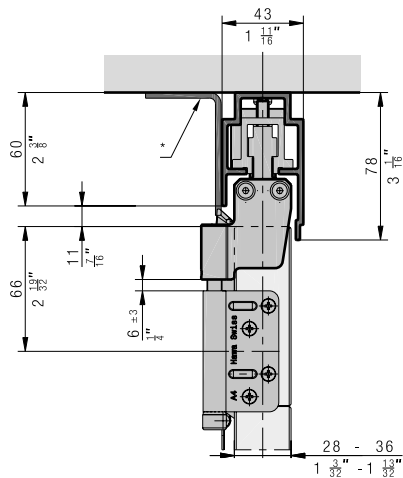

* Strike plate 30464 or on-site strike plate

Options folding hinges

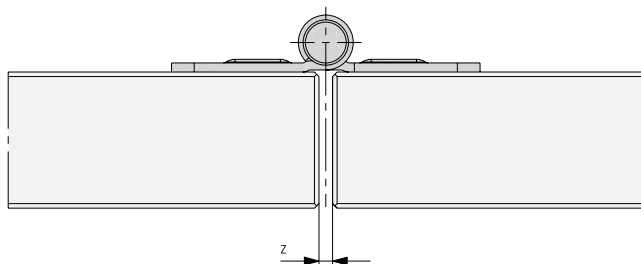


Variant 1, flat hinge: Z = 1–6 mm (1/32" to 1/4")

Planning folding package


Customer installation of a wind support is recommended.

With an odd number of doors, the last door must be secured by the customer.

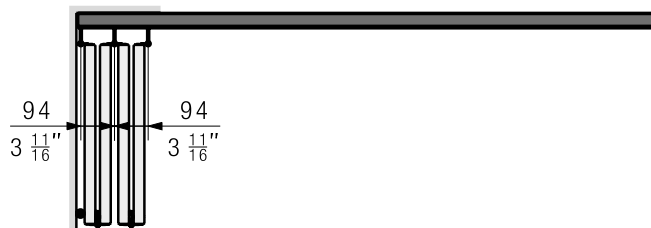


Running gear and guide hinge

With folding sliding shutters more than 33 mm (1 5/16") thick, the hinges must be embedded.

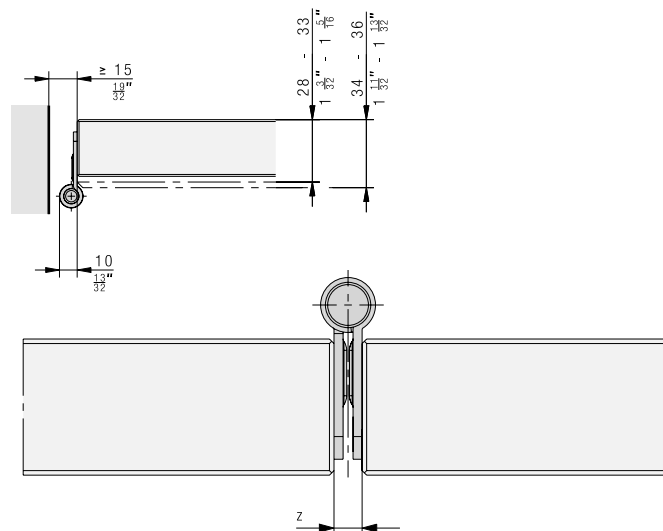

Variant 2, cranked hinge: Z = 6 mm (1/4")

Gap sizes



Number of hinges

| Height | Quantity |
|---------------|----------|
| up to 2000 mm | 2 |
| from 2001 mm | 3 |

Ordering information

- Type and number of sets
- Type and number of hinges
- Type and number of tension latches and rotary handles
- Type and number of running tracks
- Type and number of guide tracks

Optional ordering information

- Type and number of drilling jigs
- Order overview from page 194

Planning/execution

Further information about the product can be found on www.hawa.com.