


Fitting for top-running glass doors up to 120 kg (264 lbs.), with surface mounted running track or running track flush with the ceiling. Optionally with soft and self closing mechanism. Wall or ceiling mounting. Minimal installation height.

### Product highlights



- Aesthetics** Cover caps in different design versions
- Productivity** Easy height adjustment via both suspensions on completely installed door

### Technical specifications


- Max. 120 kg (264 lbs.)
- Max. 4000 mm (13'1 15/32")
- Max. 3000 mm (9'10 1/8")
- 8-12.7 mm (5/16" to 1/2")

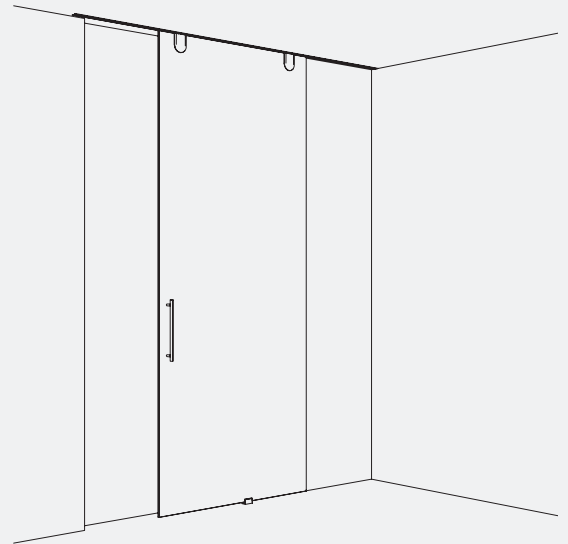





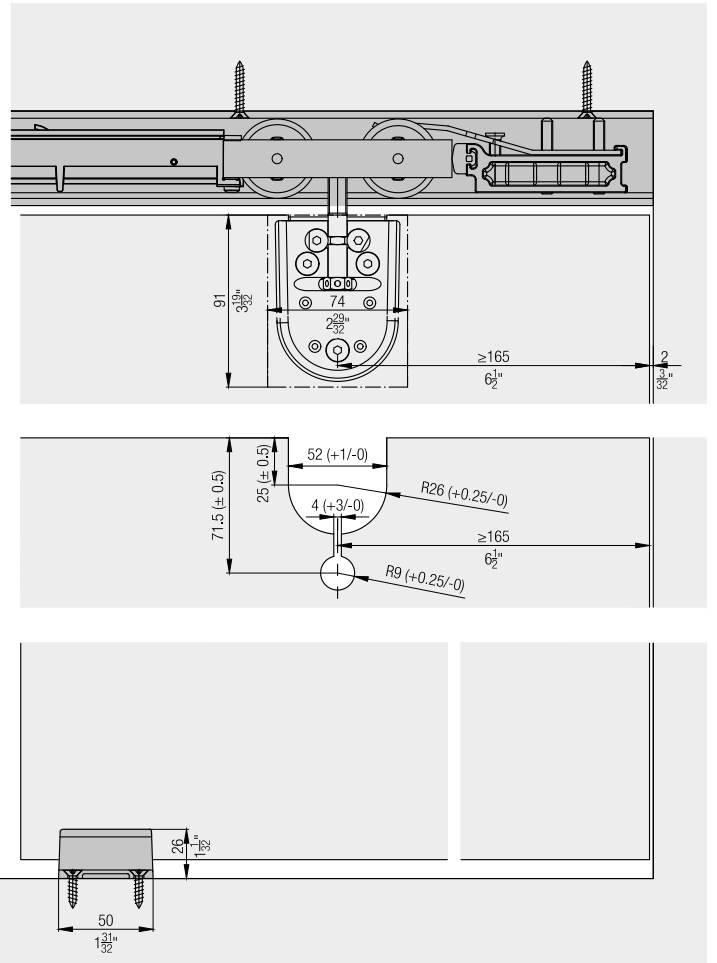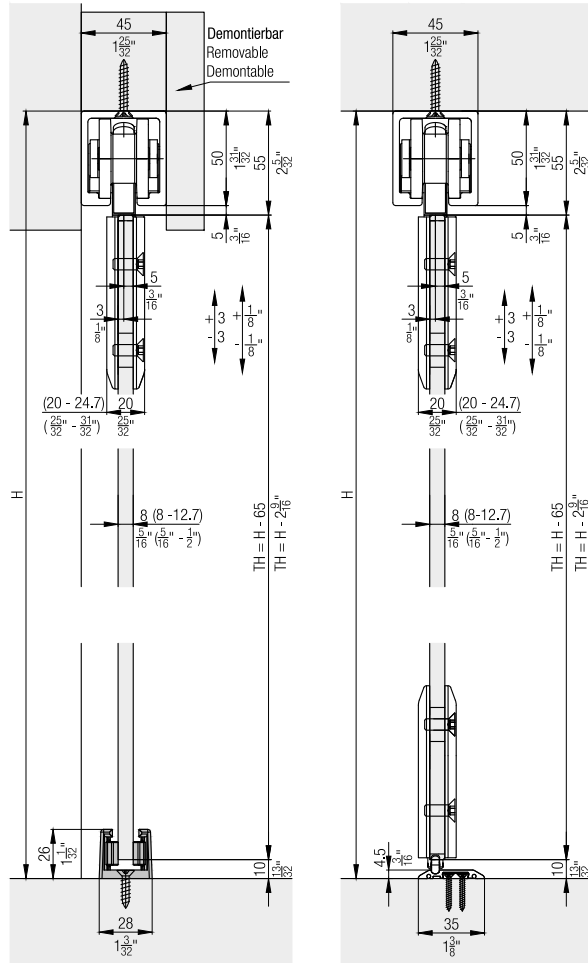


### Installation examples

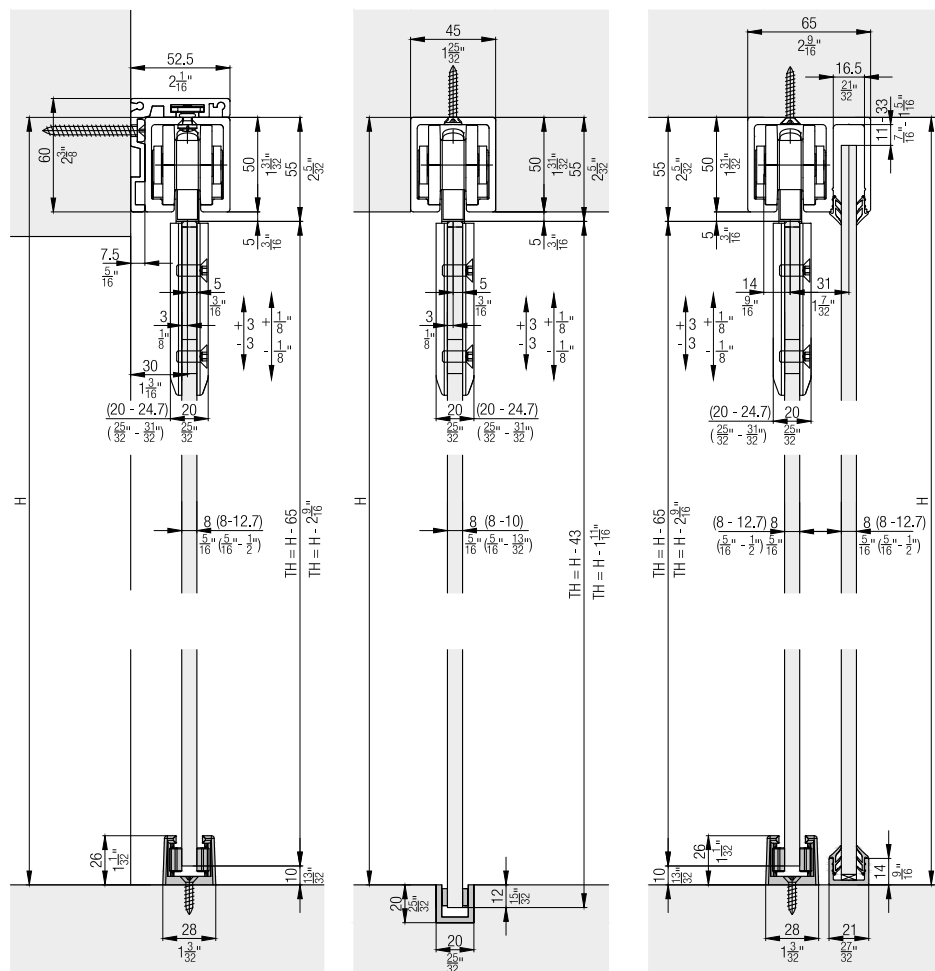











## Further installation examples
















# Set for 1 glass door up to 120 kg (264 lbs.)

		No.
Hawa Junior 120 GP, for 1 door		25909
		No.
<b>Set consisting of:</b>		25909
	Two-wheeled running gear, M12, plastic wheels	2 25900
	Track stopper, with adjustable retention spring	2 14858
	Suspension bolt M12 and mounting screws	2 16019
	Patch suspension, with glass holder insert, without mounting screws	2 20505
	Screw-on rubber door stop	1 10629
	Single use drilling jig	1 20400
	Vertical adjustment pin	1 16329


# Bottom guides

		No.
	Stop bumper, complete, for guide track 15405/15554	15636
	Set of fixing parts for surface mounted bottom guide channel, 5-piece set	19162
	Spring bottom guide for point fixing, with mounting screw	19118
	Guide slider, rattle proof, plastic, with mounting screw, for patch suspension	16020
	Patch suspension, with glass holder insert, without mounting screws	20505
	Bottom guide, rattle proof, with self-adhesive sliders for satinised glass, glass thickness 8–12.7 mm (5/16"–1/2"), chrome-plated, matt	16029
	Bottom guide, rattle proof, with self-adhesive sliders for satinised glass, glass thickness 8–12.7 mm (5/16"–1/2"), stainless steel look	21267
	Sliders, for 10 mm glass (13/32"), self-adhesive, 6-piece set	16193
	Sliders, for 8 mm (5/16") glass, self-adhesive, 6-piece set	16192
	Distance plate to bottom guide	16657




## Cover caps

		No.
	Cover cap, rounded, plastic, chrome-plated, matt, 1 piece	16049
	Cover cap, rounded, plastic, chrome-plated, matt, 4-piece set	16042
	Cover cap, rounded, plastic, chromium finish polished, 1 piece	17161
	Cover cap, rounded, plastic, chromium finish polished, 4-piece set	17160
	Cover cap, rounded, plastic, stainless steel look, 1 piece	16051
	Cover cap, rounded, plastic, stainless steel look, 4-piece set	16044
	Cover cap, rounded, plastic, raw, 1 piece	15823
	Cover cap, square, plastic, chrome-plated, matt, 1 piece	19091
	Cover cap, square, plastic, chrome-plated, matt, 4-piece set	19092
	Cover cap, square, plastic, stainless steel look, 1 piece	19093
	Cover cap, square, plastic, stainless steel look, 4-piece set	19094
	Square cover plate, plastic, raw, 1 piece	19000
	Cover cap, chrome-plated, matt, suitable to both sides	25332



## Running tracks

		mm (inch)	No.
	Running track, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	14866
		3,000 (9' 10 1/8 ")	14867
		4,000 (13' 1 15/32")	14868
		6,000 (19' 8 7/32")	14869
		cut to size	14871

## Guide tracks

		mm (inch)	No.
	Surface-mounted guide track, aluminum, anodized	2,500 (8' 2 7/16")	19348
		3,500 (11' 5 25/32")	19349
		6,000 (19' 8 7/32")	18956
		cut to size	19350
	Guide track, aluminum, anodized, pre-drilled	6,000 (19' 8 7/32")	14414
		cut to size	14415
	Guide track, aluminum, anodized	6,000 (19' 8 7/32")	15405
		cut to size	15554



**Running track set with fixed glazing,  
3000 mm (9'10 1/8"), aluminum, anodized**

	No.
Set running tracks, with fixed glass, aluminum, anodized, pre-drilled	20229
<b>Set consisting of:</b>	
	No.
	Set running tracks, with fixed glass, aluminum, anodized, pre-drilled
1	20235
	Cover profile to running track with fixed glass, aluminum, anodized
1	19553

### Running track set with fixed glazing, 4000 mm (13'1 7/16"), aluminum, anodized

	No.
Set running tracks, with fixed glass, aluminum, anodized, pre-drilled	20230



#### Set consisting of:

	20230	No.
	1	20054
	1	19553

### Running track set with fixed glazing, 6000 mm (19'8 7/32"), aluminum, anodized


	No.
Set running tracks, with fixed glass, aluminum, anodized, pre-drilled	20231

#### Set consisting of:


	20231	No.
	1	20055
	1	19562

### Soft close SoftMove 120




For soft closing in opening and closing direction  
order 2 sets.

	No.
	25988

### Angled profiles for wall mounting






	mm (inch)	No.
	4,000 (13' 1 15/32")	25327
	6,000 (19' 8 7/32")	25328
	cut to size	25329

### Individual components to angled profile

	No.
	19041
	25335
	21347






### Hawa Adapto 120 concrete casting system, without fixed glazing

	No.
Inset profile for concrete surfaces Hawa Adapto 120, without fixed glass, 3000 mm (9'10 1/8")	20218
Inset profile for concrete surfaces Hawa Adapto 120, without fixed glass, 4000 mm (13'1 15/32")	20219

	mm (inch)	20218	20219	No.
	3,000 (9' 10 1/8")	1		20093
	1,000 (3' 3 3/8")	3	4	19419
		4	5	19346
		2	2	19368
	4,000 (13' 1 15/32")		1	20091






**Hawa Adapto 120 concrete casting system,  
with fixed glazing**

	No.
Inset profile for concrete surfaces Hawa Adapto 120, with fixed glass, 3000 mm (9'10 1/8")	20222
Inset profile for concrete surfaces Hawa Adapto 120, with fixed glass	20223




Set consisting of:		mm (inch)	2022	2023	No.
	Inset profile for concrete surfaces, with fixed glass, aluminum	3,000 (9' 10 1/8 ")	1		20100
	Polystyrene insert, 1000 mm (3'3 1/4 "), with fixed glass	1,000 (3' 3 3/8 ")	3	4	19558
	Assembly clips, plastic black, with fixed glass		4	5	19569
	Cover cap, fixed glass, plastic, gray		2	2	19970
	Inset profile for concrete surfaces, with fixed glass, aluminum	4,000 (13' 1 15/32 ")		1	20098

**Assembly set for Hawa Adapto 120**


	No.
Assembly set, with countersunk head screw, length up to 2500 mm (8'2 7/16")(8'2 7/16")	22841
Assembly set, with countersunk head screw, length 2501–4000 mm (8'2 15/32"–13'1 15/32")	22842
Assembly set, with countersunk head screw, length 4001–6000 mm (13'1 17/32"–19'8 7/32")	22843

Set consisting of:		22841	22842	22843	No.
	Distance plate, plastic, 1 mm (1/32")	2	2	3	19398
	Distance plate, plastic, 2 mm (3/32")	2	2	3	19399
	Distance plate, plastic, 3 mm (1/8")	2	2	3	19400
	Distance plate, plastic, 5 mm (3/16")	4	4	6	19401
	Countersunk screws special, 6x20 mm (1/4"x25/32"), 10-piece set	1	2	3	22844





**Base/wall profiles and rubber profiles for fixed glazing**

		mm (inch)	No.
	Bottom-/wall profile to fixed glass, aluminum, anodized, pre-drilled	4,000 (13' 1 15/32 ")	19549
		6,000 (19' 8 7/32 ")	19561
		cut to size	20067
	Bottom-/wall profile to fixed glass, aluminum, stainless steel look, brushed, pre-drilled	4,000 (13' 1 15/32 ")	21285
		6,000 (19' 8 7/32 ")	21286
		cut to size	21287
	Rubber profile, black, to fixed glass 8–9.9 mm (5/16"–13/32")	10,000 (32' 9 11/16 ")	25787
	Rubber profile, black, to fixed glass 10–12 mm (13/32"–15/32")	10,000 (32' 9 11/16 ")	25789
	Rubber profile, black, to fixed glass 12.1–13.1 mm (15/32"–1/2")	10,000 (32' 9 11/16 ")	25763



### Vertical sealing profiles

		mm (inch)	No.
	Vertical seal 13/18, aluminum, anodized, for fixed glass with glass distance 13–18,5 mm (1/2"-3/4")	2,500 (8' 2 7/16")	20283
		3,500 (11' 5 25/32")	20284
	Vertical seal 13/18, aluminum, stainless steel look, brushed, for fixed glass distance 13–18,5 mm (1/2"-3/4")	2,500 (8' 2 7/16")	21290
		3,500 (11' 5 25/32")	21291
	Vertical seal 20/22, aluminum, anodized, for fixed glass with glass distance 20–22 mm (25/32"-7/8")	2,500 (8' 2 7/16")	20650
		3,500 (11' 5 25/32")	20651


### Accessories

		No.
	Bottom door stopper, with centering, stainless steel look	21473
	Bottom door stopper, with centering, chrome-plated, matt	20773
	Centering assembly grey, for all glass sliding doors	18619
	Centering assembly black, for all glass sliding doors, to wall profile	18663

### Wall connection


		mm (inch)	No.
	Wall profile, aluminum, anodized	2,500 (8' 2 7/16")	17020
		3,500 (11' 5 25/32")	17021
	Wall profile, aluminum, stainless steel look, brushed	2,500 (8' 2 7/16")	20119
		3,500 (11' 5 25/32")	20120
	Seal profile, black, for wall profile	2,500 (8' 2 7/16")	16452
		3,500 (11' 5 25/32")	16453

### Protective edge trims

		mm (inch)	No.
	Rubber profile self-adhesive, black, for 8–12,7 mm (5/16"-1/2") glass thickness, glass distance 4 mm	5,000 (16' 4 27/32")	19442
		10,000 (32' 9 11/16")	19443
		50,000 (164' 1/2 ")	19444
	Rubber profile self-adhesive, translucent, for 8–12,7 mm (5/16"-1/2") glass thickness, glass distance 4 mm	5,000 (16' 4 27/32")	19445
		10,000 (32' 9 11/16")	19446
		50,000 (164' 1/2 ")	19447


### Angled profile for wall mounting

The intelligent wall mounting with the angled profile for Hawa Junior running tracks for a door weight of up to 120 kg (264 lbs.).

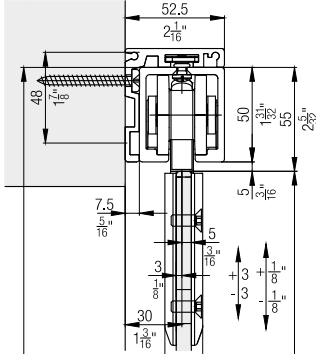


### Vertical sealing profile

The vertical sealing profile is effective against draughts. The slim aluminium profile affixes frontally to glass elements 8–12 mm (5/16" to 15/32") thick using silicone adhesive. The two-part rubber seal is recessed into the profile and it slides almost noiselessly and creates minimal resistance to motion.

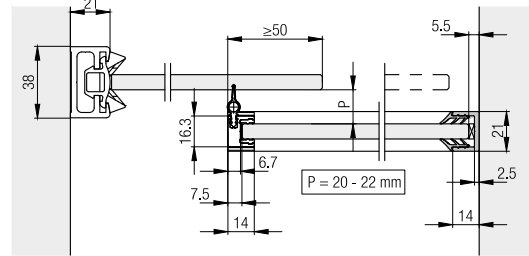


### Hawa Adapto 120 concrete casting system

The Hawa Adapto 120 concrete casting system can be easily and efficiently integrated into the building shell and allows Hawa Junior 120 running tracks to be installed flush with the ceiling.

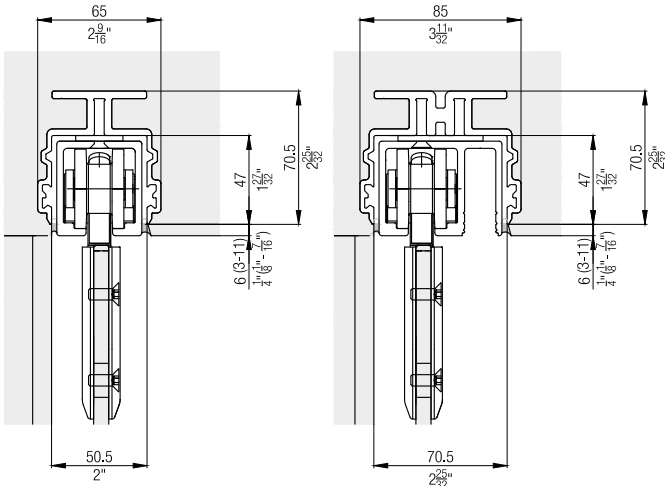


### Wall connection

Optimal wall connection for all-glass sliding doors with unprotected glass edge.

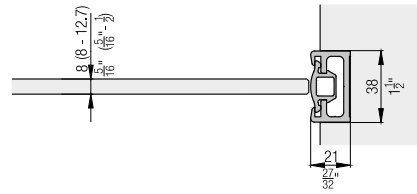


### Rubber profile for glass edge protection

The self-adhesive rubber profile, mounted on the glass edge, reduces draughts to a minimum and protects the glass edge from collisions of the all-glass sliding doors.

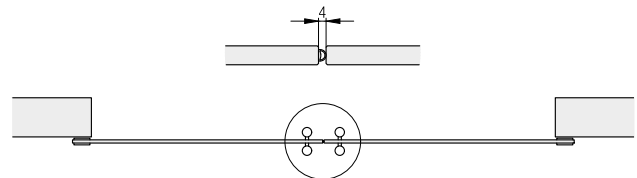

### Base/wall profile for fixed glazing



The retainer profile, placed on the floor or flush with the floor, ensures the stability of the fixed glass panels.

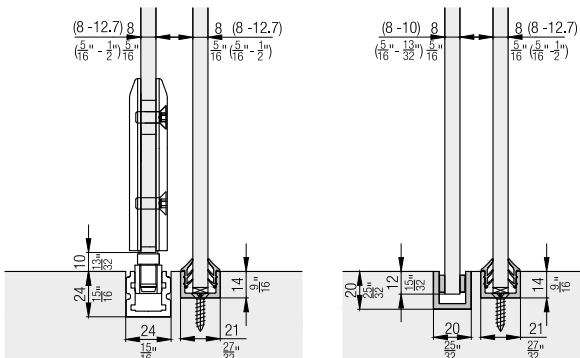



### SoftMove 120 soft closing mechanism

Completely integrated into the running track, the SoftMove decelerates sliding doors and draws them into their final position.

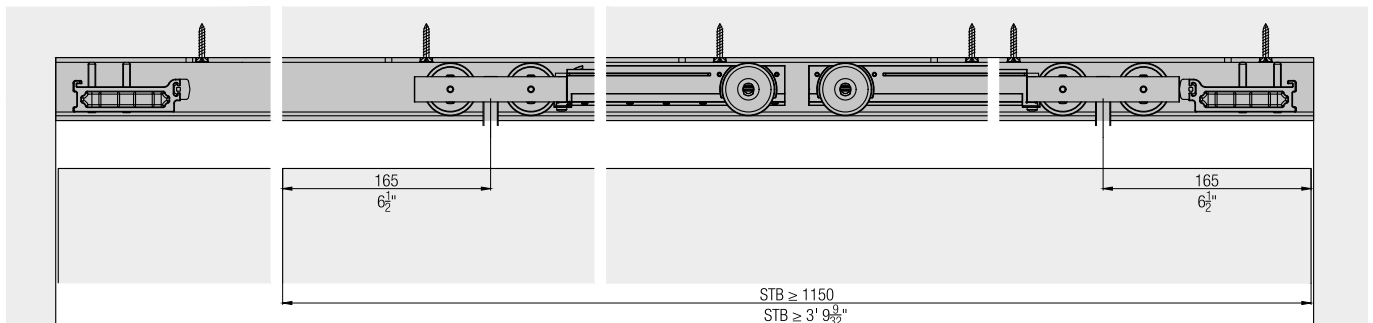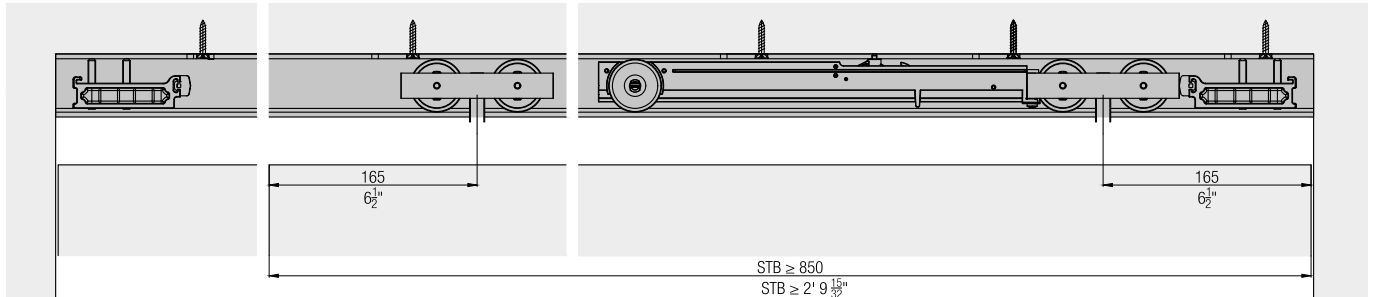

### Accessories

- Lock solutions from page 511
- General accessories from page 518
- Glass recommendations from page 536

### Planning/execution

Further information about the product can be found on [www.hawa.com](http://www.hawa.com).