Fitting for top-running wooden doors up to 250 kg (551 lbs.), with surface mounted running track or running track flush with the ceiling. Ceiling mounting. Minimal installation height.

Product highlights

Aesthetics Low installation height – only minimal gap between

door and running track

Comfort High quality, long-lasting friction bearing for quiet,

smooth running, even with heavier weights

Technical specifications

Max. 250 kg (551 lbs.)


↑ Max. 4000 mm (13'1 15/32'')


★ Max. 3000 mm (9'10 1/8'')

 \rightarrow [] \leftarrow 35–80 mm (1 3/8'' to 3 5/32'')



Installation examples

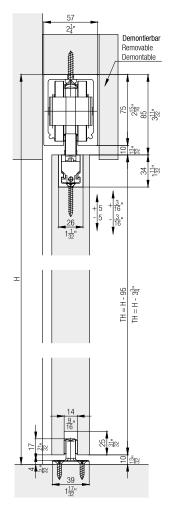

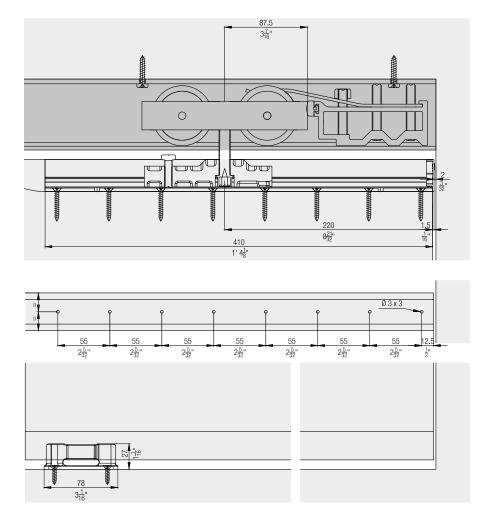

Set for 1 wooden door up to 250 kg (551 lbs.)

	No.
Hawa Junior 250 B, for 1 door	21001
Hawa Junior 250 B, with 2 track stoppers, for 1 door	26046

Set consisting of:		21001	26046	No.
	Two-wheeled running gear, M12, plastic wheels	2	2	20731
	Track stopper, with adjustable retention spring	1	2	20995
	Suspension profile, 410 mm (1'4 5/32"), plate with screw M12	2	2	21005
	Cover cap for glass suspension profile, plastic, anthracite	2	2	20907
	Bottom guide, zero tolerance, groove width 14 mm (9/16"), plastic	1	1	14711
9	Rubber buffer, 29x11 mm (1 5/32"x7/16"), for screw fixing	1	1	13114
2	Suspension assembly locking wrench	1	1	14861

Suspension profiles

For better distribution of the door weight, we recommend a continuous suspension profile for heavy sliding doors.

		mm (inch)	No.
	Multi purpose suspension and	6,500 (21' 3 29/32'')	10346
	retainer profile, aluminum, anodized, pre-drilled	cut to size	10347

Accessories

		No.
	Bottom door stopper, with centering, stainless steel look	21473
	Bottom door stopper, with centering, chrome-plated, matt	20773
İ.	Hawa assembly wegde, for 1 door	15770
	Connecting pins to profiles, 2-piece set	21347


Running tracks

	mm (inch)	No.
Running track, aluminum, anodized, pre-drilled	4,000 (13' 1 15/32'')	20988
	6,000 (19' 8 7/32'')	20612
	cut to size	20990

Guide tracks


	mm (inch)	No.
Guide track, for groove mounting, plastic, 5-piece set	3,000	14963

Further installation examples



Hawa Confort 160

The convenient solution to an old problem. Inadequate fastening options in brittle sub-floors or in the area of floor heating. This bottom guide is mounted on the wall.



Accessories

- Hawa Junior bottom guides for wall mounting from page 508
- General accessories from page 518

Planning/execution

Further information about the product can be found on www.hawa.com.