

**Fitting for top-running glass doors up to 40 kg (88 lbs.), with surface mounted running track. Optionally with soft and self closing mechanism. Wall or ceiling mounting.**

## Product highlights



## Productivity

Easy clamping mounting of the glass door to the suspension without a glass cut-out



## Comfort

Very quiet running and smooth sliding with high quality soft and self closing system

## Technical specifications



Max. 40 kg (88 lbs.)




Max. 4000 mm (13' 1 15/32")








Max. 3000 mm (9' 10 1/8")







8–12.7 mm (5/16" to 1/2")

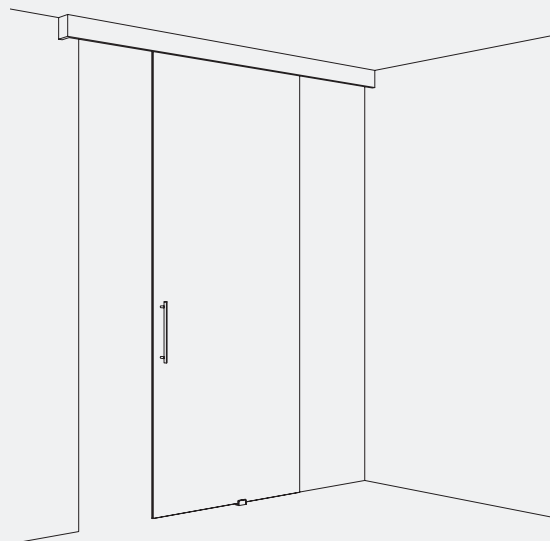





## Installation examples

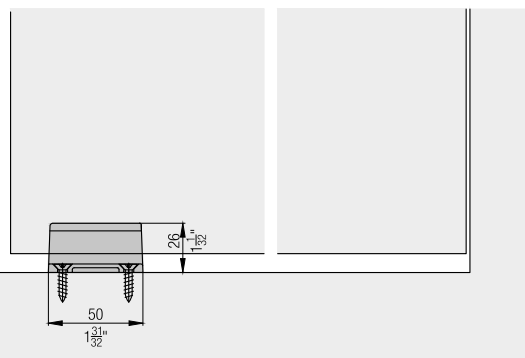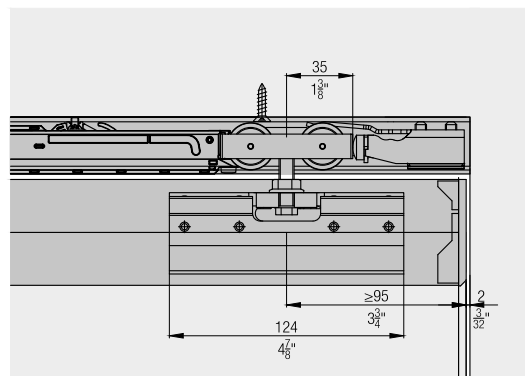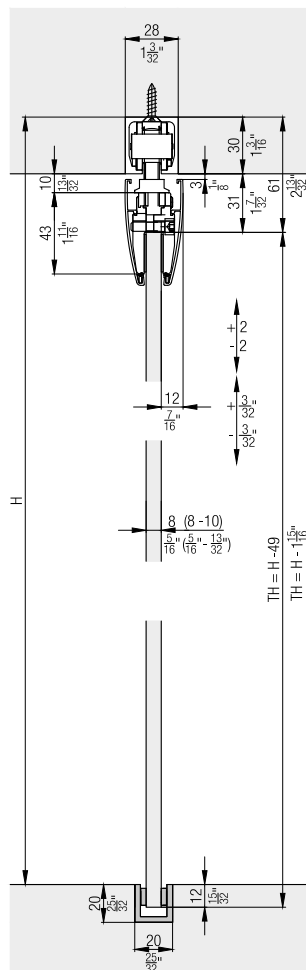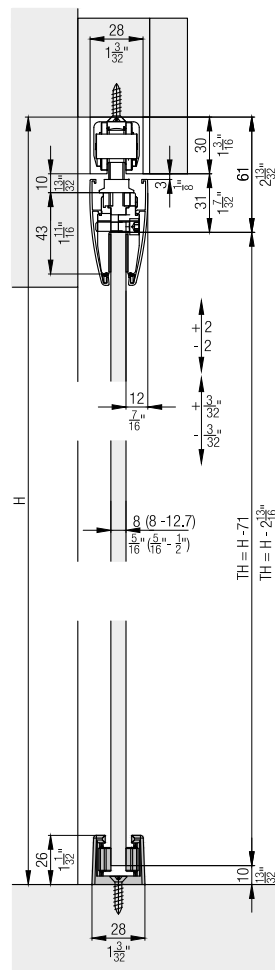


### Set for 1 glass door up to 40 kg (88 lbs.)

|   |  | No.     |
|---|--|---------|
| Hawa Junior 40 GS, for 1 door   |  | 25905   |
|   |  | No.     |
| <b>Set consisting of:</b>   |  | 25905   |
|  | Two-wheeled running gear, M8, plastic wheels | 2 25898 |
|  | Stopper, with adjustable retention spring    | 2 10640 |
|  | Clamping shoe, with suspension bolt M8       | 2 16131 |
|  | Screw-on rubber door stop                    | 1 10629 |


### Bottom guides

|   |   | No.   |
|---|---|-------|
|  | Sliders, for 10 mm glass (13/32"), self-adhesive, 6-piece set   | 16193 |
|  | Sliders, for 8 mm (5/16") glass, self-adhesive, 6-piece set   | 16192 |
|  | Bottom guide, rattle proof, with self-adhesive sliders for satinised glass, glass thickness 8–12.7 mm (5/16" to 1/2"), chrome-plated, matt  | 16029 |
|  | Bottom guide, rattle proof, with self-adhesive sliders for satinised glass, glass thickness 8–12.7 mm (5/16" to 1/2"), stainless steel look | 21267 |

### Running tracks


|   |  | mm<br>(inch)            | No.   |
|---|--|-------------------------|-------|
|  | Running track,<br>aluminum, anodized,<br>pre-drilled | 1,400<br>(4' 7 1/8 ")   | 10213 |
|   |  | 1,600<br>(5' 3 ")       | 10214 |
|   |  | 1,800<br>(5' 10 7/8 ")  | 10215 |
|   |  | 2,000<br>(6' 6 3/4 ")   | 10216 |
|   |  | 2,500<br>(8' 2 7/16")   | 25997 |
|   |  | 3,000<br>(9' 10 1/8 ")  | 18530 |
|   |  | 4,000<br>(13' 1 15/32") | 18531 |
|   |  | 6,000<br>(19' 8 7/32")  | 10211 |
|   |  | cut to<br>size          | 10217 |

### Guide tracks


|   |  | mm (inch)            | No.   |
|---|--|----------------------|-------|
|  | Guide track, aluminum, anodized, pre-drilled | 6,000 (19' 8 7/32 ") | 14414 |
|   |  | cut to size          | 14415 |

### Soft close SoftMove 40







For soft closing in opening and closing direction order 2 sets.

|   |                        | No.   |
|---|------------------------|-------|
|  | Soft close SoftMove 40 | 25987 |


### Panels

|   |  | mm (inch)            | No.          |
|---|--|----------------------|--------------|
|  | Clip-on panel, for clamping shoe, aluminum, anodized | 2,500 (8' 2 7/16 ")  | 057.3039.250 |
|   |  | 6,000 (19' 8 7/32 ") | 057.3039.600 |
|   |  | cut to size          | 057.3039.990 |



### End cap set

|   |   | No.          |              |
|---|---|--------------|--------------|
| End cap for panels  |   | 057.3061.072 |              |
|   |   | 057.3061.072 | No.          |
| <b>Set consisting of:</b>   |   |              |              |
|    | End cap, left for panel, plastique, anthracite              | 2            | 057.3059.001 |
|    | End cap, right for panel, plastique, anthracite             | 2            | 057.3059.002 |
|    | End cap holder, plastic, anthracite                         | 2            | 057.0141.001 |
|    | Clip to panel, plastic, gray                                | 4            | 057.3060.001 |
|   | Head cap screw, M5x18 mm (3/16"x23/32"), steel, zinc-plated | 8            | 600.0000.661 |
|  | Head cap screw, M5x20 mm (3/16"x25/32"), steel, zinc-plated | 8            | 763.0508.120 |



### Angled profiles for wall mounting

|   |   | mm<br>(inch)              | No.   |
|---|---|---------------------------|-------|
|  | Angled profile for wall mounting, aluminum, anodized, pre-drilled | 2,000<br>(6' 6 3/4 '')    | 18291 |
|   |   | 4,000<br>(13' 1 15/32 '') | 18634 |
|   |   | 6,000<br>(19' 8 7/32 '')  | 17691 |
|   |   | cut to size               | 17692 |


### Individual components to angled profile

|   |   | No.   |
|---|---|-------|
|  | Assembly set for wall mounting, 10-piece set          | 17785 |
|  | Cover cap, wall mounting, plastic, anthracite, 1 pair | 20015 |





### Wall connection

|   |   | mm<br>(inch)              | No.   |
|---|---|---------------------------|-------|
|  | Wall profile, aluminum, anodized                      | 2,500<br>(8' 2 7/16 '')   | 17020 |
|   |   | 3,500<br>(11' 5 25/32 '') | 17021 |
|   | Wall profile, aluminum, stainless steel look, brushed | 2,500<br>(8' 2 7/16 '')   | 20119 |
|   |   | 3,500<br>(11' 5 25/32 '') | 20120 |
|  | Seal profile, black, for wall profile                 | 2,500<br>(8' 2 7/16 '')   | 16452 |
|   |   | 3,500<br>(11' 5 25/32 '') | 16453 |

### Protective edge trims


|   |   | mm<br>(inch)               | No.   |
|---|---|----------------------------|-------|
|  | Rubber profile self-adhesive, black, for 8-12.7 mm (5/16" to 1/2") glass thickness, glass distance 4 mm       | 5,000<br>(16' 4 27/32 '')  | 19442 |
|   |   | 10,000<br>(32' 9 11/16 '') | 19443 |
|   |   | 50,000<br>(164' 1/2 '')    | 19444 |
|   | Rubber profile self-adhesive, translucent, for 8-12.7 mm (5/16" to 1/2") glass thickness, glass distance 4 mm | 5,000<br>(16' 4 27/32 '')  | 19445 |
|   |   | 10,000<br>(32' 9 11/16 '') | 19446 |
|   |   | 50,000<br>(164' 1/2 '')    | 19447 |
|   |   |                            |       |
|   |   |                            |       |

### Accessories

|   |  | No.   |
|---|--|-------|
|  | Bottom door stopper, with centering, stainless steel look              | 21473 |
|  | Bottom door stopper, with centering, chrome-plated, matt               | 20773 |
|  | Centering assembly grey, for all glass sliding doors                   | 18619 |
|  | Centering assembly black, for all glass sliding doors, to wall profile | 18663 |


### Angled profile for wall mounting

The intelligent wall mounting with the angled profile for Hawa Junior running tracks for a door weight of up to 40 kg (88 lbs.).




### Wall connection

Optimal wall connection for all-glass sliding doors with unprotected glass edge.

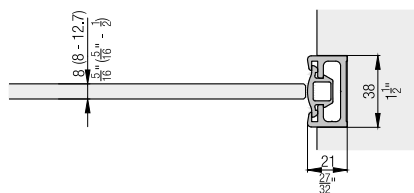



### Rubber profile for glass edge protection

The self-adhesive rubber profile, mounted on the glass edge, reduces drafts to a minimum and protects the glass edge from collisions of the all-glass sliding doors.

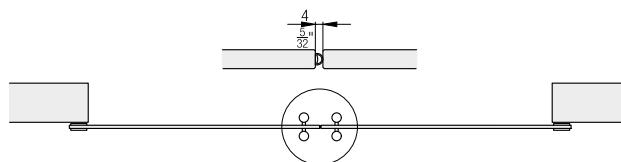

### SoftMove 40 soft closing mechanism

Completely integrated into the running track, the SoftMove decelerates sliding doors and draws them into their final position.

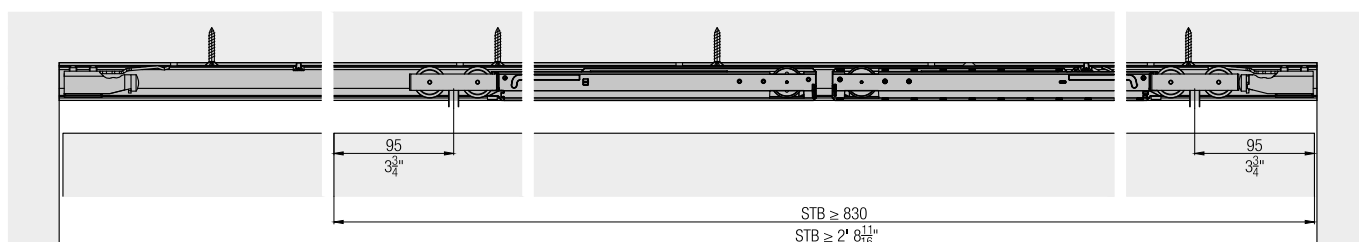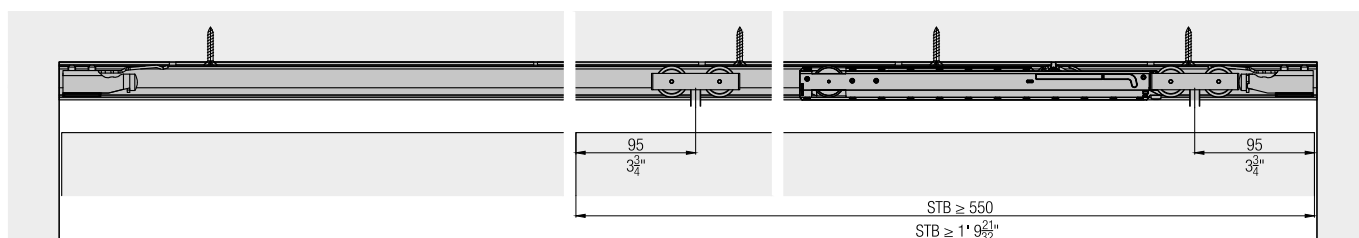

### Accessories

- Lock solutions from page 511
- General accessories from page 518
- Glass recommendations from page 536

### Planning/execution

Further information about the product can be found on [www.hawa.com](http://www.hawa.com).