








Fitting for top-running glass doors up to 40 kg (88 lbs.), with surface mounted running track. Optionally with soft and self closing mechanism. Ceiling mounting. Wall pocket solution.

Product highlights


-  **Productivity** Easy clamping mounting of the glass door to the suspension without a glass cut-out
-  **Aesthetics** The integrated spring stop gently pushes open sliding doors that are completely recessed in the wall pocket

Technical specifications

-  Max. 40 kg (88 lbs.)
-  Max. 4000 mm (13' 1 15/32")
-  Max. 1250 mm (4' 1 7/32")
-  8-12.7 mm (5/16" to 1/2")

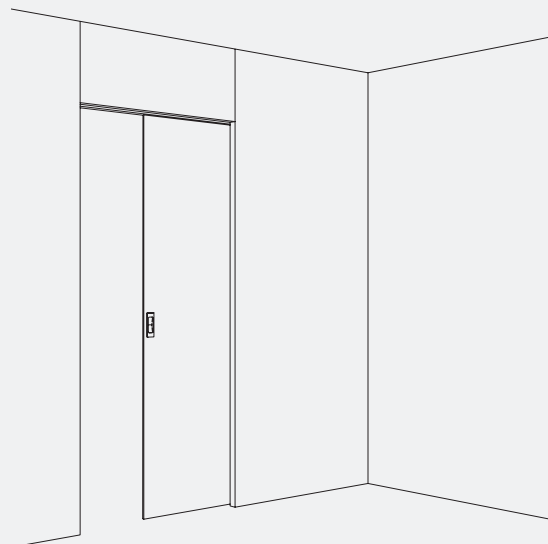





Installation examples

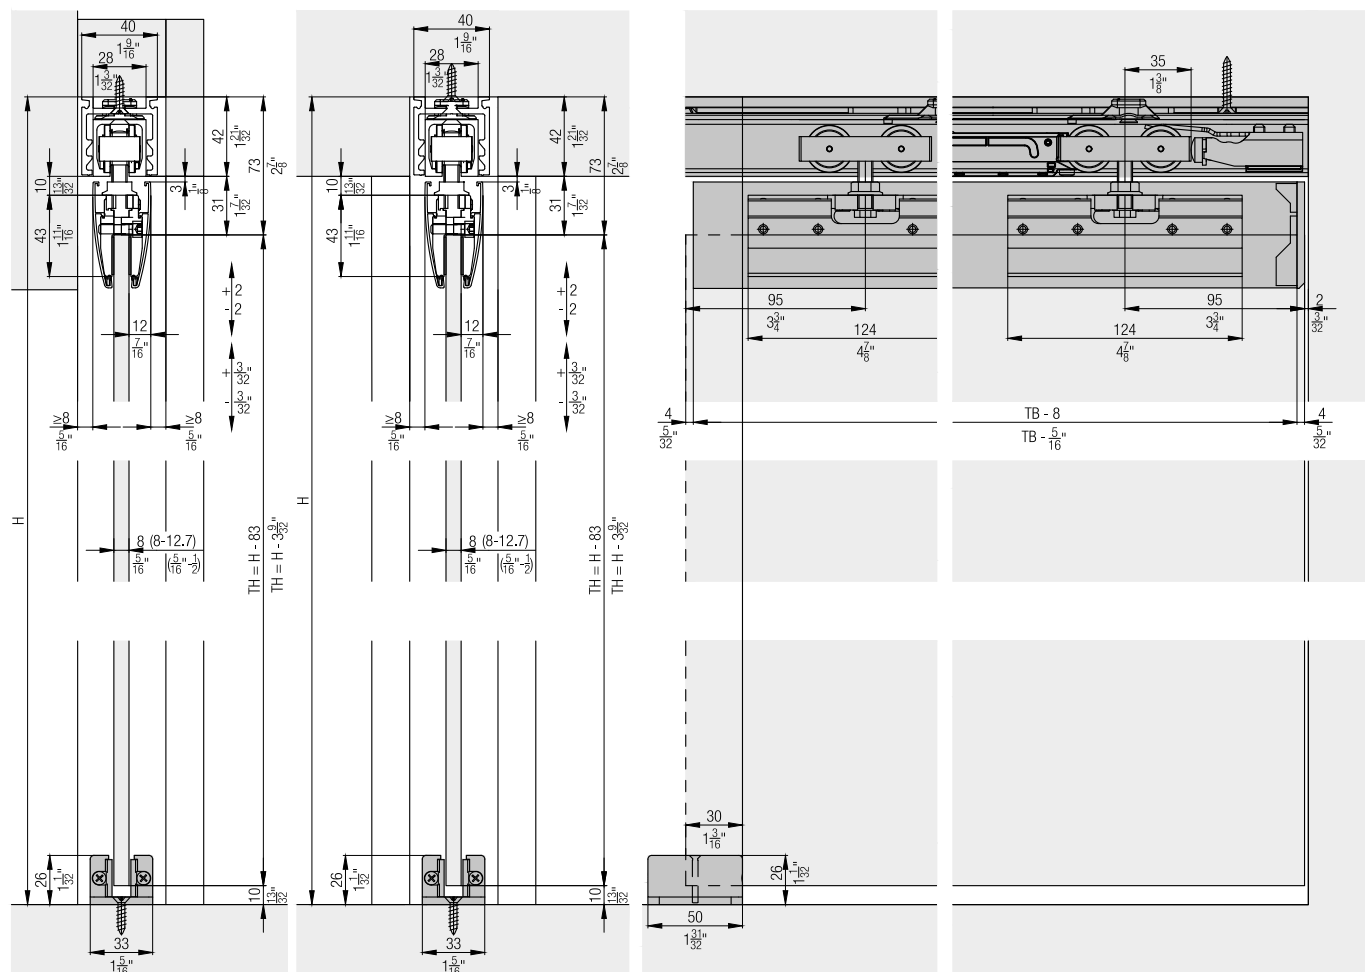


Set for 1 glass door up to 40 kg (88 lbs.)

	No.
Hawa Junior 40 GS, for 1 door	25905


Set consisting of:

		25905	No.
	Two-wheeled running gear, M8, plastic wheels	2	25898
	Stopper, with adjustable retention spring	2	10640
	Clamping shoe, with suspension bolt M8	2	16131
	Screw-on rubber door stop	1	10629

Running tracks

	No.
	Bottom guide, playfree adjustable, glass thickness 8–12.7 mm (5/16" to 1/2"), chrome-plated, mat
	057.3082.071





Running tracks

	mm (inch)	No.
	1,400 (4' 7 1/8 ")	10213
	1,600 (5' 3 ")	10214
	1,800 (5' 10 7/8 ")	10215
	2,000 (6' 6 3/4 ")	10216
	2,500 (8' 2 7/16 ")	25997
	cut to size	10217



Assembly set

	No.
Set for mountable and demountable running track, up to 2000 mm (6' 6 3/4")	25990
Set for mountable and demountable running track, up to 2500 mm (8' 2 7/16")	25992







Set consisting of:

	25990	25992	No.
	1		25913
	1		25989
		1	25914
		1	25991

Panels


	mm (inch)	No.
	2,000 (6' 6 3/4 ")	25985
	cut to size	27694
	2,500 (8' 2 7/16 ")	057.3039.250
	6,000 (19' 8 7/32 ")	057.3039.600
	cut to size	057.3039.990

End cap set



		No.	
End cap for panels		057.3061.072	
		057.3061.072	No.
Set consisting of:			
	End cap, left for panel, plastique, anthracite	2	057.3059.001
	End cap, right for panel, plastique, anthracite	2	057.3059.002
	End cap holder, plastic, anthracite	2	057.0141.001
	Clip to panel, plastic, gray	4	057.3060.001
	Head cap screw, M5x18 mm (3/16"x23/32"), steel, zinc-plated	8	600.0000.661
	Head cap screw, M5x20 mm (3/16"x25/32"), steel, zinc-plated	8	763.0508.120

Soft close SoftMove 40




For soft closing in opening and closing direction
order 2 sets.

		No.
	Soft close SoftMove 40	25987

Wall connection


		mm (inch)	No.
	Wall profile, aluminum, anodized	2,500 (8' 2 7/16")	17020
		3,500 (11' 5 25/32")	17021
	Wall profile, aluminum, stainless steel look, brushed	2,500 (8' 2 7/16")	20119
		3,500 (11' 5 25/32")	20120
	Seal profile, black, for wall profile	2,500 (8' 2 7/16")	16452
		3,500 (11' 5 25/32")	16453

Accessories

		No.
	Spring loaded stopper Hawa Junior 40	27200
	Centering assembly grey, for all glass sliding doors	18619
	Centering assembly black, for all glass sliding doors, to wall profile	18663

Calculations of running track length


The length of the running track must be shorter than the diagonal clearance (P2) by at least 80 mm (3 5/32").

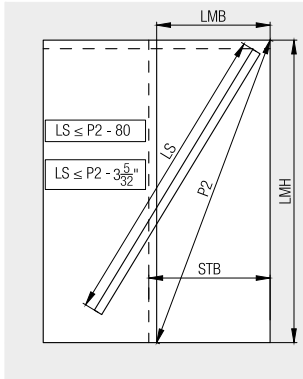

LMB = inside clearance
LMH = inside height
STB = sliding door width
P2 = diagonal clearance
LS = running track


Facing for the retainer profile

The optional clip-on panel made of aluminum can be clipped onto the retainer profile without additional fixing components. For invisible fastening of the lintel panelling, there is the option of covering the clip panel on site, using panels up to 40 mm (1 9/16") thick.




Detail rear door

Installation circumstances for bottom guide, rear suspension.

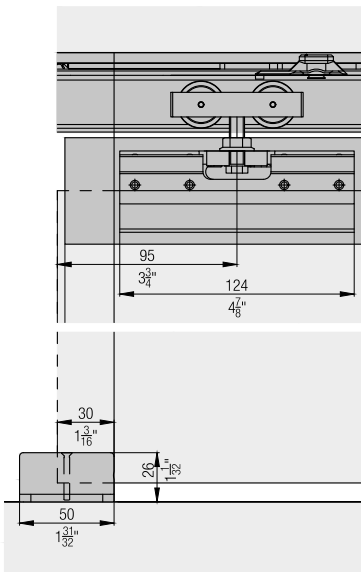


Spring stop

The specially developed spring stop for ejecting the door is integrated into the running track without visible fittings on the door edge.

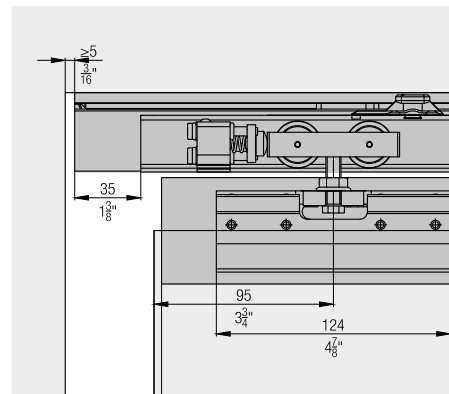


Wall connection

Optimal wall connection for all-glass sliding doors with unprotected glass edge.

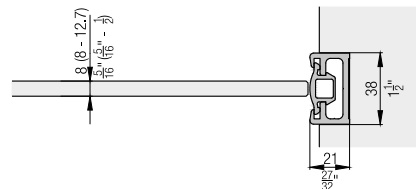

SoftMove 40 soft closing mechanism

Completely integrated into the running track, the SoftMove decelerates sliding doors and draws them into their final position.

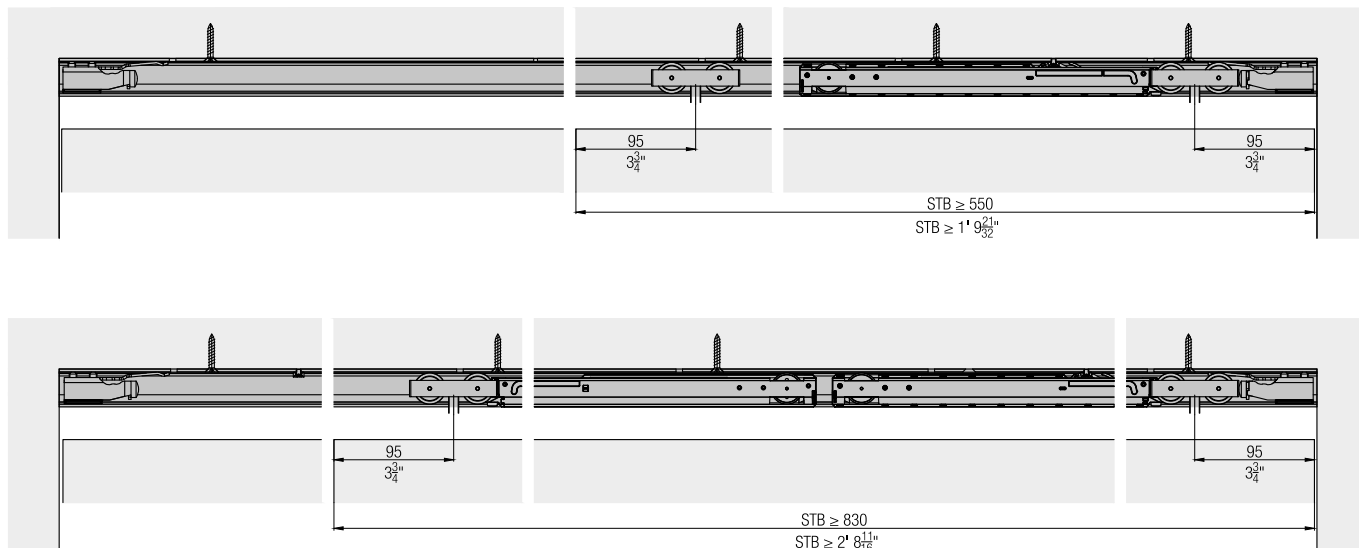

Accessories

- Lock solutions from page 511
- General accessories from page 518
- Glass recommendations from page 536

Planning/execution

Further information about the product can be found on www.hawa.com.