

Fitting for top-running glass doors up to 80 kg (176 lbs.), with surface mounted running track. Optionally with soft and self closing mechanism. Ceiling mounting. Wall pocket solution.

Product highlights



Productivity

Easy clamping mounting of the glass door to the suspension without a glass cut-out



Aesthetics

The integrated spring stop gently pushes open sliding doors that are completely recessed in the wall pocket

Technical specifications



Max. 80 kg (176 lbs.)




Max. 4000 mm (13' 1 15/32")






Max. 1200 mm (3' 11 1/4")




8–12.7 mm (5/16" to 1/2")

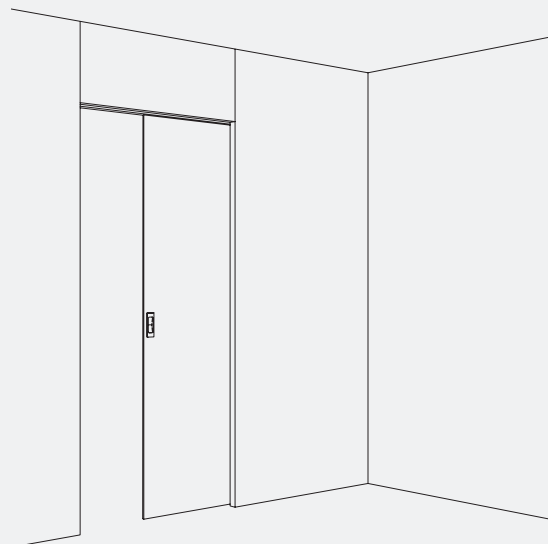

Installation examples

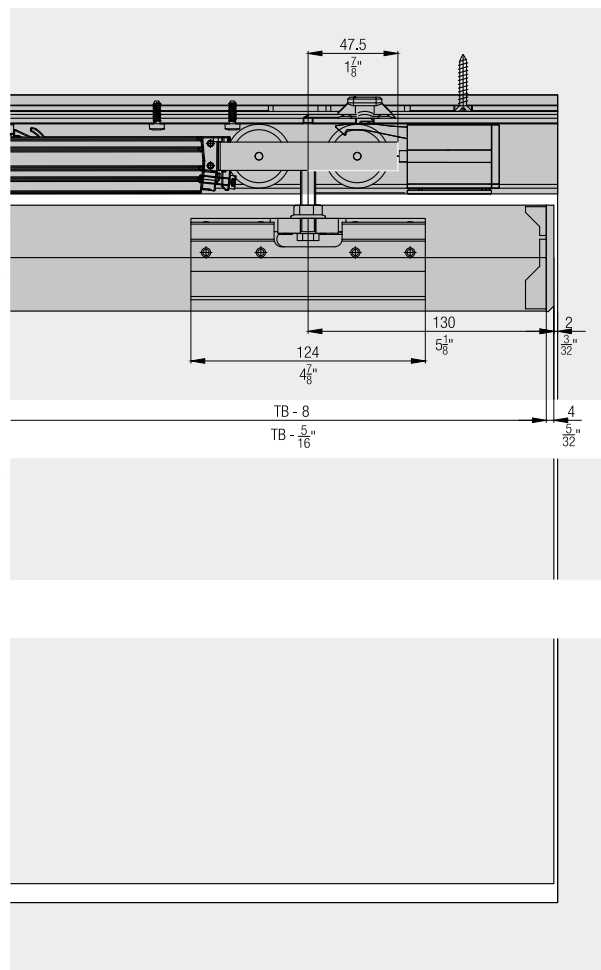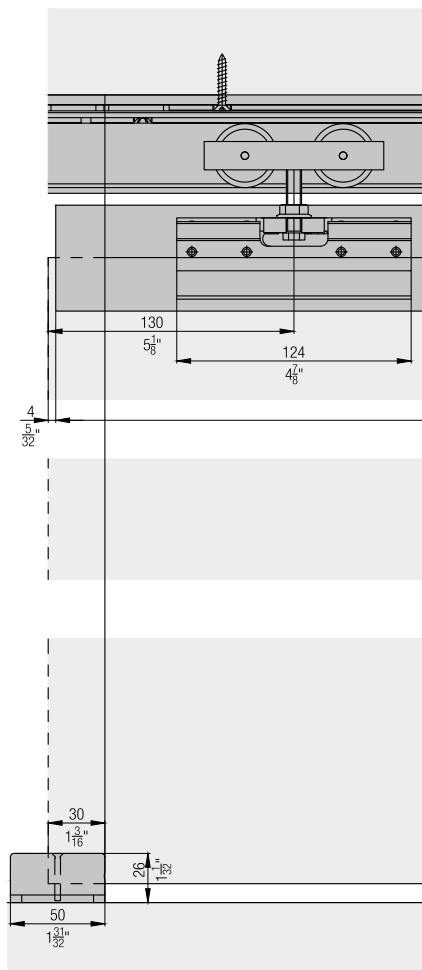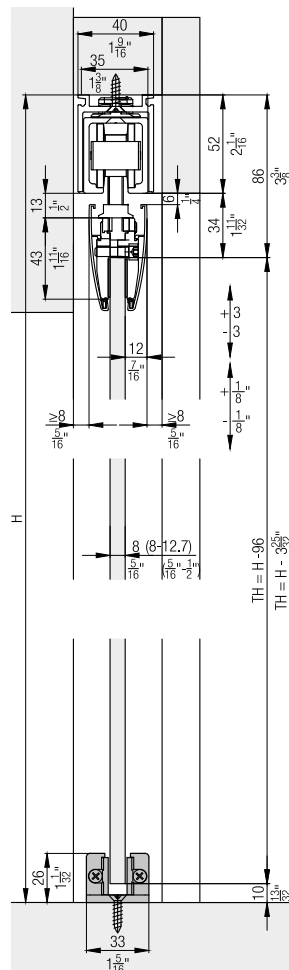





Further installation examples

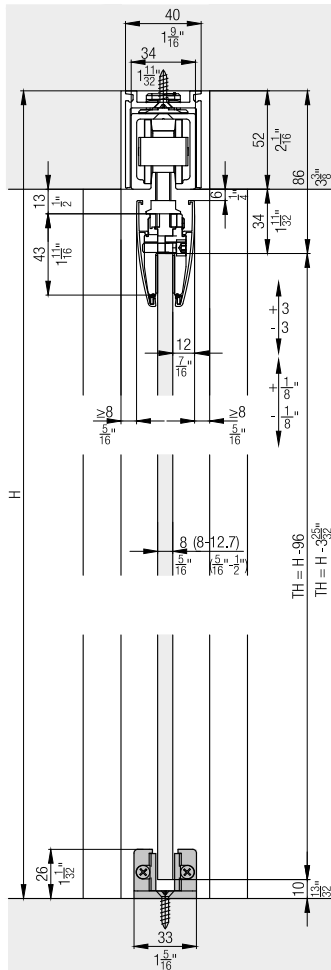


Set for 1 glass door up to 80 kg (176 lbs.)

	No.
Hawa Junior 80 GS, 1 door	17941


Set consisting of:

		17941	No.
	Running gear, 2-wheeled, M10, plastic wheels	2	10407
	Stopper Hawa Junior 80/100, with adjustable retention spring	2	30138
	Clamping shoe, with suspension bolt M10	2	16132
	Screw-on rubber door stop	1	10629

Running tracks

	No.
	057.3082.071



Running tracks

	mm (inch)	No.
	1,400 (4' 7 1/8 ")	10189
	1,600 (5' 3 ")	10190
	1,800 (5' 10 7/8 ")	10191
	2,000 (6' 6 3/4 ")	10192
	2,500 (8' 2 7/16 ")	10194
	3,000 (9' 10 1/8 ")	18532
	cut to size	10188

Assembly set, up to 2000 mm (6' 6 3/4")

	No.
Set for mountable and demountable running track	25207



Set consisting of:

	mm (inch)	25207	No.
	2,035 (6' 8 1/8 ")	1	25212
		1	25520

Assembly set, up to 2500 mm (8' 2 7/16")

	No.
Set for mountable and demountable running track	25371



Set consisting of:

	mm (inch)	25371	No.
	2,535 (8' 3 13/16 ")	1	25443
		1	25521



Assembly set, up to 3000 mm (9' 10 1/8")

	No.
Set for mountable and demountable running track	25441

Set consisting of:

	mm (inch)	25441	No.
	3,035 (9' 11 1/2 ")	1	25444
		1	25522







Panels

		mm (inch)	No.
	Clip-on panel, for fascia mounting, aluminum, anodized	2,000 (6' 6 3/4 ")	25445
		cut to size	27693
	Clip-on panel, for clamping shoe, aluminum, anodized	2,500 (8' 2 7/16 ")	057.3039.250
		6,000 (19' 8 7/32 ")	057.3039.600
		cut to size	057.3039.990

End cap set


	No.
End cap for panels	057.3061.072

Set consisting of:




		057.3061.072	No.
	End cap, left for panel, plastique, anthracite	2	057.3059.001
	End cap, right for panel, plastique, anthracite	2	057.3059.002
	End cap holder, plastic, anthracite	2	057.0141.001
	Clip to panel, plastic, gray	4	057.3060.001
	Head cap screw, M5x18 mm (3/16"x23/32"), steel, zinc-plated	8	600.0000.661
	Head cap screw, M5x20 mm (3/16"x25/32"), steel, zinc-plated	8	763.0508.120

Soft close




For soft closing in opening and closing direction
order 2 sets.

	No.
	Soft closing mechanism SoftMove 80 22444

Wall connection


		mm (inch)	No.
	Wall profile, aluminum, anodized	2,500 (8' 2 7/16 ")	17020
		3,500 (11' 5 25/32 ")	17021
	Wall profile, aluminum, stainless steel look, brushed	2,500 (8' 2 7/16 ")	20119
		3,500 (11' 5 25/32 ")	20120
	Seal profile, black, for wall profile	2,500 (8' 2 7/16 ")	16452
		3,500 (11' 5 25/32 ")	16453

Accessories

		No.
	Spring loaded stopper Hawa Junior 80/100	25370
	Centering assembly grey, for all glass sliding doors	18619
	Centering assembly black, for all glass sliding doors, to wall profile	18663

Calculations of running track length


The length of the running track must be shorter than the diagonal clearance (P2) by at least 80 mm (3 5/32").

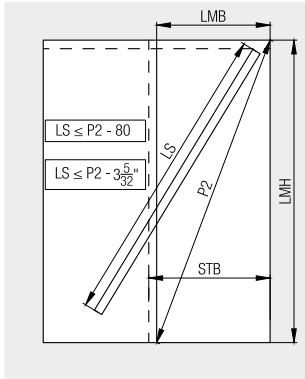


LMB = inside clearance
LMH = inside height
STB = sliding door width
P2 = diagonal clearance
LS = running track

Spring stop

The specially developed spring stop for ejecting the door is integrated into the running track without visible fittings on the door edge.

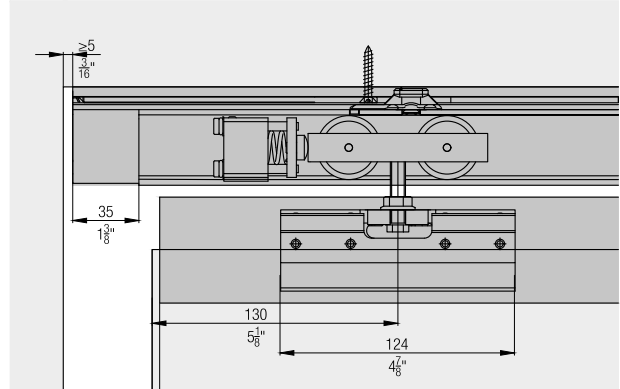


Detail rear door

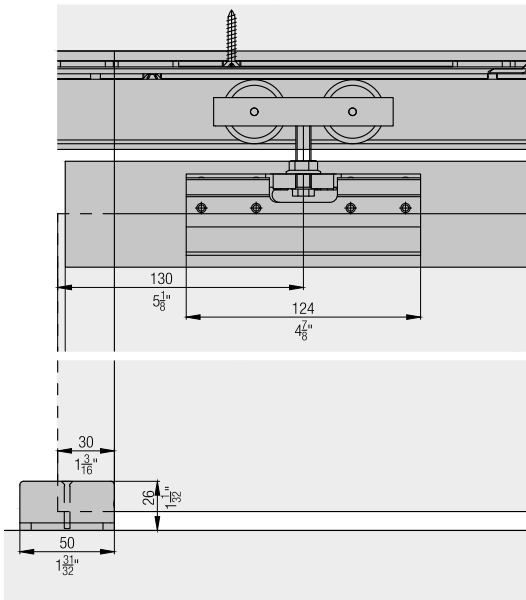


Wall connection

Optimal wall connection for all-glass sliding doors with unprotected glass edge.

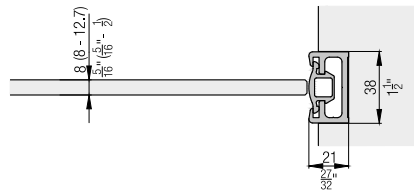


Facing for the retainer profile



SoftMove 80 soft closing mechanism

Completely integrated into the running track, the SoftMove decelerates sliding doors and draws them into their final position.

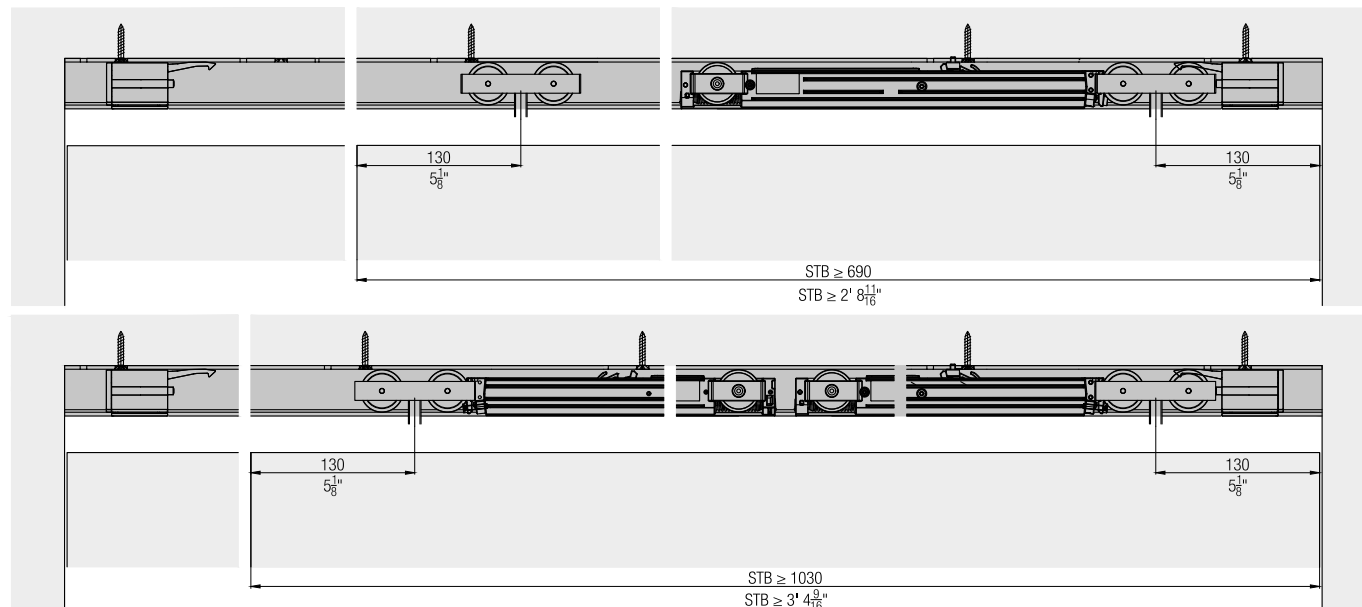

Accessories

- Lock solutions from page 513
- General accessories from page 520
- Glass recommendations from page 538

Planning/execution

Further information about the product can be found on www.hawa.com.