

Fitting for 2 symmetrically opening glass doors up to 80 kg (176 lbs.), with surface mounted running track or running track flush with the ceiling. Ceiling mounting.

Product highlights



Flexibility

Door openings up to 2280 mm (7'5 3/4 ")



Aesthetics

Symmetrical solution without guide track possible

Technical specifications



Max.

80 kg (176 lbs.)



Max.

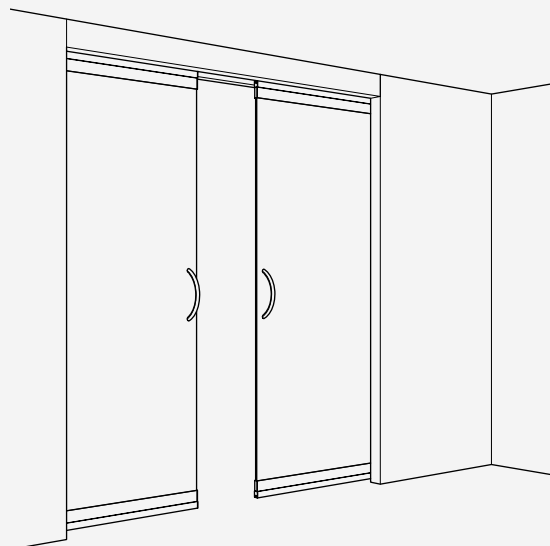
3000 mm (9'10 1/8")



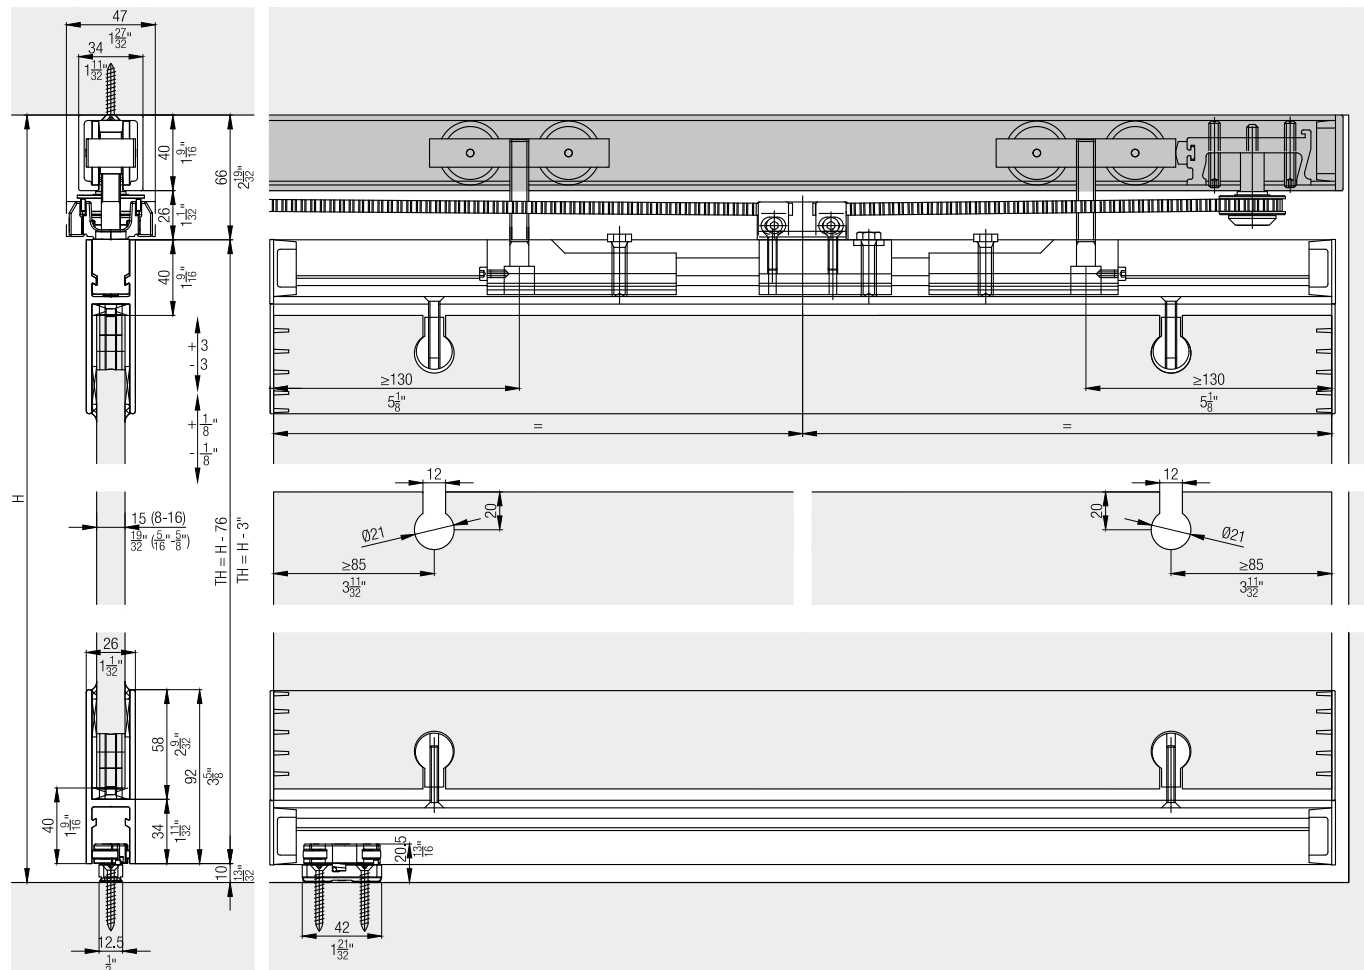
500–1200 mm (1'7 11/16" to 3'11 1/4")



8–16 mm (5/16" to 5/8")












Installation examples






Set for 2 glass door up to 80 kg (176 lbs.)

	No.
Hawa Junior 80 G Symmetric, for 2 doors	14557



Set consisting of:

		14557	No.
	Running gear, 2-wheeled, M10, ball bearings	4	30600
	Suspension plate, with suspension bolt M10	4	14543
	Stopper Hawa Junior 80/100, with adjustable retention spring	1	30138
	Pulley wheel Hawa Junior Symmetric/Telescopic	2	15788
	Clamp for toothed belt	2	15790
	Toothed belt 10 m (32' 9 11/16")	1	15712
	Cover cap for glass suspension profile, plastic, anthracite	4	20907
	Screw-on rubber door stop	2	10629
	Locking wrench to suspension	1	10778


Suspension and glass retaining profiles

		mm (inch)	No.
	Glass suspension/retainer profile, aluminum, anodized, brushed, glass up to 8–16 mm (5/16"–5/8")	6,500 (21' 3 29/32")	21783
		cut to size	21784
	Glass suspension/retainer profile, aluminum, glass up to 16 mm (5/8")	6,500 (21' 3 29/32")	13158
	Glass suspension/retainer profile, aluminum, glass up to 16 mm (5/18")	cut to size	13159
	Glass suspension/retainer profile, aluminum, anodized, brushed, glass up to 8–10 mm (5/16"–13/32")	6,500 (21' 3 29/32")	21781
		cut to size	21782
	Glass suspension/retainer profile, aluminum, glass up to 10 mm (13/32")	6,500 (21' 3 29/32")	10348
		cut to size	10349
	Multi purpose suspension and retainer profile, aluminum, anodized, undrilled	6,500 (21' 3 29/32")	10345
		cut to size	12915



Cover caps

	No.
 Cover cap for glass suspension/retainer profile 21783/21784/13158/13159, glass up to 16 mm (5/8"), plastic, anthracite	21085
 Cover cap for glass suspension/retainer profile 21781/21782/10348/10349, glass up to 10 mm (13/32"), plastic, anthracite	21512


Glass holder
Order 2 pieces per suspension and glass retaining profile

	No.
 Glass holder insert, plastic, with countersunk head screw, M6x30 mm (1/4"x1 3/16")	10792


Bottom guides

	No.
 Rattle-proof mounted guide, with wheels	24905
 Connecting bolt for bottom guide track, 6x40 mm (1/4"x1 9/16"), steel, zinc-plated	13759






Running tracks

		mm (inch)	No.
	Running track, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4 ")	10192
		2,200 (7' 2 5/8 ")	10193
		2,500 (8' 2 7/16 ")	10194
		3,000 (9' 10 1/8 ")	18532
		4,000 (13' 1 15/32 ")	18533
		6,000 (19' 8 7/32 ")	10186
		cut to size	10188

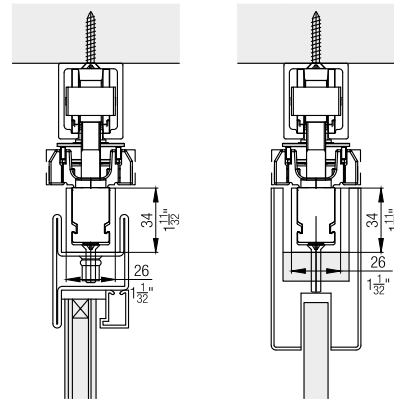
Guide tracks

		mm (inch)	No.
	Guide track, aluminum, anodized, pre-drilled	6,000 (19' 8 7/32 ")	13688
		cut to size	13690

Accessories

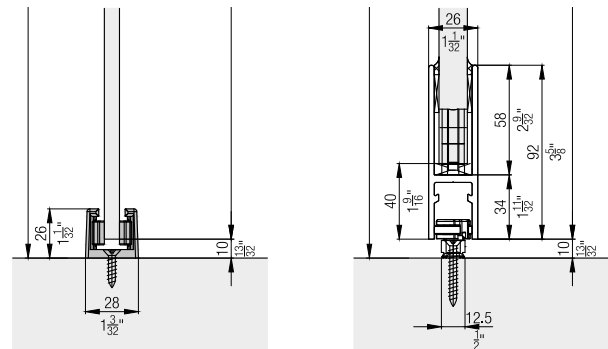
		No.
	Cover cap to running track, both sides, steel, chrome-plated, matt	24956
	Cover cap for glass suspension profile, plastic, anthracite	20907
	Bottom door stopper, with centering, stainless steel look	21473
	Bottom door stopper, with centering, chrome-plated, matt	20773
	Guide, rattle proof, with suspension block, plastic, 14 mm (9/16")	13781

Installation examples bottom guides



Individual solution

The suspension profile (12915) allows for the use of commercial as well as customer-specific suspension and glass retaining profiles.



Accessories

- Lock solutions from page 511
- General accessories from page 518
- Glass recommendations from page 536

Planning/execution

Further information about the product can be found on www.hawa.com.