



















**Set for ceiling mounting,  
for 1 glass door up to 100 kg (220 lbs.)**

			No.
Hawa Porta 100 G/GU/GM/GF, for 1 door			057.3074.071
			No.
<b>Set consisting of:</b>			057.3074.071
	Running gear, ball bearing, rollers plastic white	2	057.3114.071
	Stopper, with retention spring, plastic, gray	1	057.3073.072
	Stopper, without retention spring, plastic, gray	1	057.3073.071
	Suspension bolt, M8x32 mm (5/16"x1 1/4"), steel, zinc-plated	2	057.0123.104
	Hexagon locking nut, M8, steel, zinc-plated	2	768.9005.101
	Clamping shoe, aluminum, glass thickness 8–12.7 mm (5/16"-1/2")	2	057.3032.075
	Hexagon screw, M6x20 mm, plastic, white	2	762.9480.000
	Hexagon jam nut, M6, steel, zinc-plated	2	768.2001.101
	Bottom guide, playfree adjustable, chrome-plated, matt	1	057.3030.071
	Wall buffer, 19x10 mm (3/4"x13/32"), rubber, black	1	024.0002.046
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated	3	766.5042.120






**Running tracks**

		mm (inch)	No.
	Running track, aluminum, pre-drilled	1,700 (5' 6 15/16")	057.3016.170
		2,000 (6' 6 3/4 ")	057.3016.200
		2,500 (8' 2 7/16")	057.3016.250
		6,000 (19' 8 7/32")	057.3016.600
		cut to size	057.3016.990
	Running track, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4 ")	057.3016.201
		2,500 (8' 2 7/16")	057.3016.251
		6,000 (19' 8 7/32")	057.3016.601
		cut to size	057.3016.991
	Running track, with assembly opening, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	057.3016.256
		cut to size	057.3016.998
	Running track, ceiling integration, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	27668
		3,500 (11' 5 25/32")	27667
		6,000 (19' 8 7/32")	30326
		cut to size	27669
	Disposable cover to running track Hawa Porta 45/60/100, plastic, black	2,000 (6' 6 3/4 ")	057.3098.001
		cut to size	057.3098.990


### Assembly set

	No.
Assembly set Hawa Porta 60/100, 2000 mm (6' 6 3/4")	057.3179.200
Assembly set Hawa Porta 60/100, 2500 mm (8' 2 7/16")	057.3179.250
Assembly set Hawa Porta 60/100, 3000 mm (9' 10 1/8")	057.3179.300

### Set consisting of:

	mm (inch)	057.3179.200	057.3179.250	057.3179.300	No.
 Running track, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4")	1			057.3174.200
 Assembly pin, plastic, gray		9	11	13	057.0201.001
 Countersunk head screw, 5x40 mm (3/16"x1 9/16"), steel, zinc-plated		10	12	14	766.3054.140
 Running track, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")		1		057.3174.250
 Running track, aluminum, anodized, pre-drilled	3,000 (9' 10 1/8")			1	057.3174.300







### Panels

	mm (inch)	No.
 Clip-on panel, for clamping shoe, aluminum, anodized	2,500 (8' 2 7/16")	057.3039.250
	6,000 (19' 8 7/32")	057.3039.600
	cut to size	057.3039.990

### End cap set

	No.
End cap for panels	057.3061.072

### Set consisting of:





	057.3061.072	No.
 End cap, left for panel, plastique, anthracite	2	057.3059.001
 End cap, right for panel, plastique, anthracite	2	057.3059.002
 End cap holder, plastic, anthracite	2	057.0141.001
 Clip to panel, plastic, gray	4	057.3060.001
 Head cap screw, M5x18 mm (3/16"x23/32"), steel, zinc-plated	8	600.0000.661
 Head cap screw, M5x20 mm (3/16"x25/32"), steel, zinc-plated	8	763.0508.120

### Soft close

For soft closing in opening and closing direction  
order 2 sets.



	No.
Soft close Hawa Porta 100, Divido 100, 61–100 kg (133–220 lbs.), 1 piece	042.3102.071
Soft close Hawa Porta 60/100, Divido 100, 10–60 kg (22–132 lbs.), 1 piece	042.3102.072

### Set consisting of:





	042.3102.071	042.3102.072	No.
 Soft close, top running, 61–100 kg (133 to 220 lbs.), plastic	1		042.3106.071
 Trigger for soft close in buildings, zinc die casting	1	1	042.3105.001
 Screw set soft close	1	1	600.0000.566
 Soft close, top running, 10–60 kg (22 to 132 lbs.), plastic		1	042.3106.072

### Cover for assembly opening

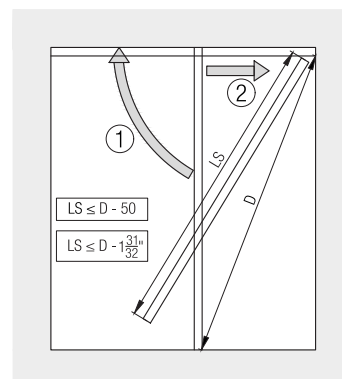
	No.
Cover cap to assembly opening, 1-piece set	042.3114.071

	042.3114.071	No.
<b>Set consisting of:</b>		
	Cover cap assembly opening, plastic, gray	1 042.0172.001
	Screw set soft close	1 600.0000.566


### Accessories

		No.
	Bottom door stopper, with centering, chrome-plated, matt	20773
	Routing jig for assembly opening	042.3118.071
	Groove cutter to routing jig, Ø= 10 mm (13/32"), hard metal	600.0000.309
	Track cleaner, plastic, blue	057.3099.071

### Track installation Pocket

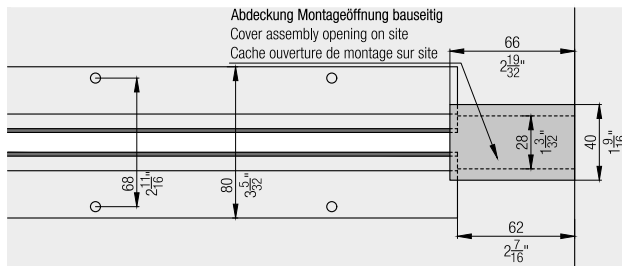
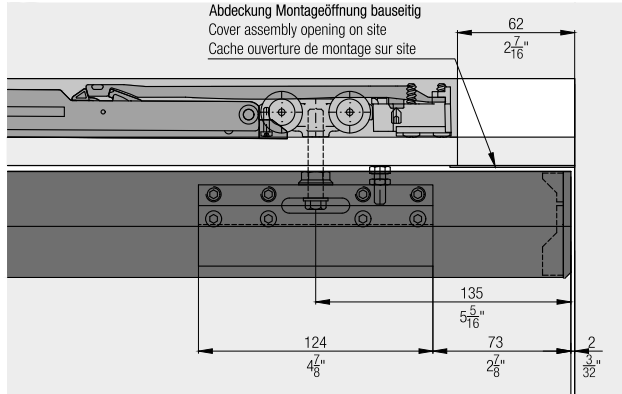
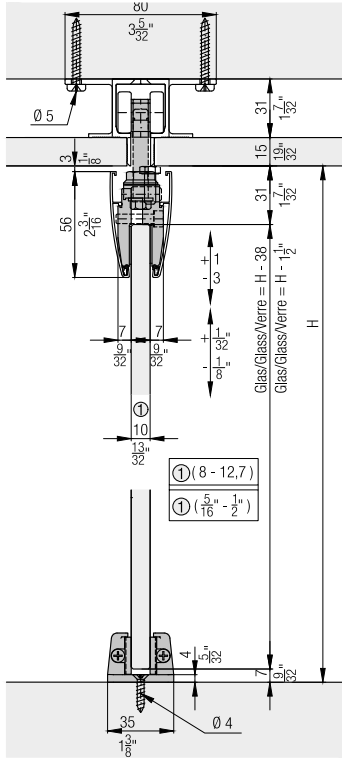


### Bottom door stopper






## Ceiling integration

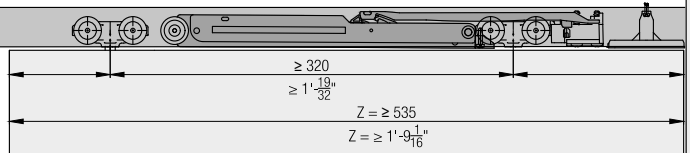
Recommendation: For systems integrated into the ceiling, provide assembly openings or front access to the system.







## Soft close



	Z =					
	1			2		
	0	1	2	0	1	2
Hawa Porta 60/100 H/H/C	1' $\frac{29}{32}$	1' $\frac{9}{16}$	1' $\frac{11}{16}$	2' $\frac{43}{64}$	2' $\frac{629}{32}$	2' $\frac{9}{32}$
Hawa Porta 60/100 HM/HMD/HMT	1' $\frac{629}{32}$	1' $\frac{9}{16}$	1' $\frac{11}{16}$	2' $\frac{43}{64}$	2' $\frac{629}{32}$	2' $\frac{9}{32}$
Hawa Porta 100 G/GU/GM/GMT	1' $\frac{629}{32}$	1' $\frac{9}{16}$	1' $\frac{11}{16}$	2' $\frac{43}{64}$	2' $\frac{629}{32}$	2' $\frac{9}{32}$
Hawa Porta 100 GF	1' $\frac{629}{32}$			2' $\frac{43}{64}$		
Hawa Porta 100 GW/GWF	1' $\frac{85}{32}$	1' $\frac{9}{16}$	1' $\frac{11}{16}$	2' 6"	2' $\frac{629}{32}$	2' $\frac{7}{16}$
Hawa Porta 100 GMD	1' $\frac{7}{32}$	1' $\frac{9}{32}$	1' $\frac{11}{16}$	2' $\frac{5}{16}$	2' $\frac{7}{16}$	2' $\frac{7}{16}$
Hawa Divido 100 H/HM/GR	1' $\frac{29}{32}$	1' $\frac{9}{16}$	1' $\frac{11}{16}$	2' $\frac{43}{64}$	2' $\frac{629}{32}$	2' $\frac{9}{32}$
Hawa Divido 100 GRM	1' $\frac{85}{32}$	1' $\frac{10}{32}$	1' 0 $\frac{1}{2}$	2' 6"	2' $\frac{85}{32}$	2' $\frac{10}{32}$



		Z =					
		1			2		
		0	1	2	0	1	2
Hawa Porta 60/100 H/Hc		480	535	590	730	785	840
Hawa Porta 60/100 HM/HMD/HMT		480	535	590	730	785	840
Hawa Porta 100 G/GU/GM/GMT		480	535	590	730	785	840
Hawa Porta 100 GF		480			730		
Hawa Porta 100 GW/GWF		512	542	590	762	792	840
Hawa Porta 100 GMD		488	539	590	738	789	840
Hawa Divido 100 H/HM/GR		480	535	590	730	785	840
Hawa Divido 100 GRM		512	567	622	762	817	872



Beidseitig gedämpfte Ausführungen ohne stirnseitigen Zugang erfordern zwei Montageöffnungen.  
Versions with soft closing mechanism at both sides without access from the leading edge require two assembly openings.  
Les versions avec amortissement bilatéral sans accès frontal exigent deux ouvertures de montage.


$$\begin{array}{r} \geq 570 \\ \hline \geq 1'-10\frac{7}{16}" \quad Z = \geq 840 \\ \hline Z = \geq 2'-9\frac{1}{16}" \end{array}$$

## Accessories

- Lock solutions from page 511
- General accessories from page 518
- Glass recommendations from page 536

## Planning/execution

Further information about the product can be found on [www.hawa.com](http://www.hawa.com).