Fitting for 2 synchronously opening glass doors up to 100 kg (220 lbs.), with surface mounted running track or running track flush with the ceiling. Wall or ceiling mounting.

Product highlights

♦ Flexibility

Standard applications can be extended with the

Synchro option

Comfort

Two simultaneously sliding doors make large,

fully accessible openings possible

Technical specifications

Max.

100 kg (220 lbs.)

↑ Max.

2700 mm (8'10 5/16")


<u>←</u>→ Max.

1200 mm (3'11 1/4")

 \rightarrow [

8-12.7 mm (5/16" to 1/2")

Installation examples

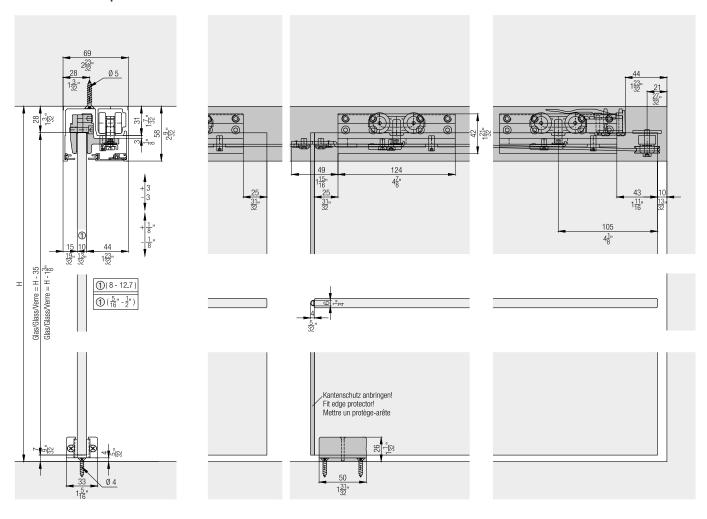

Set for ceiling or wall mounting, for 1 glass door up to 100 kg (220 lbs.) (order 2x)

			No.
Hawa Porta 100 GW, for 1 door			057.3091.071
Set consisting of:		057.3091.071	No.
	Running gear, ball bearing, rollers plastic white	2	057.3114.071
	Stopper, with retention spring, plastic, gray	1	057.3073.072
	Stopper, without retention spring, plastic, gray	1	057.3073.071
	Suspension bolt, M8x25 mm, flat head, steel, black	2	600.0000.473
	Clamping shoe, glass thickness 6–12.7 mm (1/4"-1/2"), aluminum	2	057.3087.071
	Bottom guide, playfree adjustable, glass thickness 8-12.7 mm (5/16"-1/2"), chrome-plated, mat	1	057.3082.071
(b)	Wall buffer, 19x10 mm (3/4"x13/32"), rubber, black	1	024.0002.046
	Clip for panel, every 300 mm (11 13/16"), plastic, gray, 12-piece set	1	057.3086.051
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated	3	766.5042.120

Synchro set

	No.			
Hawa Porta 100 GW/GWF Synchro				057.3092.071
Set consisting of: mm (inch)			057.3092.071	No.
6000	Cable holder, right, steel, zinc-plated		1	057.3088.171
.00	Cable holder, left, steel, zinc-plated		1	057.3088.172
	Deviating roller		2	057.3090.171
	Kevlar cable, D= 2.5 mm (3/32")	10,000 (32' 9 11/16'')	1	752.0059.104
	Protectiv edge trim, plastic, black	2,700 (8'10 5/16'')	1	057.3080.001
212	Head cap screw, M (3/16"x5/16"), steel, zinc-plated	15x8 mm	2	600.0000.171

Running tracks

		mm (inch)	No.
	Running track, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16'')	057.3083.250
/.//		3,500 (11' 5 25/32'')	057.3083.350
	p. 6 d	6,000 (19' 8 7/32'')	057.3083.600
	Running track,, aluminum, anodized, pre-drilled	cut to size 057.3083.990	
///	Wall mounting angle	2,500 (8' 2 7/16'')	057.3100.250
	profile, aluminum, anodized, pre-drilled	cut to size	057.3100.990
	Disposable cover Hawa Porta 100 GW/	2,000 (6' 6 3/4 '')	057.3089.001
	GWF, plastic, black	cut to size	057.3089.990

Screw set

			No.
Screw set for an	Screw set for angle profile, 12-piece set		057.3102.071
Set consisting	of:	057.3102.071	No.
212	Thread rolling countersunk head screw, M5x10 mm (3/16"x13/32"), steel, zinc-plated	12	600.0000.345

Panels

		mm (inch)	No.
	Panel profile, aluminum, anodized	2,500 (8' 2 7/16'')	057.3085.250
		3,500 (11' 5 25/32") 057.3085.3	
		6,000 (19' 8 7/32'')	057.3085.600
		cut to size	057.3085.990
	Screening seal for fascias, plastic, black	20,000 (65' 7 13/32'')	057.3078.002

End cap set

	No.
End cap set for angle profile, plastic, anthracite, with screws for tracks up to 2500 mm (8'2 7/16")	057.3103.071
End cap, ceiling mounting, plastic, anthracite	057.3118.071


Set consisting	of:	057.3103.071	057.3118.071	No.
	End cap, left, plastic, anthracite	1		057.3101.002
	End cap, right, plastic, anthracite	1		057.3101.001
	Screw set for angle profile, 12-piece set	1		057.3102.071
	End cap, ceiling mounting, plastic, anthracite		2	057.3118.001

Accessories


	No.
Bottom door stopper, with centering, chrome-plated, matt	20773
Milling jig Hawa Porta 100 GW/ GWF (Synchro)	057.3094.001
Groove cutter to routing jig, Ø= 10 mm (13/32"), hard metal	600.0000.309
Track cleaner, plastic, blue	057.3099.071


Hawa Porta 100 GW Synchro

Wall mounting




Ceiling integration






Bottom door stopper



Calculations

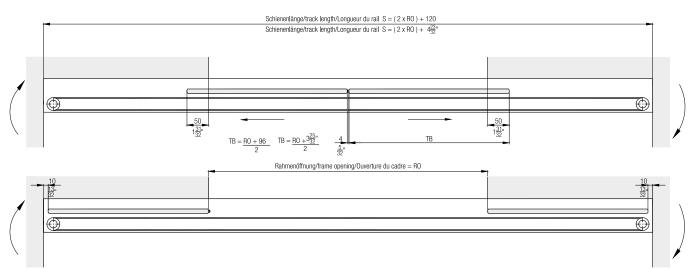

Accessories

- Lock solutions from page 511
- General accessories from page 518
- Glass recommendations from page 536

Planning/execution

Further information about the product can be found on www.hawa.com.