Fitting for 2 synchronously opening glass doors up to 100 kg (220 lbs.), with surface mounted running track. Wall or ceiling mounting.

Product highlights

♦ Flexibility Standard applications can be extended with

the Synchro option


Comfort Two simultaneously sliding doors make large,

fully accessible openings possible


Technical specifications


Мах. 100 kg (220 lbs.) Мах. 2700 mm (8'10 5/16") 1200 mm (3'11 1/4") Max.


8-12.7 mm (5/16" to 1/2") $\rightarrow \, \, \Big[($

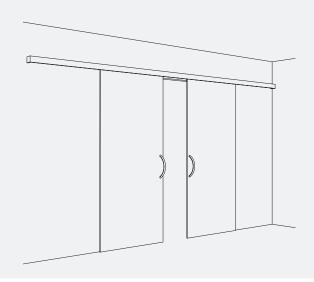



Installation examples

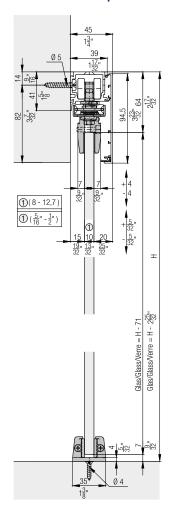

















Set for ceiling or wall mounting, for 1 glass door up to 100 kg (220 lbs.) (order 2x)

9 (2				
	No.			
Hawa Porta 100 G/GU/GM/GF, for 1 door			057.3074.071	
Set consisting	of:	057.3074.071	No.	
	Running gear, ball bearing, rollers plastic white	2	057.3114.071	
	Stopper, with retention spring, plastic, gray	1	057.3073.072	
	Stopper, without retention spring, plastic, gray	1	057.3073.071	
6	Suspension bolt, M8x32 mm (5/16"x1 1/4"), steel, zinc-plated	2	057.0123.104	
8	Hexagon locking nut, M8, steel, zinc-plated	2	768.9005.101	
	Clamping shoe, aluminum, glass thickness 8–12.7 mm (5/16"-1/2")	2	057.3032.075	
	Hexagon screw, M6x20 mm, plastic, white	2	762.9480.000	
	Hexagon jam nut, M6, steel, zinc-plated	2	768.2001.101	
	Bottom guide, playfree adjustable, chrome-plated, matt	1	057.3030.071	
(b)	Wall buffer, 19x10 mm (3/4"x13/32"), rubber, black	1	024.0002.046	
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated	3	766.5042.120	

Synchro set

			No.	
Hawa Porta 100 G Synchro, for 2 doors			057.3075.071	
Set consisting	of:	mm (inch)	057.3075.071	No.
	Cable holder, alum	inum	1	057.0130.071
	Mounting plate, ste	eel,	2	057.0144.101
	Deviating roller, ba	ll bearing	2	055.0101.001
	Cable safety, steel, ted	zinc-pla-	2	056.0124.101
	Kevlar cable, D= 2.5 mm (3/32")	10,000	1	752.0059.104
	Protectiv edge trim, plastic, black	2,700 (8'10 5/16'')	1	057.3080.001
	PT Rounded head screw, 5x12 mm (3/16"x15/32"), steel, zinc-plated		2	762.9456.100
	Head cap screw, M5x16 mm (3/16"x: steel, zinc-plated	5/8"),	2	763.0512.116

Running tracks

	mm (inch)	No.
	1,700 (5' 6 15/16'')	057.3048.170
Combi running track, aluminum, pre-drilled	2,000 (6' 6 3/4 '')	057.3048.200
	2,500 (8' 2 7/16'')	057.3048.250
	3,500 (11' 5 25/32'')	057.3048.350
	6,000 (19' 8 7/32'')	057.3048.600
	cut to size	057.3048.990

Panels

	mm (inch)	No.
Clip-on panel, aluminum, anodized	2,500 (8'2 7/16'')	057.3050.250
	3,500 (11'5 25/32'')	057.3050.350
	6,000 (19'8 7/32'')	057.3050.600
	cut to size	057.3050.990
Screening seal for fascias, plastic, black	20,000 (65' 7 13/32'')	057.3078.002

Clip-on components

	No.
Clip component for wooden and aluminum panel, every 500 mm (1'7 11/16"), aluminium, pre-drilled	057.3117.001

Panel end component set, 44.5 mm (1 25/32"), aluminum

	No.
Panel end component set, 44.5 mm (1 25/32"), one-sided, wall mounting	057.3052.074

Set consisting	of:	057.3052.074	No.
	Panel end component, 44.5 mm (1 25/32"), alu- minum, anodized	1	057.3052.904
	Screw, M4x2.6 mm (5/32"x 1/8"), steel, zinc-plated	4	011.0101.171
0 0	Bracker connector, steel, zinc-plated	2	057.3051.101

Panel end component set, 50 mm (1 31/32"), aluminum

			No.
Panel end component set, 50 mm (1 31/32"), one-sided, ceiling mounting			057.3052.071
Set consisting of:		057.3052.071	No.
	Panel end component, 50 mm (1 31/32"), aluminum, anodized	1	057.3052.901
000	Bracker connector, steel, zinc-plated	2	057.3051.101
⑤	Screw, M4x2.6 mm (5/32"x 1/8"), steel, zinc-plated	4	011.0101.171


Bottom guide Adjustable without play for wall mounting

	No.
Bottom guide wall mounting, adjustable free from play	057.3015.175

Accessories


	NO.
Bottom door stopper, with centering, chrome-plated, matt	20773
Track cleaner, plastic, blue	057.3099.071

Wooden panels

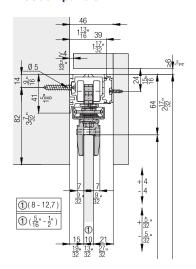



Hawa Porta 100 G Synchro

Calculations of panels

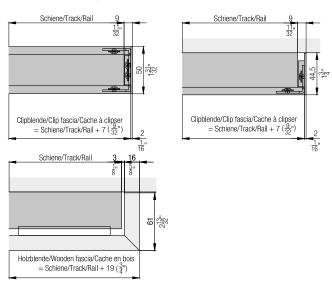


Bottom guide with zero clearance







Bottom door stopper



Calculations of panels

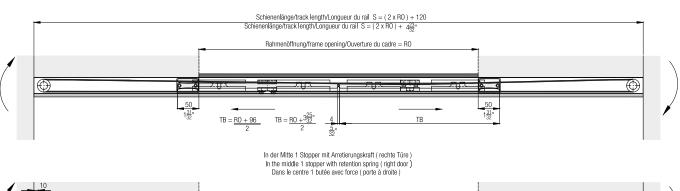



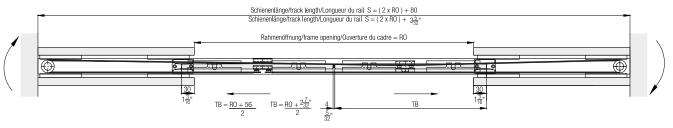



Accessories

- Lock solutions from page 511
- General accessories from page 518
- Glass recommendations from page 536

Planning/execution

Further information about the product can be found on www.hawa.com.