

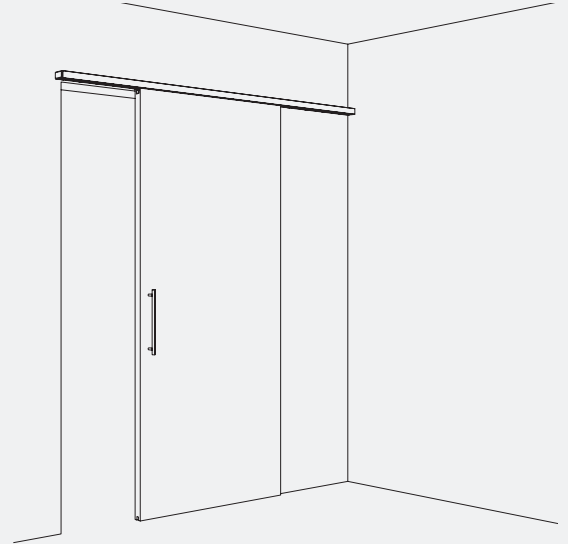
Fitting for top-running wooden doors up to 100 kg (220 lbs.), with surface mounted running track. Optionally with soft and self closing mechanism. Wall mounting. Minimal installation height.

Product highlights

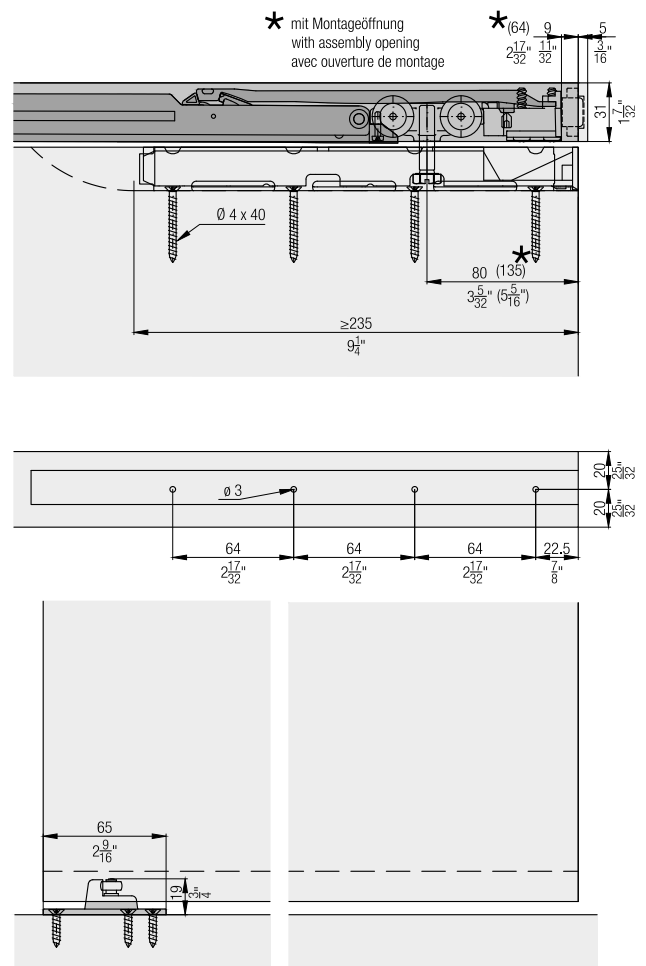
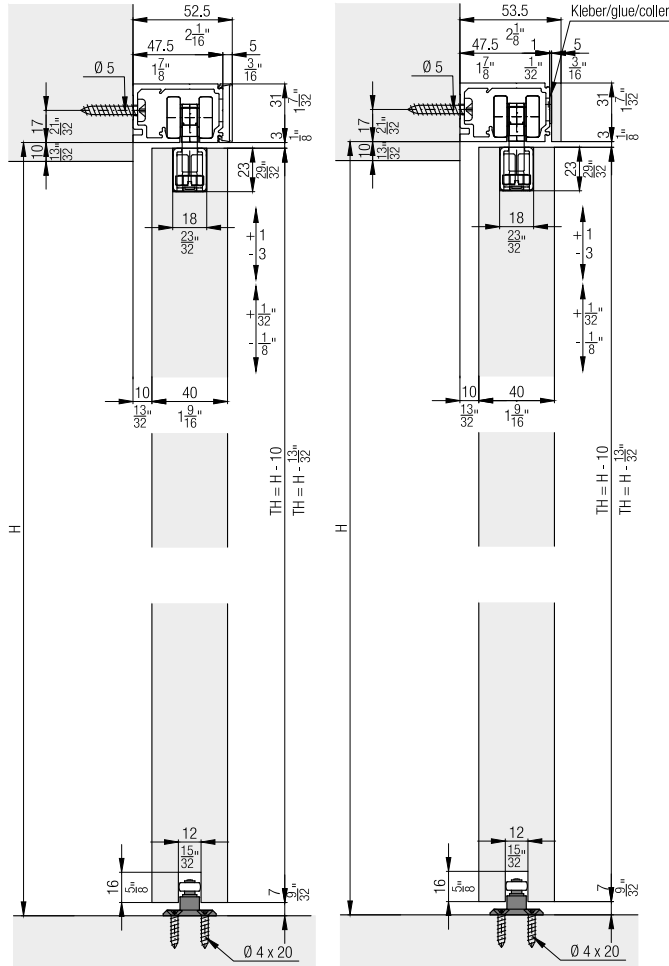
- Flexibility** Aluminium panel or customer-provided wooden panelling integrated in the system
- Productivity** Tool-less door mounting
- Aesthetics** Also available in black as a "Black Edition" design option for a particularly attractive appearance

Technical specifications

- Max. 100 kg (220 lbs.)
- Max. 2700 mm (8' 10 5/16")
- Max. 1600 mm (5' 3")
- 30–45 mm (1 3/16" to 1 25/32")





Installation examples



**Set for wall mounting,
for 1 wooden door up to 100 kg (220 lbs.)**

	No.
Hawa Porta 100 HM/HMD and Hawa Divido 100 HM, minimal installation height, for 1 door	057.3133.071
Hawa Porta 100 HMD, black, minimal installation height, for 1 door	057.3133.085

Set consisting of:

		057.3133.071	057.3133.085	No.
	Running gear, ball bearing, rollers, plastic, white	2	2	057.3114.071
	Stopper, with retention spring, plastic, gray	2		057.3073.072
	Hexagon head screw, M8x36 mm (5/16"x1 13/32"), steel, zinc-plated	2	2	042.0165.101
	Cover cap, plastic, grey	2	2	600.0000.533
	Running gear holder, plastic, anthracite	2	2	042.0167.001
	Housing, steel, zinc-plated	2	2	042.0166.101
	Countersunk head screw, 4x40 mm (5/32"x1 9/16"), steel, zinc-plated	8	8	766.5040.140
	Bottom guide, with roller, adjustable, plastic, anthracite	1	1	057.3120.071
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated	4		766.5042.120
	Stopper, with retention spring, plastic, black		2	057.3073.076
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated		4	600.0000.817






**Set for wall mounting,
for 1 wooden door up to 100 kg (220 lbs.)**

	No.
Hawa Porta 100 HMD, minimal installation height, with running track and panel, 1996 mm (6' 6 19/32"), aluminum, anodized, for 1 door	057.3137.071



Set consisting of:

		mm (inch)	057.3137.071	No.
	Running gear, ball bearing, rollers, plastic, white		2	057.3114.071
	Stopper, with retention spring, plastic, gray		2	057.3073.072
	Hexagon head screw, M8x36 mm (5/16"x1 13/32"), steel, zinc-plated		2	042.0165.101
	Cover cap, plastic, grey		2	600.0000.533
	Running gear holder, plastic, anthracite		2	042.0167.001
	Housing, steel, zinc-plated		2	042.0166.101
	Countersunk head screw, 4x40 mm (5/32"x1 9/16"), steel, zinc-plated		8	766.5040.140
	Bottom guide, with roller, adjustable, plastic, anthracite		1	057.3120.071
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated		4	766.5042.120
	Fixation clip for wooden and aluminum panel, 2-piece set		1	057.3126.071
	End cap, plastic, anthracite		1	057.3131.071
	Track cleaner, plastic, blue		1	057.3099.071
	Single running track, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4 ")	1	057.3112.199
	Running track, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4 ")	1	057.3113.199

Running tracks

		mm (inch)	No.
	Running track, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	057.3112.250
		3,500 (11' 5 25/32")	057.3112.350
		6,000 (19' 8 7/32")	057.3112.600
		cut to size	057.3112.990
	Running track, aluminum, black anodized, pre-drilled	2,500 (8' 2 7/16")	057.3112.255
		3,500 (11' 5 25/32")	057.3112.355
		cut to size	057.3112.990
	Running track, extended spacing of +9 mm (11/32") between door and wall, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	30617
		6,000 (19' 8 7/32")	30618
		cut to size	30668
	Running track, extended spacing of +20 mm (25/32") between door and wall, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	30619
		6,000 (19' 8 7/32")	30620
		cut to size	30669
	Disposable cover to running track Hawa Divido 100 / Hawa Porta 45/60/100, plastic, black	2,000 (6' 6 3/4 ")	057.3098.001
		cut to size	057.3098.990




Panels

		mm (inch)	No.
	Clip-on panel, wall mounting, aluminum, anodized	2,500 (8' 2 7/16")	057.3113.250
		3,500 (11' 5 25/32")	057.3113.350
		6,000 (19' 8 7/32")	057.3113.600
		cut to size	057.3113.990
	Clip-on panel, wall mounting, aluminum, black anodized	2,500 (8' 2 7/16")	057.3113.255
		3,500 (11' 5 25/32")	057.3113.355

End cap set for running track 057.3112.xxx

	No.
End cap set, with fixation clip, plastic, anthracite	057.3131.072
End cap set, with fixation clip, plastic, black	057.3131.075


Set consisting of:

		057.3131.072	057.3131.075	No.
	End cap, plastic, anthracite	1		057.3131.071
	Fixation clip for wooden and aluminum panel, steel, zinc-plated	2	2	057.3126.101
	End cap set, plastic, black		1	057.3131.076

Fixing clamp for the end pieces of wooden or aluminum panels

	No.
Fixation clip for wooden and aluminum panel, 2-piece set	057.3126.071



Set consisting of:

		057.3126.071	No.
	Fixation clip for wooden and aluminum panel, steel, zinc-plated	2	057.3126.101

Panel end component set, 95 mm (3 3/4"), can be shortened, plastic, wall mounting

	No.
Panel end component set, with fixation clip, 95 mm (3 3/4"), plastic, anthracite	30485

Set consisting of:





		30485	No.
	Panel end component, 95 mm (3 3/4"), plastic, anthracite, can be shortened	2	30133
	Fixation clip for wooden and aluminum panel, steel, zinc-plated	2	057.3126.101

Soft close

For soft closing in opening and closing direction
order 2 sets.

	No.
Soft close Hawa Porta 100, Divido 100, 61-100 kg (133 to 220 lbs.), 1 piece	042.3102.071
Soft close Hawa Porta 60/100, Divido 100, 10-60 kg (22 to 132 lbs.), 1 piece	042.3102.072



Set consisting of:

	042.3102.071	042.3102.072	No.
 Soft close, top running, 61-100 kg (133 to 220 lbs.), plastic	1		042.3106.071
 Trigger for soft close in buildings, zinc die casting	1	1	042.3105.001
 Screw set soft close	1	1	600.0000.566
 Soft close, top running, 10-60 kg (22 to 132 lbs.), plastic		1	042.3106.072


Cover for assembly opening

	No.
Cover cap to assembly opening, 1-piece set	042.3114.071




Set consisting of:

	042.3114.071	No.
 Cover cap assembly opening, plastic, gray	1	042.0172.001
 Screw set soft close	1	600.0000.566

Bottom guide set for wall mounting

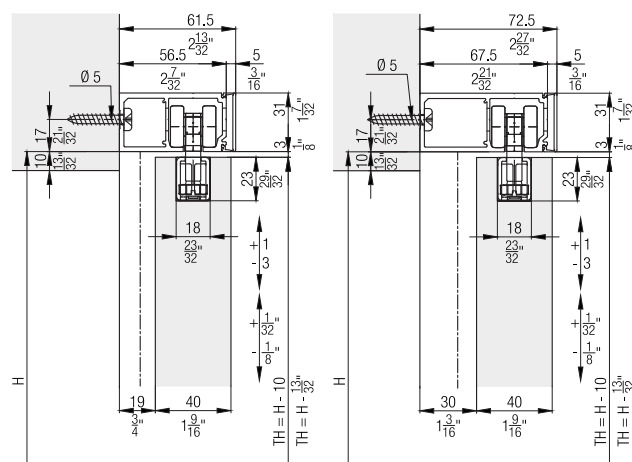
	No.
 Set bottom guide for wall mounting, with roller	057.3128.171

Accessories

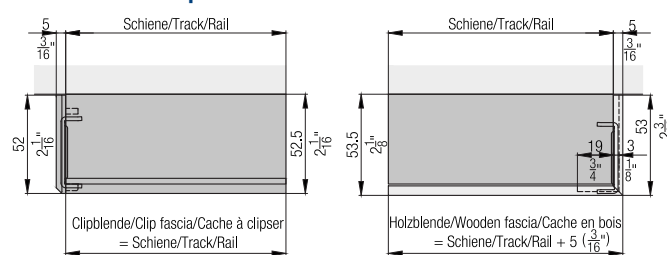
	No.
 Routing jig for assembly opening	042.3118.071
 Groove cutter to routing jig, Ø= 10 mm (13/32"), hard metal	600.0000.309
 Track cleaner, plastic, blue	057.3099.071

Further installation examples

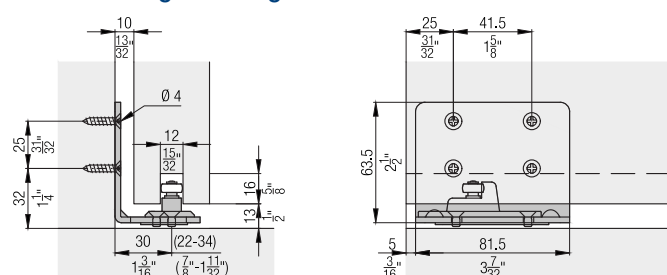
Wall mounting rails with extended spacing of +9 mm/+20 mm (11/32"/25/32") between door and wall.



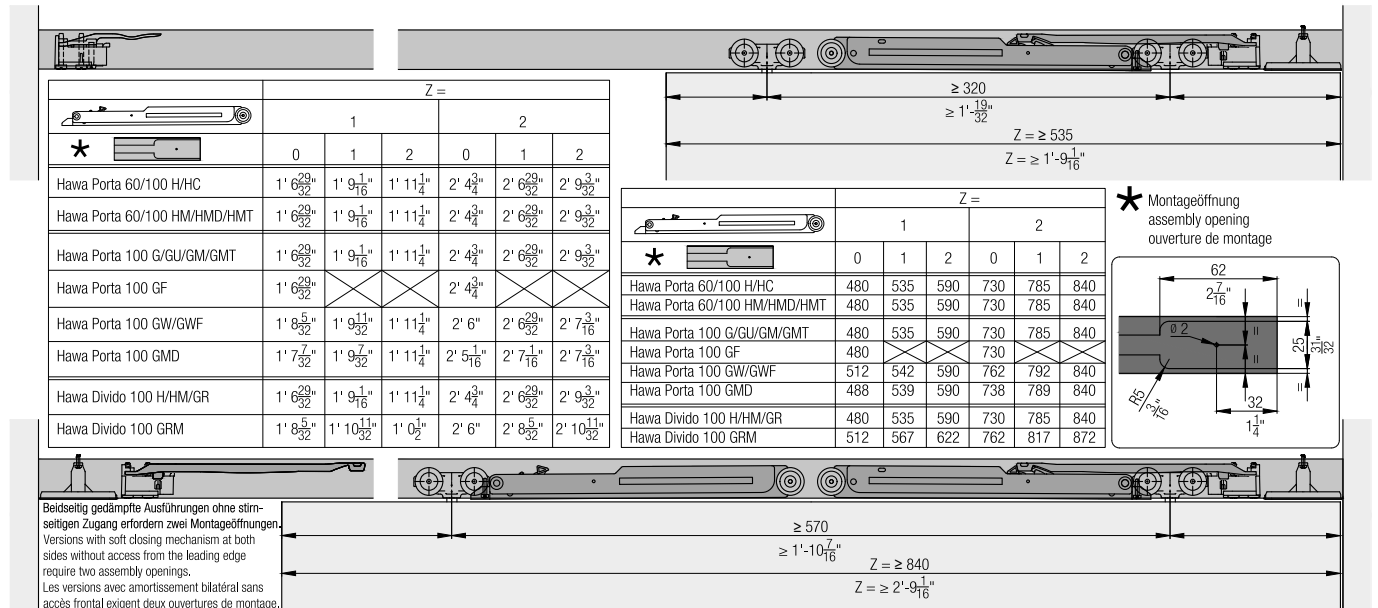
Calculations of panels



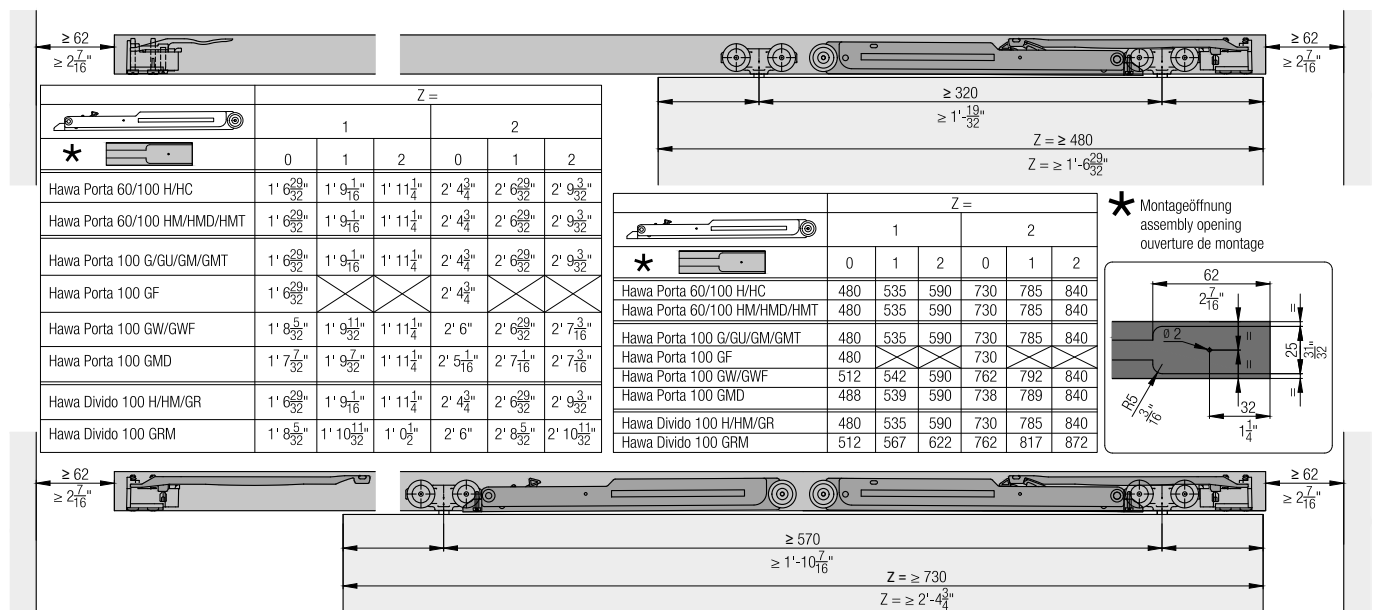
Wall mounting bottom guide



Soft close



Soft close



Accessories

- Lock solutions from page 511
- General accessories from page 518

Planning/execution

Further information about the product can be found on www.hawa.com.