







Fitting for top-running wooden doors up to 300 kg (660 lbs.), with surface mounted running track. Wall or ceiling mounting.

Product highlights


-  **Flexibility** Three or four point guidance for maximum stability
-  **Comfort** Even heavy doors close smoothly and quietly thanks to the ball bearing rollers

Technical specifications

-  Max. 300 kg (660 lbs.)
-  Max. 4000 mm (13'1 15/32")
-  Max. 4000 mm (13'1 15/32")
-  40–80 mm (1 9/16" to 3 5/32")

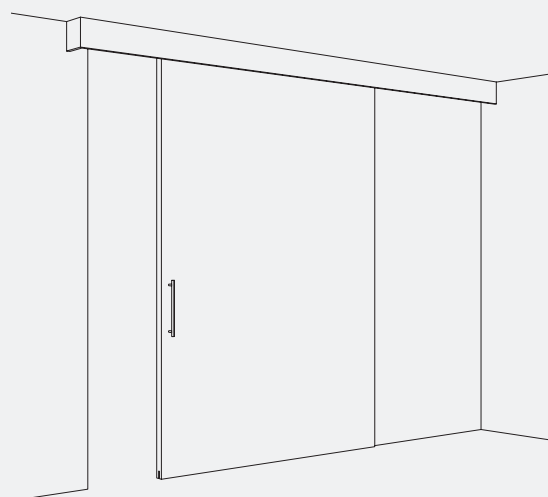

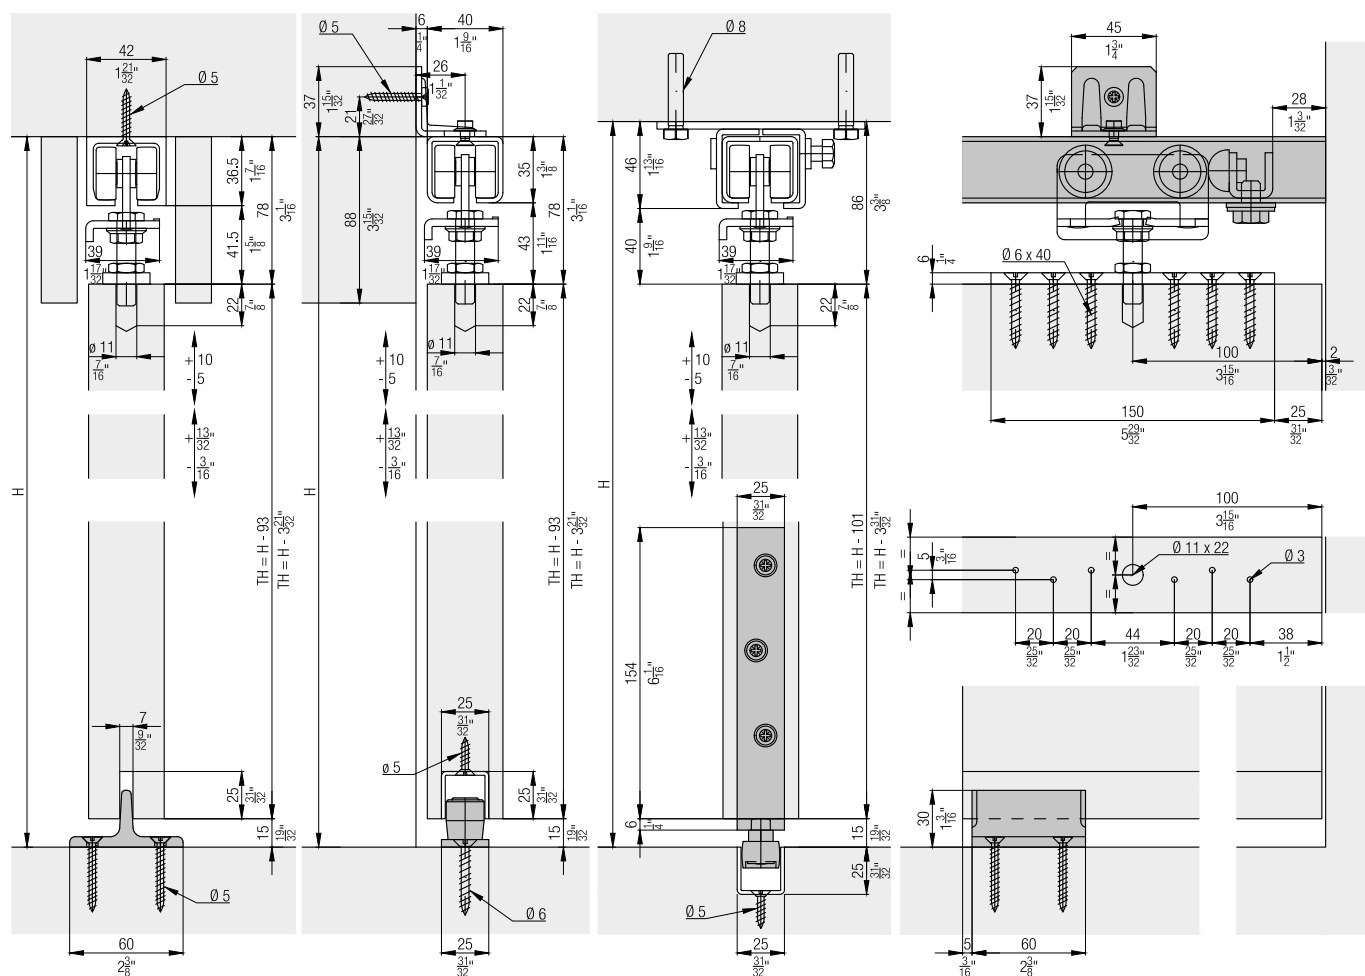





Installation examples





**Set for ceiling or wall mounting,
for 1 wooden door up to 300 kg (660 lbs.)**

	No.
Hawa Porta 300 H, for 1 door	058.3000.171


Set consisting of:

		058.3000.171	No.
	Running gear, ball bearings, rollers plastic white	2	058.3005.171
	Stopper, with rubber buffer, steel, zinc-plated	1	058.3008.171
	Suspension bolt, M10x45 mm (13/32"x1 25/32"), steel, zinc-plated	2	058.3006.171
	Support bracket, steel, zinc-plated	2	058.3009.101
	T bottom guide, steel, zinc-plated	1	058.3011.101
	Screw set	1	058.0103.171

Running tracks

		mm (inch)	No.
	Running track, steel, pre-drilled	3,000 (9' 10 1/8 ")	058.3002.300
		6,000 (19' 8 7/32 ")	058.3002.600
		cut to size	058.3002.990
	Running track, aluminum, anodized, pre-drilled	3,000 (9' 10 1/8 ")	058.3016.300
		6,000 (19' 8 7/32 ")	058.3016.600
		cut to size	058.3016.990




Guide tracks

		mm (inch)	No.
	Guide track, steel, zinc-plated, pre-drilled	6,000 (19' 8 7/32 ")	058.3013.600
		cut to size	058.3013.990






Bracket set for wall mounting

	No.
Angle bracket for wall mounting, steel, zinc-plated, 10-piece set	057.3005.172


Set consisting of:

		057.3005.172	No.
	Wall mounting angle bracket, steel, zinc-plated	10	057.0169.101
	Countersunk head screw, M5x12 mm (3/16"x15/32"), steel, zinc-plated	10	762.5008.100
	Hexagon nut, M5, steel, zinc-plated	10	768.9025.100


Accessories

		No.
	Bottom guide pin, for screw fixing, for 058.3010.101, 20 mm (25/32")	058.3015.171
	Bottom guide roller, 20 mm (25/32"), steel, zinc-plated	058.3012.171
	Soffit suspension bracket, for 058.3002.300/600, every 500 mm (1'7 11/16"), steel, zinc-plated	058.3001.171
	Supporting angle bracket/ bottom guide, steel, zinc-plated	058.3010.101
	Track connecting U-piece for 058.3002.300/600, steel, zinc-plated, pre-drilled	058.3004.101

Further installation examples

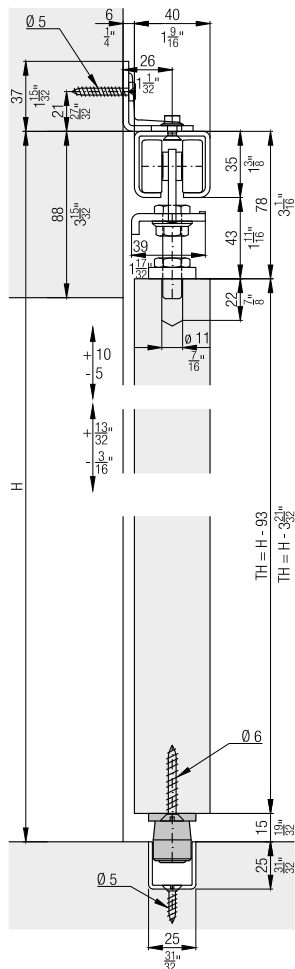

Mounting example with support bracket

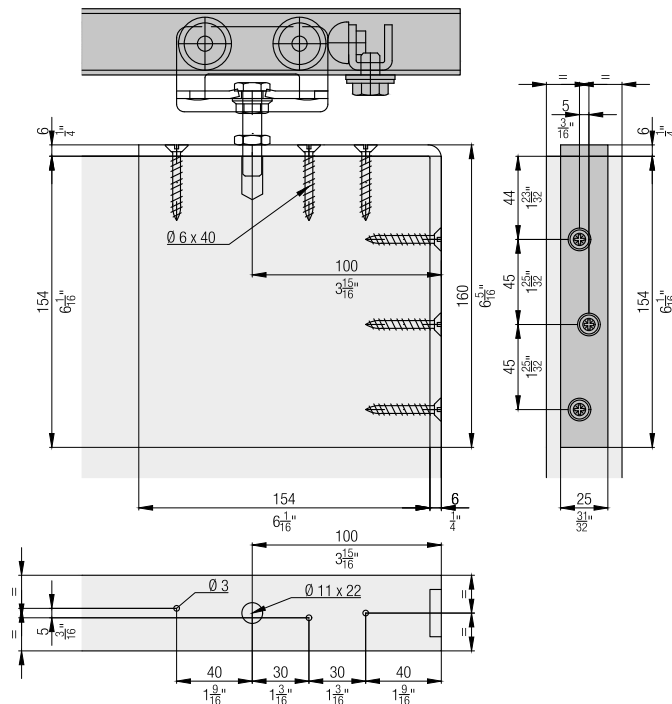

Accessories

– General accessories from page 518

Planning/execution

Further information about the product can be found on www.hawa.com.