


## Fitting for top-running wooden doors up to 45 kg (99 lbs.), with surface mounted running track. Wall or ceiling mounting.

### Product highlights


- Flexibility** Wall and ceiling mounting to the same system with accessories
- Productivity** Easy processing for minimal production and installation times

### Technical specifications


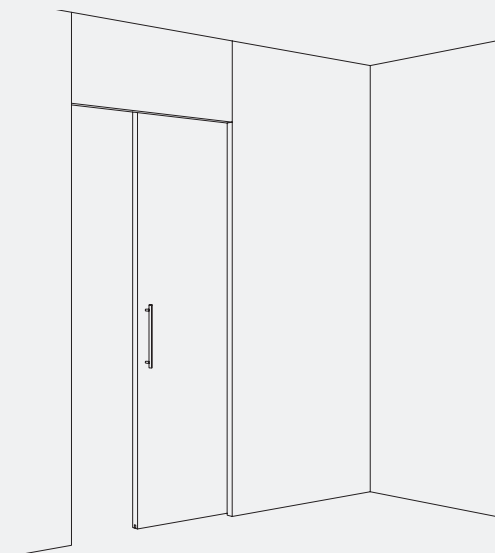







- Max. 45 kg (99 lbs.)
- Max. 2200 mm (7'2 5/8")
- Max. 1000 mm (3'3 3/8")
- 30–45 mm (1 3/16" to 1 25/32")

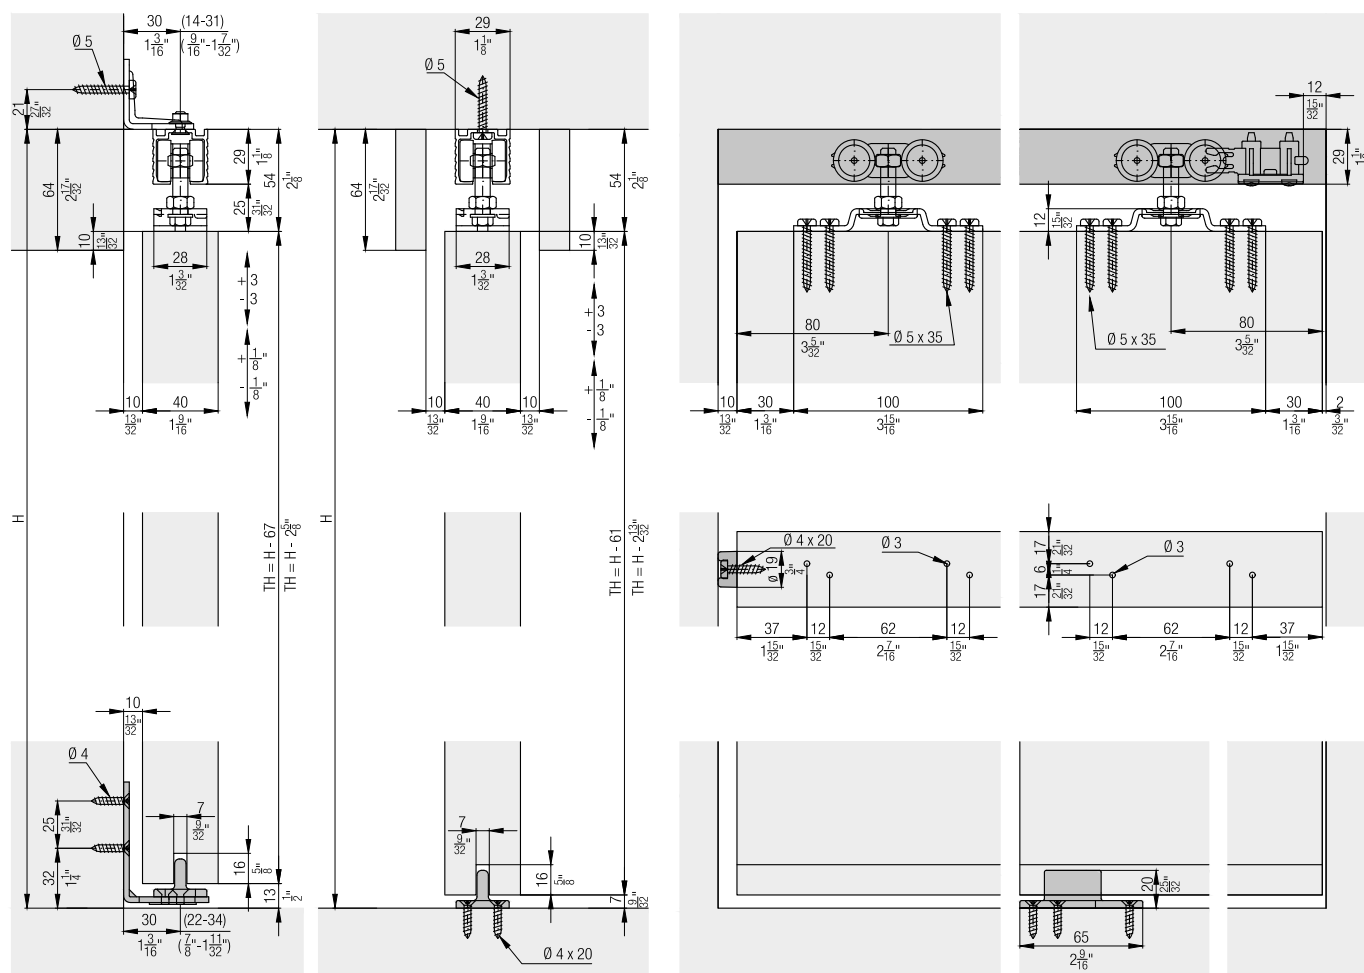










### Installation examples





**Set for ceiling or wall mounting,  
for 1 wooden door up to 45 kg (99 lbs.)**

		No.	
Hawa Porta 45 H, for 1 door		057.3045.071	
		057.3045.071	No.
<b>Set consisting of:</b>			
	Runner, plain bearings, housing plastic gray rollers plastic blue	2	057.3044.071
	Stopper, with retention spring, plastic, grey	1	057.3038.071
	Suspension bolt, M8x32 mm (5/16" x 1 1/4"), steel, zinc-plated	2	057.0123.104
	Hexagon nut M8, steel, zinc-plated	4	767.0808.100
	Support bracket, height and lateral adjustable, steel, zinc-plated	2	057.3129.101
	Pan head screw, 5x35 mm (3/16" x 1 3/8"), steel, zinc-plated	8	766.6051.135
	T-bottom-guide, adjustable, plastic, anthracite	1	057.3010.001
	Wall buffer, 19x10 mm (3/4" x 13/32"), rubber, black	1	024.0002.046
	Countersunk head screw, 4x20 mm (5/32" x 25/32"), steel, zinc-plated	4	766.5042.120

**Set for ceiling or wall mounting,  
for 1 wooden door up to 45 kg (99 lbs.)**

		No.	
Hawa Porta 45 H, with running track, 2000 mm (6' 6 3/4"), aluminum, for 1 door		057.3144.071	
		mm (inch)	No.
<b>Set consisting of:</b>			
	Runner, plain bearings, housing plastic gray rollers plastic blue	2	057.3044.071
	Stopper, with retention spring, plastic, grey	1	057.3038.071
	Suspension bolt, M8x32 mm (5/16" x 1 1/4"), steel, zinc-plated	2	057.0123.104
	Hexagon nut M8, steel, zinc-plated	4	767.0808.100
	Support bracket, height and lateral adjustable, steel, zinc-plated	2	057.3129.101
	Pan head screw, 5x35 mm (3/16" x 1 3/8"), steel, zinc-plated	8	766.6051.135
	T-bottom-guide, adjustable, plastic, anthracite	1	057.3010.001
	Wall buffer, 19x10 mm (3/4" x 13/32"), rubber, black	1	024.0002.046
	Countersunk head screw, 4x20 mm (5/32" x 25/32"), steel, zinc-plated	4	766.5042.120
	Running track, aluminum, pre-drilled	2,000 (6' 6 3/4 ")	1 057.3037.200




## Running tracks

		mm (inch)	No.
	Running track, aluminum, pre-drilled	1,700 (5' 6 15/16")	057.3037.170
		2,000 (6' 6 3/4")	057.3037.200
		2,500 (8' 2 7/16")	057.3037.250
		6,000 (19' 8 7/32")	057.3037.600
		cut to size	057.3037.990
	Disposable cover to running track Hawa Porta 45/60/100, plastic, black	2,000 (6' 6 3/4")	057.3098.001
		cut to size	057.3098.990


## Bracket set for wall mounting

	No.
Angle bracket for wall mounting, steel, zinc-plated, 10-piece set	057.3005.172


## Set consisting of:

	Wall mounting angle bracket, steel, zinc-plated	10	057.0169.101
	Countersunk head screw, M5x12 mm (3/16"x15/32"), steel, zinc-plated	10	762.5008.100
	Hexagon nut, M5, steel, zinc-plated	10	768.9025.100


## Bottom guide set for wall mounting

		No.
	T-floor-guide set, for wall mounting	057.3015.071

## Accessories

		No.
	Track cleaner, plastic, blue	057.3099.071

## Wall mounting

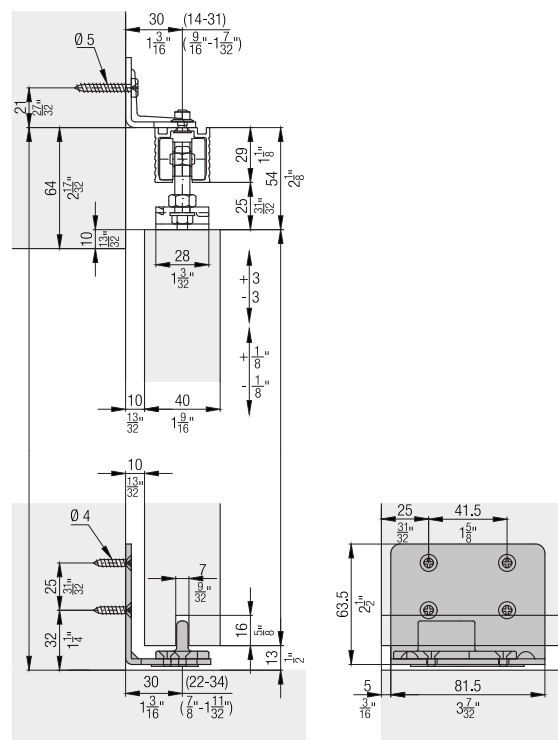

## Accessories

- Lock solutions from page 511
- General accessories from page 518

## Planning/execution

Further information about the product can be found on [www.hawa.com](http://www.hawa.com).