

Fitting for top-running wooden doors up to 60 kg (132 lbs.), with surface mounted running track. Optionally with soft and self closing mechanism. Wall or ceiling mounting.

Product highlights



Flexibility

Ceiling mounting with customer-provided panelling
or integrated clip-on panel in aluminium or wood



Productivity

Retrofitting of all components through the provided assembly opening, prevents contamination during construction work



Aesthetics

Also available in black as a “Black Edition” design option for a particularly attractive appearance

Technical specifications



Max. 60 kg (132 lbs.)



Max. 2700 mm (8'10 5/16")






Max. 1600 mm (5'3")



30–80 mm (1 3/16" to 3 5/32")



Installation examples

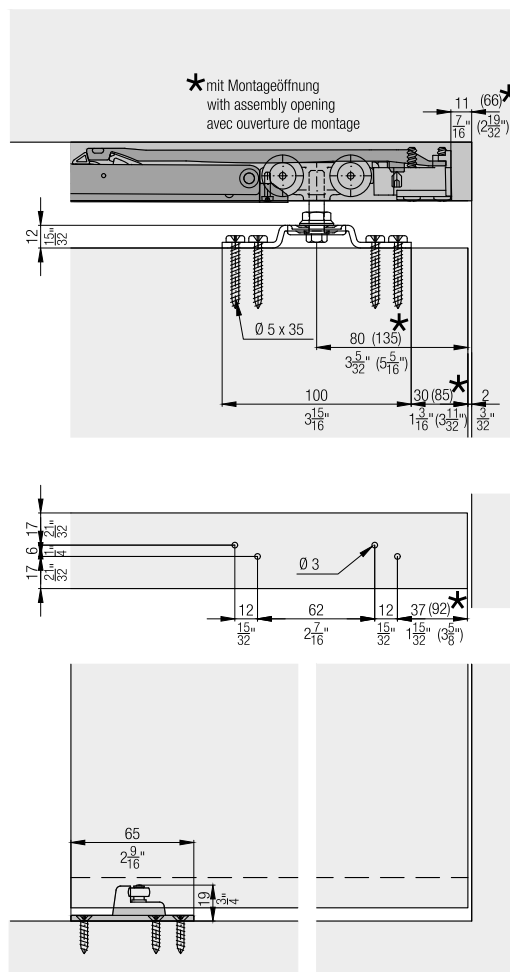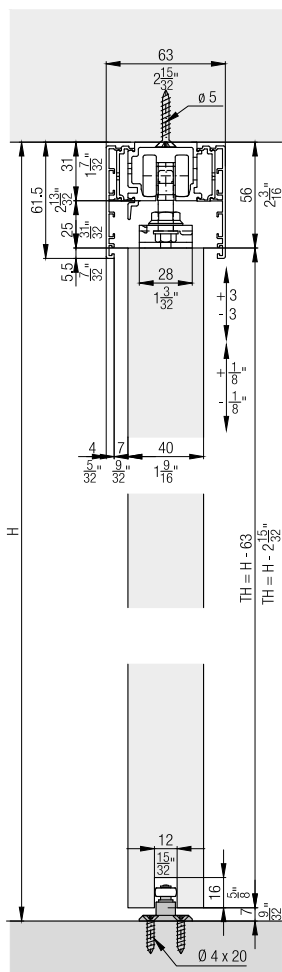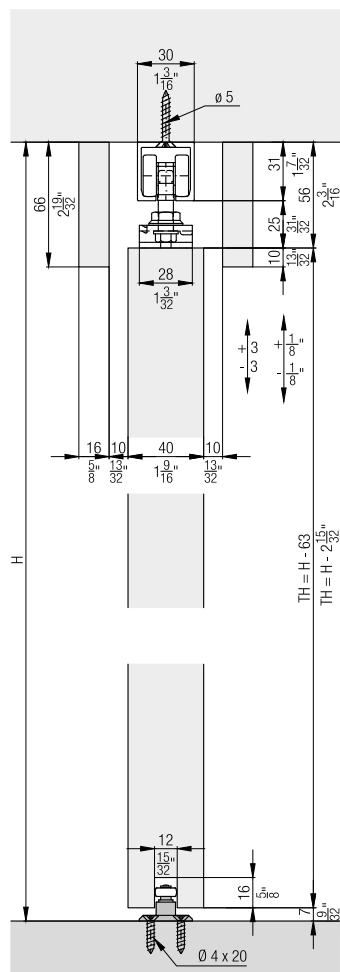










**Set for ceiling or wall mounting,
for 1 wooden door up to 60 kg (132 lbs.)**

	No.
Hawa Porta 60 H/HC, for 1 door	057.3138.071
Hawa Porta 60 H/HC, black, for 1 door	057.3138.075






Set consisting of:		057.3138.071	057.3138.075	No.
	Running gear, plain bearings, rollers plastic blue	2	2	057.3115.071
	Stopper, with retention spring, plastic, gray	2		057.3073.072
	Suspension bolt, M8x32 mm (5/16"x1 1/4"), steel, zinc-plated	2	2	057.0123.104
	Hexagon locking nut, M8, steel, zinc-plated	2	2	768.9005.101
	Support bracket, height and lateral adjustable, steel, zinc-plated	2	2	057.3129.101
	Pan head screw, 5x35 mm (3/16"x1 3/8"), steel, zinc-plated	8	8	766.6051.135
	Bottom guide, with roller, adjustable, plastic, anthracite	1	1	057.3120.071
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated	4		766.5042.120
	Stopper, with retention spring, plastic, black		2	057.3073.076
	Countersunk head screw, 4x20 mm, steel, zinc-plated		4	600.0000.817

**Set for ceiling or wall mounting,
for 1 wooden door up to 60 kg (132 lbs.)**

	No.
Hawa Porta 60 H, with running track, 2000 mm (6' 6 3/4"), aluminum, for 1 door	057.3140.071






Set consisting of:		mm (inch)	057.3140.071	No.
	Running gear, plain bearings, rollers plastic blue		2	057.3115.071
	Stopper, with retention spring, plastic, gray		2	057.3073.072
	Suspension bolt, M8x32 mm (5/16"x1 1/4"), steel, zinc-plated		2	057.0123.104
	Hexagon locking nut, M8, steel, zinc-plated		2	768.9005.101
	Support bracket, height and lateral adjustable, steel, zinc-plated		2	057.3129.101
	Pan head screw, 5x35 mm (3/16"x1 3/8"), steel, zinc-plated		8	766.6051.135
	Bottom guide, with roller, adjustable, plastic, anthracite		1	057.3120.071
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated		4	766.5042.120
	Running track, aluminum, pre-drilled	2,000 (6' 6 3/4")	1	057.3016.200

Running tracks


		mm (inch)	No.
	Running track, aluminum, pre-drilled	1,700 (5' 6 15/16")	057.3016.170
		2,000 (6' 6 3/4 ")	057.3016.200
		2,500 (8' 2 7/16")	057.3016.250
		6,000 (19' 8 7/32")	057.3016.600
		cut to size	057.3016.990
	Running track, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4 ")	057.3016.201
		2,500 (8' 2 7/16")	057.3016.251
		6,000 (19' 8 7/32")	057.3016.601
		cut to size	057.3016.991
	Running track, with assembly opening, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	057.3016.256
		cut to size	057.3016.998
	Combi running track, aluminum, pre-drilled	1,700 (5' 6 15/16")	057.3048.170
		2,000 (6' 6 3/4 ")	057.3048.200
		2,500 (8' 2 7/16")	057.3048.250
		3,500 (11' 5 25/32")	057.3048.350
		6,000 (19' 8 7/32")	057.3048.600
		cut to size	057.3048.990
	Combi running track, aluminum, black anodized, pre-drilled	2,500 (8' 2 7/16")	057.3048.255
		3,500 (11' 5 25/32")	057.3048.355
	Disposable cover to running track Hawa Porta 45/60/100, plastic, black	2,000 (6' 6 3/4 ")	057.3098.001
		cut to size	057.3098.990

Assembly set

	No.
Assembly set Hawa Porta 60/100, 2000 mm (6' 6 3/4")	057.3179.200
Assembly set Hawa Porta 60/100, 2500 mm (8' 2 7/16")	057.3179.250
Assembly set Hawa Porta 60/100, 3000 mm (9' 10 1/8")	057.3179.300

		mm (inch)	057.3179.200	057.3179.250	057.3179.300	No.
Set consisting of:						
	Running track, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4 ")	1			057.3174.200
	Assembly pin, plastic, gray		9	11	13	057.0201.001
	Countersunk head screw, 5x40 mm (3/16"x1 9/16"), steel, zinc-plated		10	12	14	766.3054.140
	Running track, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")		1		057.3174.250
	Running track, aluminum, anodized, pre-drilled	3,000 (9' 10 1/8 ")			1	057.3174.300

Panels

		mm (inch)	No.
	Clip-on panel, aluminum, anodized	2,500 (8' 2 7/16")	042.3004.250
		3,500 (11' 5 25/32")	042.3004.350
		6,000 (19' 8 7/32")	042.3004.600
		cut to size	042.3004.990
	Clip-on panel, aluminum, black anodized	2,500 (8' 2 7/16")	042.3004.255
		3,500 (11' 5 25/32")	042.3004.355

Clip-on components

	No.
	057.3117.001
	057.3117.005

Soft close

For soft closing in opening and closing direction
order 2 sets.

	No.
Soft close Hawa Porta 60/100, Divido 100, 10–60 kg (22–132 lbs.), 1 piece	042.3102.072

	042.3102.072	No.
	1	042.3106.072
	1	042.3105.001
	1	600.0000.566

Cover for assembly opening

	No.
Cover cap to assembly opening, 1-piece set	042.3114.071

	042.3114.071	No.
	1	042.0172.001
	1	600.0000.566

Bracket set for wall mounting

	No.
Angle bracket for wall mounting, steel, zinc-plated, 10-piece set	057.3005.172

Set consisting of:

	10	057.0169.101
	10	762.5008.100
	10	768.9025.100


Bottom guide set for wall mounting

	No.
	057.3128.171


Accessories

	No.
	042.3118.071
	600.0000.309
	057.3099.071


Assembly set/Wooden panel

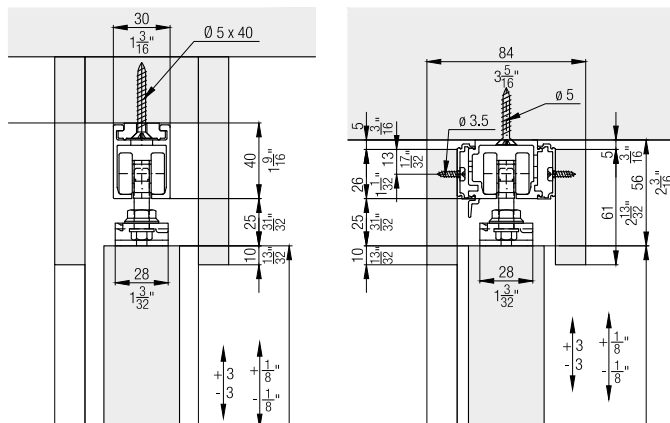


Optional: Wall mounting

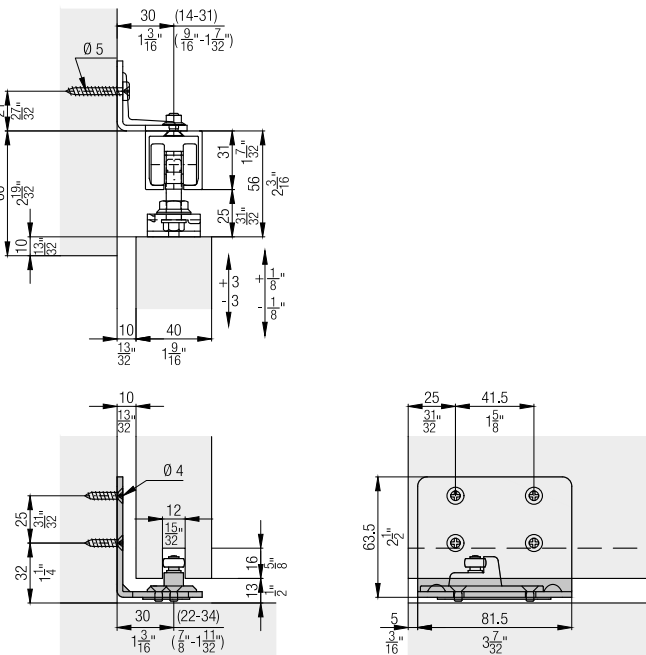

Soft close



	Z =					
	1			2		
	0	1	2	0	1	2
Hawa Porta 60/100 H/HC	1' 6 29/32"	1' 9 1/16"	1' 11 1/4"	2' 4 3/4"	2' 6 29/32"	2' 9 3/32"
Hawa Porta 60/100 HM/HMD/HMT	1' 6 29/32"	1' 9 1/16"	1' 11 1/4"	2' 4 3/4"	2' 6 29/32"	2' 9 3/32"
Hawa Porta 100 G/GU/GM/GMT	1' 6 29/32"	1' 9 1/16"	1' 11 1/4"	2' 4 3/4"	2' 6 29/32"	2' 9 3/32"
Hawa Porta 100 GF	1' 6 29/32"			2' 4 3/4"		
Hawa Porta 100 GW/GWF	1' 8 5/32"	1' 9 11/32"	1' 11 1/4"	2' 6"	2' 6 29/32"	2' 7 3/16"
Hawa Porta 100 GMD	1' 7 7/32"	1' 9 7/32"	1' 11 1/4"	2' 5 1/16"	2' 7 1/16"	2' 7 3/16"
Hawa Divido 100 H/HM/GR	1' 6 29/32"	1' 9 1/16"	1' 11 1/4"	2' 4 3/4"	2' 6 29/32"	2' 9 3/32"
Hawa Divido 100 GRM	1' 8 5/32"	1' 10 11/32"	1' 10 1/2"	2' 6"	2' 8 5/32"	2' 10 11/32"




≥ 320
 $\geq 1' 19 1/32"$
 $Z \geq 535$
 $Z \geq 1' 9 1/16"$

	Z =					
	1			2		
	0	1	2	0	1	2
Hawa Porta 60/100 H/HC	480	535	590	730	785	840
Hawa Porta 60/100 HM/HMD/HMT	480	535	590	730	785	840
Hawa Porta 100 G/GU/GM/GMT	480	535	590	730	785	840
Hawa Porta 100 GF	480			730		
Hawa Porta 100 GW/GWF	512	542	590	762	792	840
Hawa Porta 100 GMD	488	539	590	738	789	840
Hawa Divido 100 H/HM/GR	480	535	590	730	785	840
Hawa Divido 100 GRM	512	567	622	762	817	872

≥ 570
 $\geq 1' 10 7/16"$
 $Z \geq 840$
 $Z \geq 2' 9 1/16"$

* Montageöffnung
 assembly opening
 ouverture de montage



Beidseitig gedämpfte Ausführungen ohne stirnseitigen Zugang erfordern zwei Montageöffnungen.
 Versions with soft closing mechanism at both sides without access from the leading edge require two assembly openings.
 Les versions avec amortissement bilatéral sans accès frontal exigent deux ouvertures de montage.

Accessories

- Lock solutions from page 511
- General accessories from page 518

Planning/execution

Further information about the product can be found on www.hawa.com.