



Fitting for 2 synchronously opening wooden doors up to 60 kg (132 lbs.), with surface mounted running track. Wall mounting.

Product highlights



Standard applications can be extended with the Synchro option



Easy installation of the accessory, based upon basic elements



Also available in black as a “Black Edition” design option for a particularly attractive appearance

Technical specifications



60 kg (132 lbs.)




2700 mm (8' 10 5/16")







1200 mm (3' 11 1/4")

30–45 mm (1 3/16" to 1 25/32")

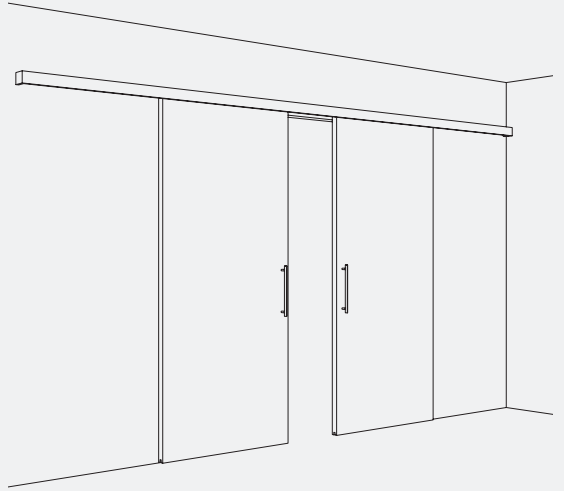

Installation examples

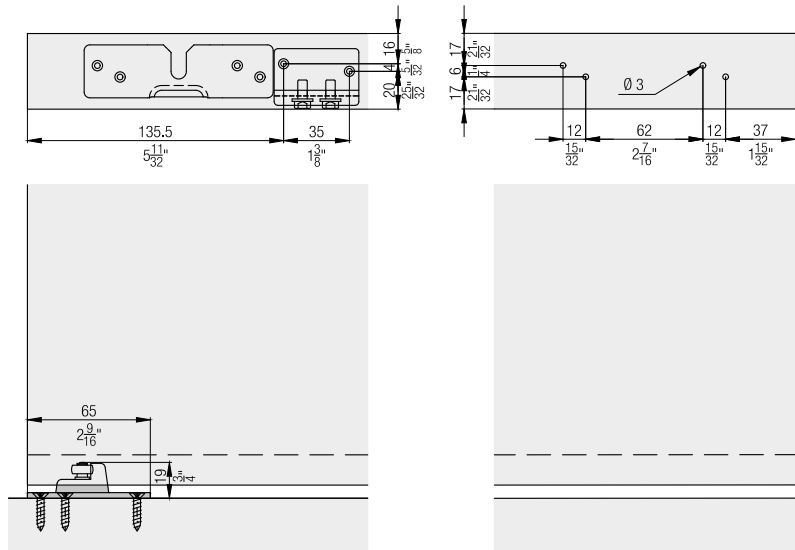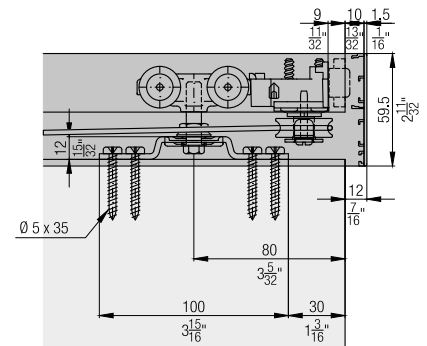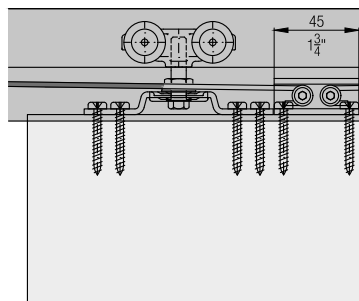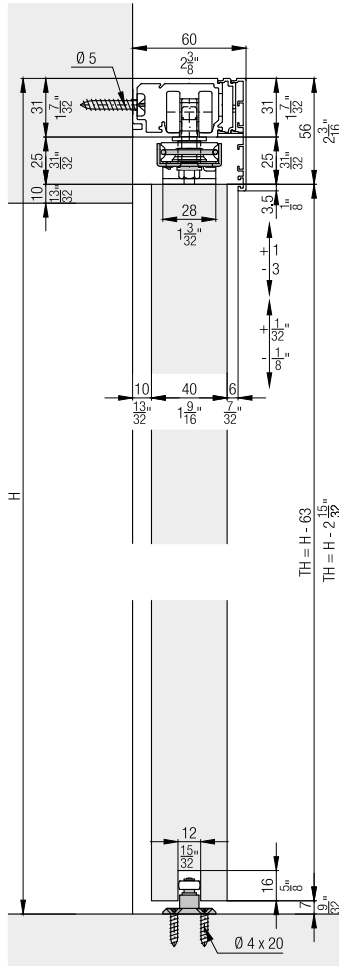









Set for ceiling mounting, for 1 wooden door up to 60 kg (132 lbs.) (order 2x)

	No.
Hawa Porta 60 H/HC, for 1 door	057.3138.071
Hawa Porta 60 H/HC, black, for 1 door	057.3138.075





		057.3138.071	057.3138.075	No.
Set consisting of:				
	Running gear, plain bearings, rollers, plastic, blue	2	2	057.3115.071
	Stopper, with retention spring, plastic, gray	2		057.3073.072
	Suspension bolt, M8x32 mm (5/16"x1 1/4"), steel, zinc-plated	2	2	057.0123.104
	Hexagon locking nut, M8, steel, zinc-plated	2	2	768.9005.101
	Support bracket, height and lateral adjustable, steel, zinc-plated	2	2	057.3129.101
	Pan head screw, 5x35 mm (3/16"x1 3/8"), steel, zinc-plated	8	8	766.6051.135
	Bottom guide, with roller, adjustable, plastic, anthracite	1	1	057.3120.071
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated	4		766.5042.120
	Stopper, with retention spring, plastic, black		2	057.3073.076
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated		4	600.0000.817

Synchro set


	No.
Hawa Porta 60/100 H/HC and Hawa Divido 100 H, Synchro, for 2 doors	042.3027.072

		042.3027.072	No.
Set consisting of:			
	Deviating roller, ball bearing	2	055.0101.001
	Cable safety, steel, zinc-plated	2	056.0124.101
	Clamp piece, steel, zinc-plated	2	057.0113.101
	Kevlar cable, D= 2.5 mm (3/32")	1	752.0059.104
	Flat washer, M5, 5.3/15/2 mm (3/16"/19/32"/3/32"), steel, zinc-plated	2	600.0000.681
	Rounded head screw, 5x25 mm (3/16"x31/32"), steel, zinc-plated	2	762.9455.000
	Head cap screw, with flange, M5x10 mm (3/16"x13/32"), steel, zinc-plated	4	762.9365.000
	Pan head screw, 5x35 mm (3/16"x1 3/8"), steel, zinc-plated	4	766.6051.135



Running tracks

		mm (inch)	No.
	Running track, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	057.3112.250
		3,500 (11' 5 25/32")	057.3112.350
		6,000 (19' 8 7/32")	057.3112.600
		cut to size	057.3112.990
	Running track, aluminum, black anodized, pre-drilled	2,500 (8' 2 7/16")	057.3112.255
		3,500 (11' 5 25/32")	057.3112.355
		cut to size	
	Running track, extended spacing of +9 mm (11/32") between door and wall, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	30617
		6,000 (19' 8 7/32")	30618
		cut to size	30668
	Running track, extended spacing of +20 mm (25/32") between door and wall, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	30619
		6,000 (19' 8 7/32")	30620
		cut to size	30669

Panels

		mm (inch)	No.
	Clip-on panel, aluminum, anodized	2,500 (8' 2 7/16")	042.3004.250
		3,500 (11' 5 25/32")	042.3004.350
		6,000 (19' 8 7/32")	042.3004.600
		cut to size	042.3004.990
	Clip-on panel, aluminum, black anodized	2,500 (8' 2 7/16")	042.3004.255
		3,500 (11' 5 25/32")	042.3004.355


Clip-on components

	No.
	057.3117.001
	057.3117.005

Fixing clamp for the end pieces of wooden or aluminum panels

	No.
Fixation clip for wooden and aluminum panel, 2-piece set	057.3126.071






Set consisting of:

	Fixation clip for wooden and aluminum panel, steel, zinc-plated	2	057.3126.101
---	---	---	--------------





Panel end component set, 59 mm (2 5/16"), aluminum, for running track 057.3112.xxx

	No.
Panel end component set, with fixation clip, 59x60 mm (2 5/16x2 3/8"), aluminum, black anodized	042.3028.056
Panel end component set, with fixation clip, 59x60 mm (2 5/16x2 3/8"), aluminum, anodized	042.3028.076



Set consisting of:

	Panel end component, 59 mm (2 5/16"), aluminum, black anodized	1	042.3028.956
	Bracker connector, steel, zinc-plated	2	057.3051.101
	Fixation clip for wooden and aluminum panel, steel, zinc-plated	1	057.3126.101
	Screw, M4x2.6 mm (5/32"x 1/8"), steel, zinc-plated	4	011.0101.171
	Panel end component, 59 mm (2 5/16"), aluminum, anodized	1	042.3028.906


**Panel end component set, 79 mm (3 1/8"), aluminum,
for running track 30617, 30618, 30619, 30620, 30668, 30669**

		No.	
Panel end component set, with fixation clip, 59x60 mm (3 1/8x2 3/8"), aluminum, anodized		30593	
		30593	No.
Set consisting of:			
	Panel end component, 79 mm (3 1/8"), aluminum, anodized	1	30590
	Bracker connector, steel, zinc-plated	2	057.3051.101
	Fixation clip for wooden and aluminum panel, steel, zinc-plated	1	057.3126.101
	Screw, M4x2.6 mm (5/32"x 1/8"), steel, zinc-plated	4	011.0101.171


End cap set for running track 057.3112.xxx

		No.	
End cap set, with fixation clip, plastic, anthracite		057.3132.072	
		057.3132.072	No.
Set consisting of:			
	End cap, plastic, anthracite	1	057.3132.071
	Fixation clip for wooden and aluminum panel, steel, zinc-plated	2	057.3126.101

Bottom guide set for wall mounting


		No.	
	Set bottom guide for wall mounting, with roller	057.3128.171	

Accessories


		No.	
	Track cleaner, plastic, blue	057.3099.071	

Further installation examples


Wall mounting rails with extended spacing of +9 mm/+20 mm (11/32"/25/32") between door and wall.

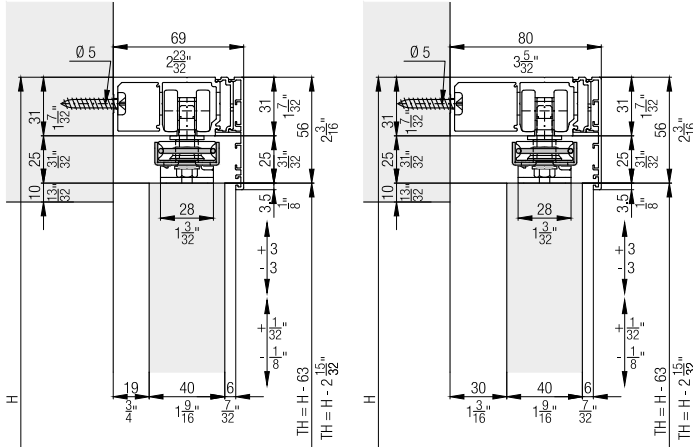


Wooden panel

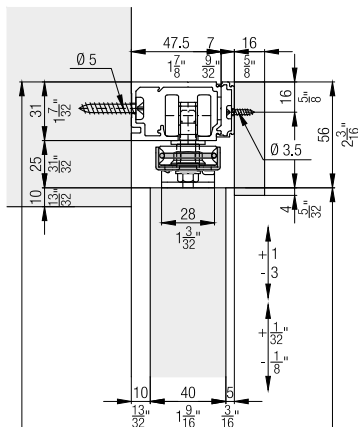


Optional: Wall bracket bottom guide

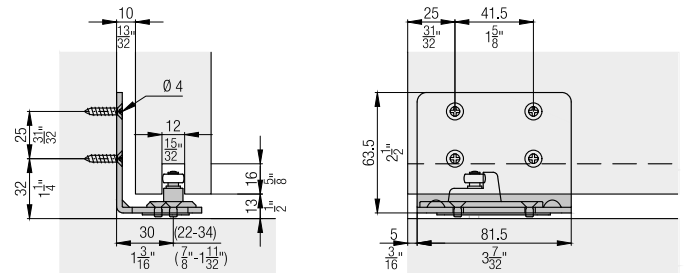

Calculations of panels

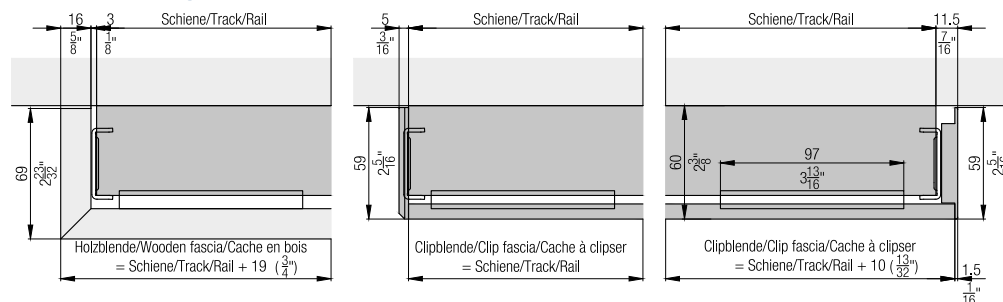

Calculations

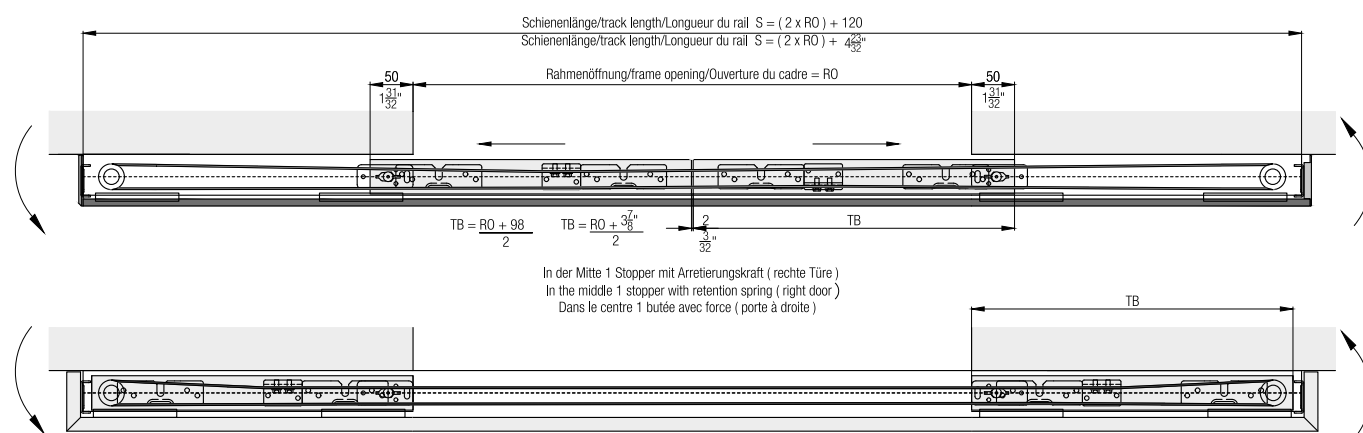

Accessories

- Lock solutions from page 511
- General accessories from page 518

Planning/execution

Further information about the product can be found on www.hawa.com.