

Fitting for top-running wooden doors up to 60 kg (132 lbs.), with surface mounted running track or running track flush with the ceiling. Optionally with soft and self closing mechanism. Ceiling mounting. Wall pocket solution.

Product highlights



Flexibility

Ceiling-integrated or surface-mounted pocket solutions possible



Productivity

Door can be installed in pocket after construction is complete

Technical specifications



Max. 60 kg (132 lbs.)




Max. 2700 mm (8'10 5/16")













Max. 1600 mm (5'3")



30–80 mm (1 3/16" to 3 5/32")

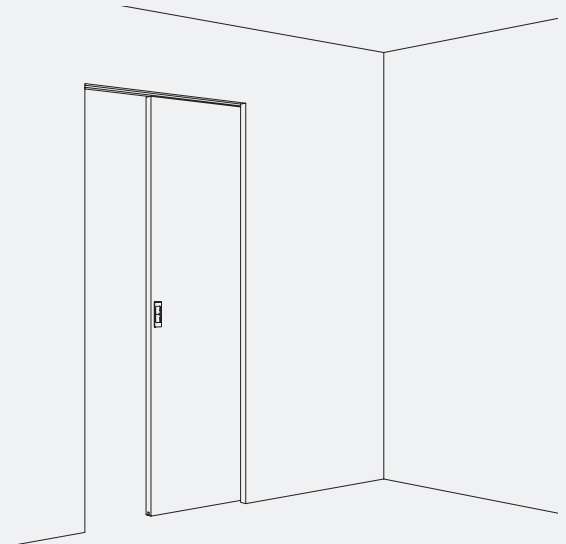

Installation examples

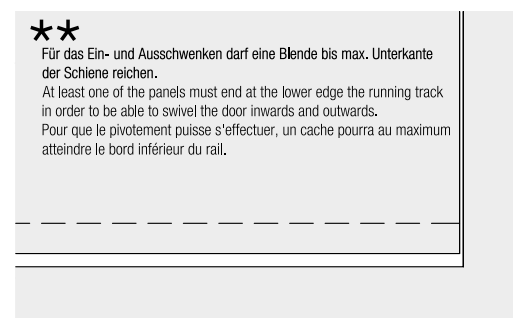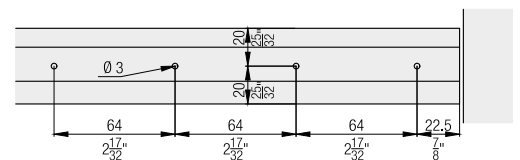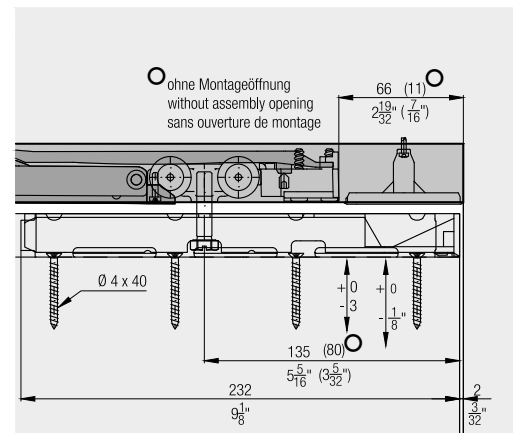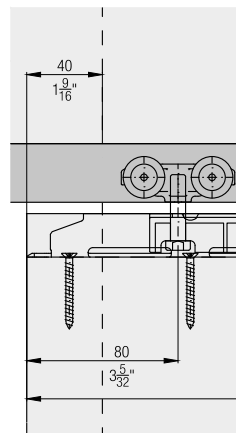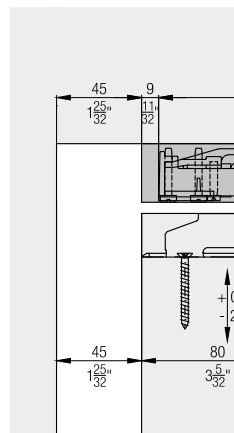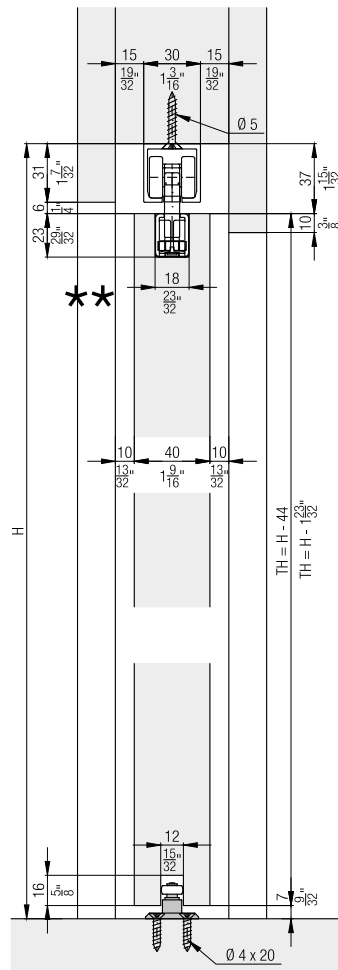












**

✖✖✖ Für das Ein- und Ausschwenken darf eine Blende bis max. Unterkante der Schiene reichen.













At least one of the panels must end at the lower edge the running track in order to be able to swivel the door inwards and outwards.

Pour que le pivotement puisse s'effectuer, un cache pourra au maximum atteindre le bord inférieur du rail.

**Set for ceiling mounting,
for 1 wooden door up to 60 kg (132 lbs.)**





		No.	
Hawa Porta 60 HMT Pocket, minimal installation height, for 1 door		057.3133.074	
Set consisting of:		057.3133.074	No.
	Running gear, plain bearings, rollers plastic blue	2	057.3115.071
	Stopper, with retention spring, plastic, gray	2	057.3073.072
	Hexagon head screw, M8x36 mm (5/16"x1 13/32"), steel, zinc-plated	1	042.0165.101
	Head cap screw, M8x35 mm (5/16"x1 3/8"), steel, zinc-plated	1	042.0175.001
	Cover cap, plastic, grey	1	600.0000.533
	Running gear holder, plastic, anthracite	1	042.0167.001
	Running gear holder, plastic, anthracite	1	042.0174.001
	Housing, steel, zinc-plated	1	042.0166.101
	Housing, steel, zinc-plated	1	042.0166.102
	Countersunk head screw, 4x40 mm (5/32"x1 9/16"), steel, zinc-plated	8	766.5040.140
	Bottom guide, with roller, adjustable, plastic, anthracite	1	057.3120.071
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated	4	766.5042.120

**Set for ceiling mounting,
for 1 wooden door up to 60 kg (132 lbs.)**






		No.	
Hawa Porta 60 HMT Pocket, with running track, 2000 mm (6' 6 3/4"), aluminum, anodized, for 1 door		057.3181.071	
Set consisting of:		mm (inch)	No.
	Running gear, plain bearings, rollers plastic blue	2	057.3115.071
	Stopper, with retention spring, plastic, gray	1	057.3073.072
	Spring loaded buffer Hawa Porta 60/100	1	27760
	Hexagon head screw, M8x36 mm (5/16"x1 13/32"), steel, zinc-plated	1	042.0165.101
	Head cap screw, M8x35 mm (5/16"x1 3/8"), steel, zinc-plated	1	042.0175.001
	Cover cap, plastic, grey	1	600.0000.533
	Running gear holder, plastic, anthracite	1	042.0167.001
	Running gear holder, plastic, anthracite	1	042.0174.001
	Housing, steel, zinc-plated	1	042.0166.101
	Housing, steel, zinc-plated	1	042.0166.102
	Countersunk head screw, 4x40 mm (5/32"x1 9/16"), steel, zinc-plated	8	766.5040.140
	Bottom guide, with roller, adjustable, plastic, anthracite	1	057.3120.071

Continued table on next page

Table continued from previous page






	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated	4	766.5042.120
	Assembly pin, plastic, gray	9	057.0201.001
	Countersunk head screw, 5x40 mm (3/16"x1 9/16"), steel, zinc-plated	10	766.3054.140
	Running track, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4 ")	1 057.3174.200

Running tracks

		mm (inch)	No.
	Running track, aluminum, pre-drilled	1,700 (5' 6 15/16 ")	057.3016.170
		2,000 (6' 6 3/4 ")	057.3016.200
		2,500 (8' 2 7/16 ")	057.3016.250
		6,000 (19' 8 7/32 ")	057.3016.600
		cut to size	057.3016.990
	Running track, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4 ")	057.3016.201
		2,500 (8' 2 7/16 ")	057.3016.251
		6,000 (19' 8 7/32 ")	057.3016.601
		cut to size	057.3016.991
	Running track, with assembly opening, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16 ")	057.3016.256
		cut to size	057.3016.998
	Running track, ceiling integration, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16 ")	27668
		3,500 (11' 5 25/32 ")	27667
		6,000 (19' 8 7/32 ")	30326
		cut to size	27669
	Disposable cover to running track Hawa Porta 45/60/100, plastic, black	2,000 (6' 6 3/4 ")	057.3098.001
		cut to size	057.3098.990

Assembly set




	No.
Assembly set Hawa Porta 60/100, 2000 mm (6' 6 3/4 ")	057.3179.200
Assembly set Hawa Porta 60/100, 2500 mm (8' 2 7/16 ")	057.3179.250
Assembly set Hawa Porta 60/100, 3000 mm (9' 10 1/8 ")	057.3179.300

	mm (inch)	057.3179.200	057.3179.250	057.3179.300	No.
	Running track, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4 ")	1		057.3174.200
	Assembly pin, plastic, gray		9	11	057.0201.001
	Countersunk head screw, 5x40 mm (3/16"x1 9/16"), steel, zinc-plated		10	12	766.3054.140
	Running track, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16 ")		1	057.3174.250
	Running track, aluminum, anodized, pre-drilled	3,000 (9' 10 1/8 ")		1	057.3174.300

Soft close

For soft closing in opening and closing direction order 2 sets.



	No.
Soft close Hawa Porta 60/100, Divido 100, 10–60 kg (22-132 lbs.), 1 piece	042.3102.072

	042.3102.072	No.
	Soft close, top running, 10–60 kg (22 to 132 lbs.), plastic	1 042.3106.072
	Trigger for soft close in buildings, zinc die casting	1 042.3105.001
	Screw set soft close	1 600.0000.566

Cover for assembly opening

	No.
Cover cap to assembly opening, 1-piece set	042.3114.071



Set consisting of:

		042.3114.071	No.
	Cover cap assembly opening, plastic, gray	1	042.0172.001
	Screw set soft close	1	600.0000.566


Screw set

	No.
Screw set for ceiling integration, +15 mm (+19/32")	057.3180.071






Set consisting of:

		057.3180.071	No.
	Hexagon screw, M8x51 mm (5/16"x2"), steel, zinc-plated	2	042.0165.103
	Head cap screw, M8x50 mm (5/16"x1 31/32"), steel, zinc-plated	1	042.0175.002



Bottom guide set for wall mounting

		No.
	Set bottom guide for wall mounting, with roller	057.3128.171



Accessories

	No.
	Key for dismounting, steel, zinc-plated 042.3119.101
	Spring loaded buffer Hawa Porta 60/100 27760
	Routing jig for assembly opening 042.3118.071
	Groove cutter to routing jig, Ø= 10 mm (13/32"), hard metal 600.0000.309
	Track cleaner, plastic, blue 057.3099.071

Assembly set/track installation Pocket

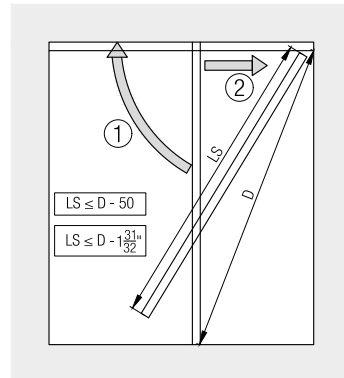
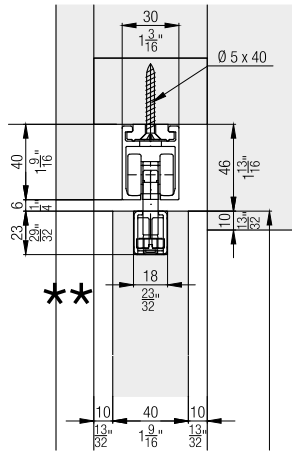


Wall mounting bottom guide




Ceiling integration


Recommendation: For systems integrated into the ceiling, provide assembly openings or front access to the system.

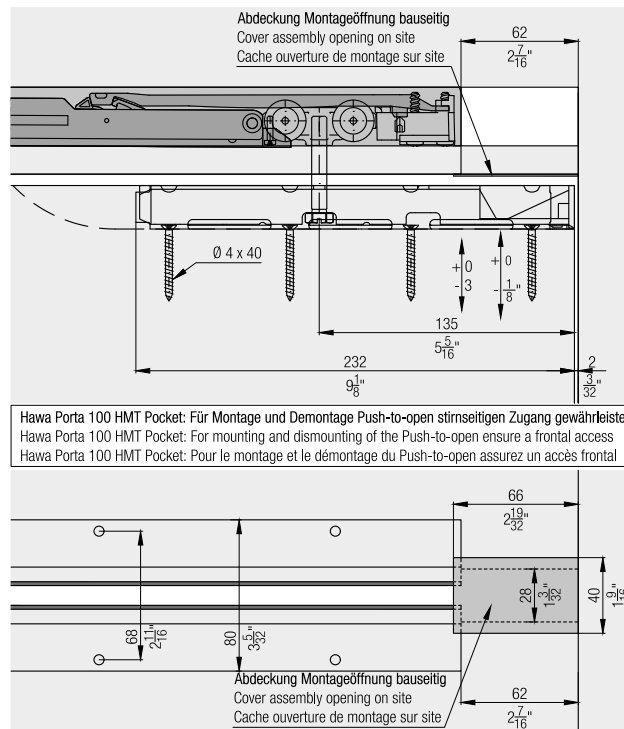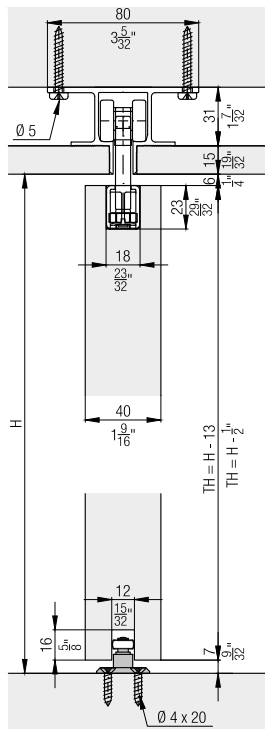

Spring stop

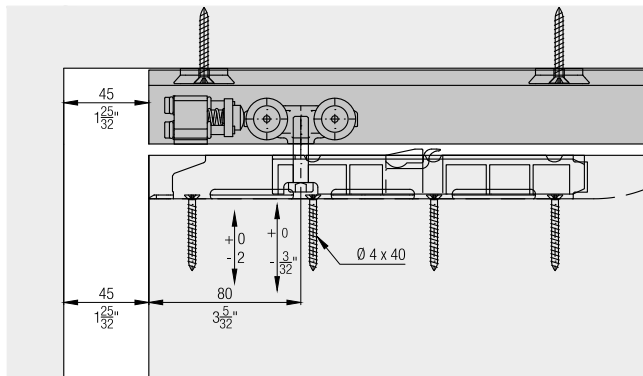

Calculations

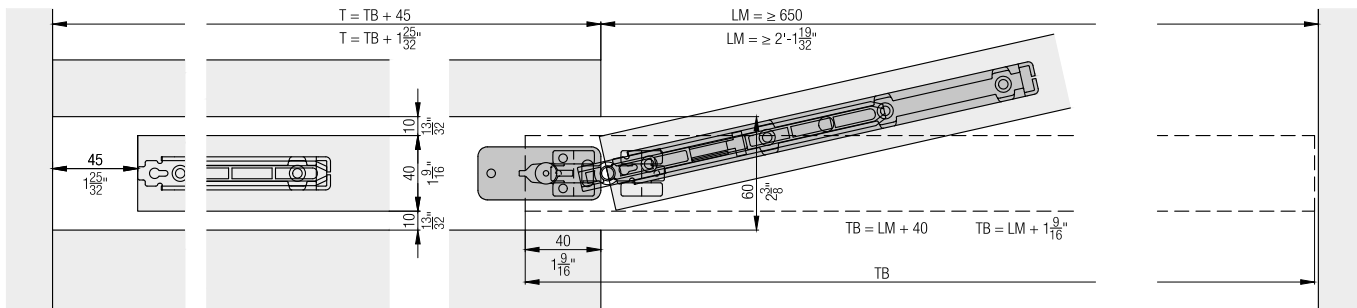

Soft close

	Z =					
	1			2		
	0	1	2	0	1	2
Hawa Porta 60/100 H/HC	1' 6 29/32"	1' 9 1/16"	1' 11 1/4"	2' 4 3/4"	2' 6 29/32"	2' 9 3/32"
Hawa Porta 60/100 HM/HMD/HMT	1' 6 29/32"	1' 9 1/16"	1' 11 1/4"	2' 4 3/4"	2' 6 29/32"	2' 9 3/32"
Hawa Porta 100 G/GU/GM/GMT	1' 6 29/32"	1' 9 1/16"	1' 11 1/4"	2' 4 3/4"	2' 6 29/32"	2' 9 3/32"
Hawa Porta 100 GF	1' 6 29/32"			2' 4 3/4"		
Hawa Porta 100 GW/GWF	1' 8 5/8"	1' 9 11/32"	1' 11 1/4"	2' 6"	2' 6 29/32"	2' 7 3/16"
Hawa Porta 100 GMD	1' 7 7/32"	1' 9 7/32"	1' 11 1/4"	2' 5 1/16"	2' 7 1/16"	2' 7 3/16"
Hawa Divido 100 H/HM/GR	1' 6 29/32"	1' 9 1/16"	1' 11 1/4"	2' 4 3/4"	2' 6 29/32"	2' 9 3/32"
Hawa Divido 100 GRM	1' 8 5/8"	1' 10 11/32"	1' 10 1/2"	2' 6"	2' 8 5/8"	2' 10 11/32"

★ Montageöffnung
assembly opening
ouverture de montage

	Z =					
	1			2		
	0	1	2	0	1	2
Hawa Porta 60/100 H/HC	480	535	590	730	785	840
Hawa Porta 60/100 HM/HMD/HMT	480	535	590	730	785	840
Hawa Porta 100 G/GU/GM/GMT	480	535	590	730	785	840
Hawa Porta 100 GF	480			730		
Hawa Porta 100 GW/GWF	512	542	590	762	792	840
Hawa Porta 100 GMD	488	539	590	738	789	840
Hawa Divido 100 H/HM/GR	480	535	590	730	785	840
Hawa Divido 100 GRM	512	567	622	762	817	872

Beidseitig gedämpfte Ausführungen ohne stimmseitigen Zugang erfordern zwei Montageöffnungen.
Versions with soft closing mechanism at both sides without access from the leading edge require two assembly openings.
Les versions avec amortissement bilatéral sans accès frontal exigent deux ouvertures de montage.

Accessories

- Lock solutions from page 511
- General accessories from page 518

Planning/execution

Further information about the product can be found on www.hawa.com.