


Fitting for 2 synchronously opening wooden doors up to 60 kg (132 lbs.), with surface mounted running track. Wall or ceiling mounting.

Product highlights


- Flexibility** Standard applications can be extended with the Synchro option
- Productivity** Easy installation of the accessory, based upon basic elements
- Aesthetics** Also available in black as a "Black Edition" design option for a particularly attractive appearance

Technical specifications

- Max. 60 kg (132 lbs.)
- Max. 2700 mm (8'10 5/16")
- Max. 1200 mm (3'11 1/4")
- 30–80 mm (1 3/16" to 3 5/32")

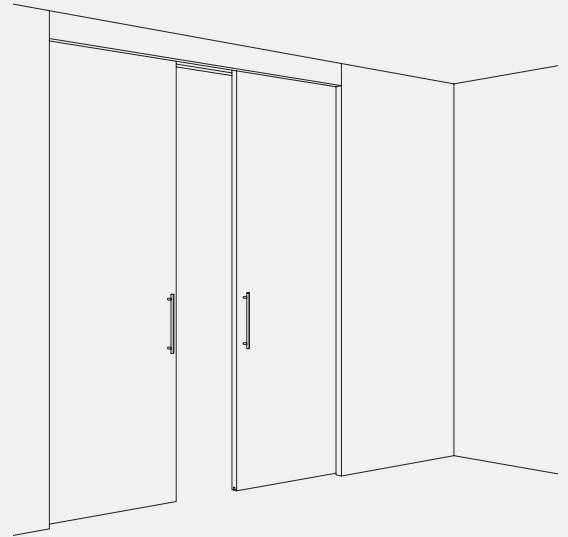



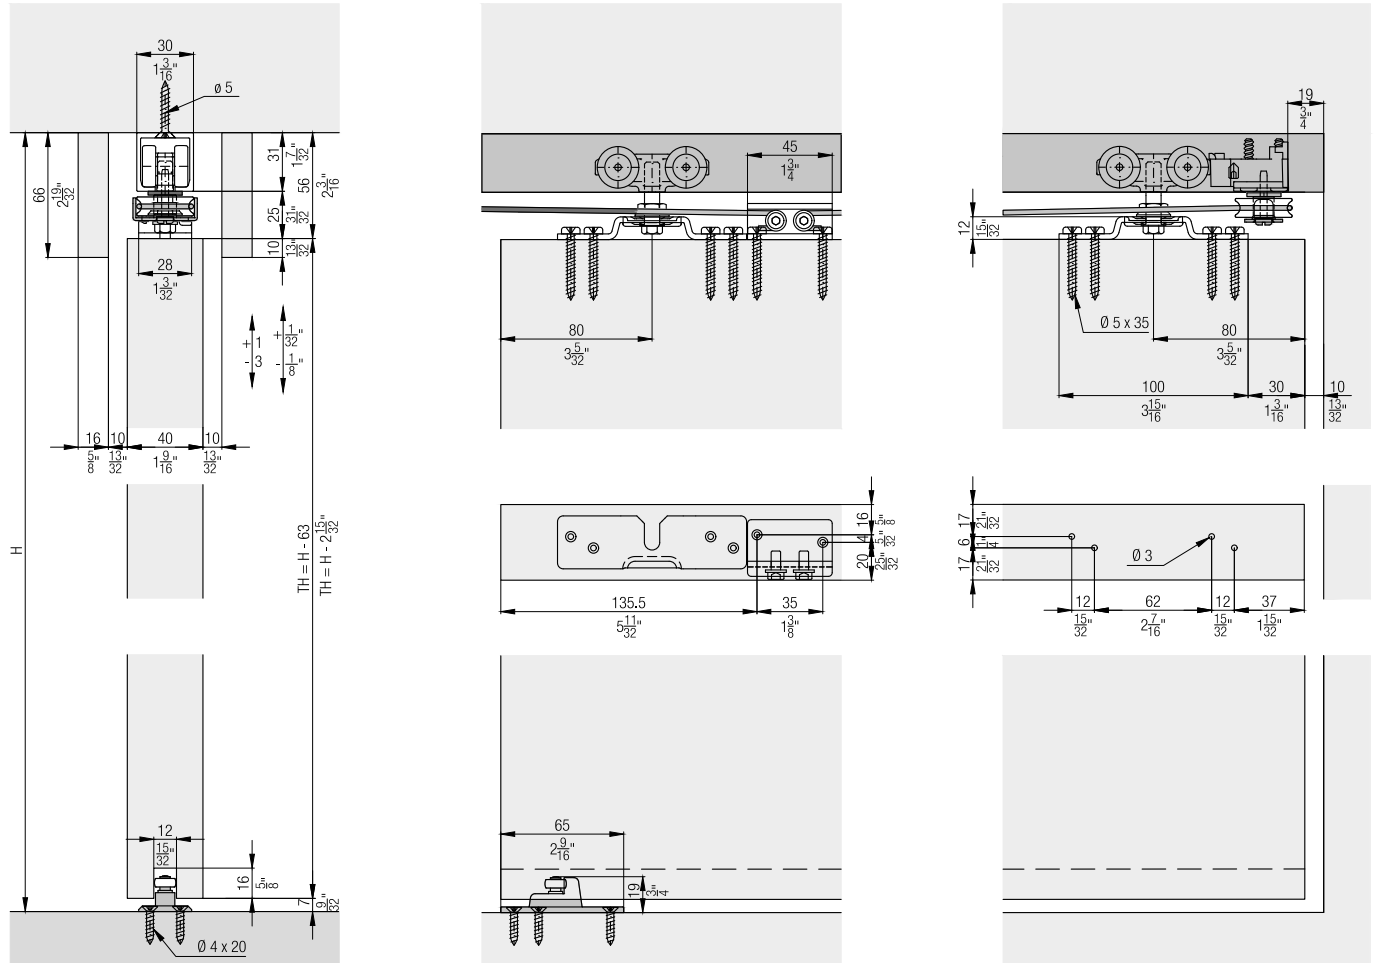


Installation examples











**Set for ceiling or wall mounting,
for 1 wooden door up to 60 kg (132 lbs.)**

	No.
Hawa Porta 60 H/HC, for 1 door	057.3138.071
Hawa Porta 60 H/HC, black, for 1 door	057.3138.075






		057.3138.071	057.3138.075	No.
Set consisting of:				
	Running gear, plain bearings, rollers plastic blue	2	2	057.3115.071
	Stopper, with retention spring, plastic, gray	2		057.3073.072
	Suspension bolt, M8x32 mm (5/16"x1 1/4"), steel, zinc-plated	2	2	057.0123.104
	Hexagon locking nut, M8, steel, zinc-plated	2	2	768.9005.101
	Support bracket, height and lateral adjustable, steel, zinc-plated	2	2	057.3129.101
	Pan head screw, 5x35 mm (3/16"x1 3/8"), steel, zinc-plated	8	8	766.6051.135
	Bottom guide, with roller, adjustable, plastic, anthracite	1	1	057.3120.071
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated	4		766.5042.120
	Stopper, with retention spring, plastic, black		2	057.3073.076
	Countersunk head screw, 4x20 mm, steel, zinc-plated		4	600.0000.817

Synchro set

	No.
Hawa Porta 60/100 H/HC and Hawa Divido 100 H, Synchro, for 2 doors	042.3027.072


		042.3027.072	No.
Set consisting of:			
	Deviating roller, ball bearing	2	055.0101.001
	Cable safety, steel, zinc-plated	2	056.0124.101
	Clamp piece, steel, zinc-plated	2	057.0113.101
	Kevlar cable, D= 2.5 mm (3/32")	1	752.0059.104
	Flat washer, M5, 5.3/15/2 mm (3/16"/19/32"/3/32"), steel, zinc-plated	2	600.0000.681
	Rounded head screw, 5x25 mm (3/16"x31/32"), steel, zinc-plated	2	762.9455.000
	Head cap screw, with flange, M5x10 mm (3/16"x13/32"), steel, zinc-plated	4	762.9365.000
	Pan head screw, 5x35 mm (3/16"x1 3/8"), steel, zinc-plated	4	766.6051.135

Running tracks


		mm (inch)	No.
	Running track, aluminum, pre-drilled	1700 (5' 6 15/16")	057.3016.170
		2000 (6' 6 3/4 ")	057.3016.200
		2500 (8' 2 7/16")	057.3016.250
		6000 (19' 8 7/32")	057.3016.600
		cut to size	057.3016.990
	Running track, aluminum, anodized, pre-drilled	2000 (6' 6 3/4 ")	057.3016.201
		2500 (8' 2 7/16")	057.3016.251
		6000 (19' 8 7/32")	057.3016.601
		cut to size	057.3016.991
	Running track, with assembly opening, aluminum, anodized, pre-drilled	2500 (8' 2 7/16")	057.3016.256
	Running track, aluminum, anodized, pre-drilled, with assembly opening	cut to size	057.3016.998
	Combi running track, aluminum, pre-drilled	1700 (5' 6 15/16")	057.3048.170
		2000 (6' 6 3/4 ")	057.3048.200
		2500 (8' 2 7/16")	057.3048.250
		3500 (11' 5 25/32")	057.3048.350
		6000 (19' 8 7/32")	057.3048.600
		cut to size	057.3048.990
	Combi running track, aluminum, black anodized, pre-drilled	2500 (8' 2 7/16")	057.3048.255
	Disposable cover to running track Hawa Porta 45/60/100, plastic, black	3500 (11' 5 25/32")	057.3048.355
		2000 (6' 6 3/4")	057.3098.001
		cut to size	057.3098.990

Assembly set


	No.
Assembly set Hawa Porta 60/100, 2000 mm (6' 6 3/4")	057.3179.200
Assembly set Hawa Porta 60/100, 2500 mm (8' 2 7/16")	057.3179.250
Assembly set Hawa Porta 60/100, 3000 mm (9' 10 1/8")	057.3179.300

		mm (inch)	057.3179.200	057.3179.250	057.3179.300	No.
	Running track, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4 ")	1			057.3174.200
	Assembly pin, plastic, gray		9	11	13	057.0201.001
	Countersunk head screw, 5x40 mm (3/16"x1 9/16"), steel, zinc-plated		10	12	14	766.3054.140
	Running track, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")		1		057.3174.250
	Running track, aluminum, anodized, pre-drilled	3,000 (9' 10 1/8 ")			1	057.3174.300


Panels

		mm (inch)	No.
	Clip-on panel, aluminum, anodized	2,500 (8' 2 7/16")	042.3004.250
		3,500 (11' 5 25/32")	042.3004.350
		6,000 (19' 8 7/32")	042.3004.600
		cut to size	042.3004.990
	Clip-on panel, aluminum, black anodized	2,500 (8' 2 7/16")	042.3004.255
		3,500 (11' 5 25/32")	042.3004.355


Clip-on components

		No.
	Clip component for wooden and aluminum panel, every 500 mm (1'7 11/16''), aluminium, pre-drilled	057.3117.001
	Clip component for wooden and aluminum panel, every 500 mm (1'7 11/16''), aluminum, black anodized, pre-drilled	057.3117.005



Accessories

		No.
	Track cleaner, plastic, blue	057.3099.071


Calculations

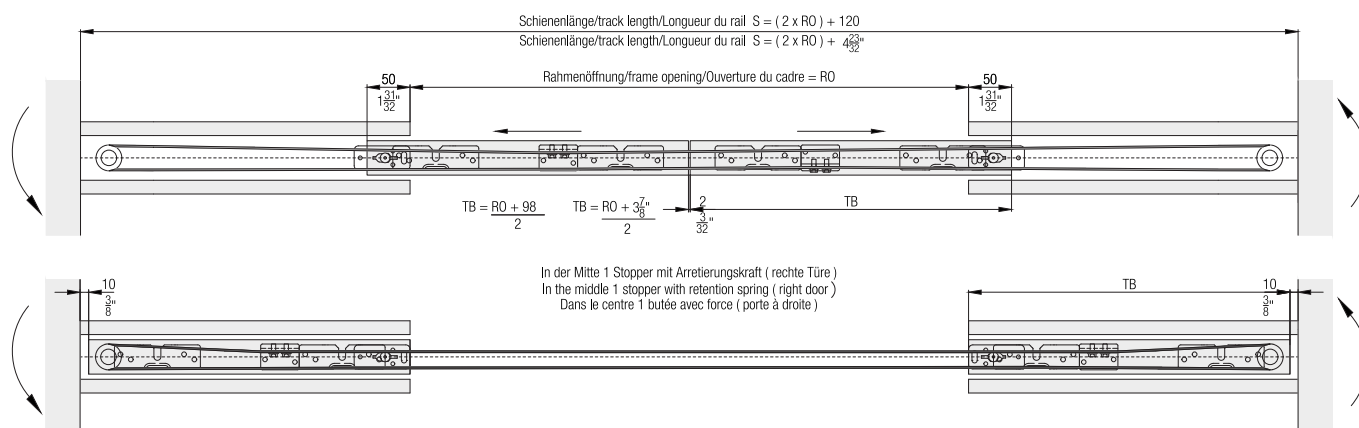

Wooden/aluminum panel

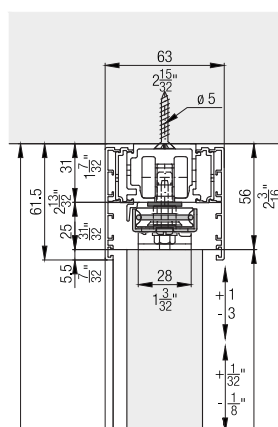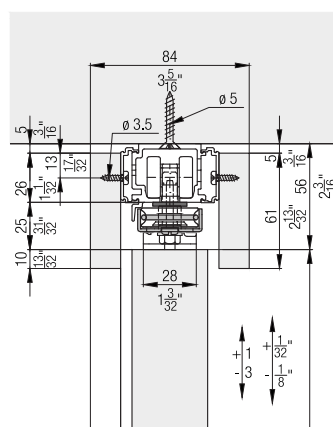

Assembly set

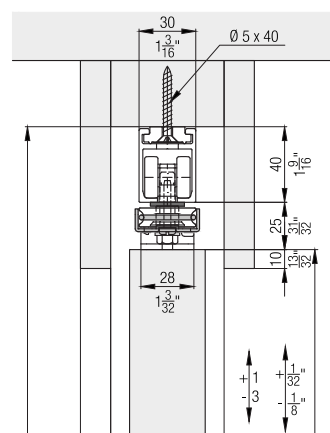

Accessories

- Lock solutions from page 511
- General accessories from page 518

Planning/execution

Further information about the product can be found on www.hawa.com.